


FHWA REGION NO.	STATE	PROJECT NUMBER	FISCAL YEAR	SHEET NUMBER	TOTAL SHEETS
X	KANSAS	X	X		X

MILBANK Commercial Pedestals

CP3B "SL" Series Switched Load Center Series

1Ø3 wire 120/240 or 208Y/120 volt
Typical applications: Traffic signal, parking lot, highway, & athletic field lighting

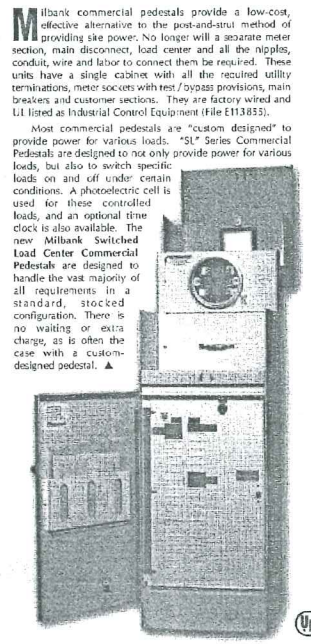


- Features:**
- These units include everything required for remote site service:
 - NEMA 3R construction
 - Expandable - Load centers allow for future expansion without costly modifications
 - All units feature 200 amp meter socket with optional field-installable fifth terminal kit available
 - 22 K ampere interrupting capacity (KAIC) standard
 - Optional mounting base can be embedded in concrete for fast, easy installation
 - Separate sealable and lockable utility termination section
 - Separate sealable and lockable metering section with the option of:
 - EITHER**
 - Milbank ring type socket with test / bypass blocks (conforms to EUSERC 308)
 - OR**
 - Milbank heavy duty ringless socket with lever bypass
 - Control circuit including:
 - FE receptacle, Locam window and glare shield
 - Hand-Off-Auto (HOA) switch
 - Control panel containing a 16-circuit load center for controlled loads
 - Free mounted DIN rail and pre-wired connector to add an optional "plug and play" time clock kit
 - A circuit directory to document configuration
 - A load center for "always on" loads that includes:
 - Main circuit breaker
 - Control power circuit breaker
 - Switched load center main breaker
 - Nine (200 amp model) or twelve (100 amp model) blank breaker slots
 - A circuit directory to document configuration

CP3B "SL" Series Stocking Information & Wiring Diagram

AVAILABLE FOR IMMEDIATE DELIVERY:

CATALOG NUMBER	OPTIONAL FIFTH TERMINAL KIT	AMPS	MAIN CB SPACES	CONTACTOR AMPERAGE	METER SOCKET TYPE
CP3B1110A22SL1	105J	100	(1,3)	60	Ring-type meter socket with test / bypass blocks
CP3B12110A22SL1	105J	200	(1,2,3,4)	100	Ring-type meter socket with test / bypass blocks
CP3B5110A22SL1	K3865	100	(1,3)	60	Ringless heavy duty meter socket with lever bypass
CP3B52110A22SL1	K3865	200	(1,2,3,4)	100	Ringless heavy duty meter socket with lever bypass

Accessories	Description
CP-TC7D	7-day time clock kit
CP-TC24H	24-hour time clock kit
CP-TCWIRE	Main four-pin connector and wiring harness for use with time clocks other than above
105J	Fifth terminal kit for use with ring-type meter sockets
K3865	Fifth terminal kit for use with ringless meter sockets
CP-16PDMNT-CALT	Pedestal mounting base (includes mounting hardware)
CP-ABK56	Anchor bolt kit (includes four 5/8" x 11 x 18" anchor bolts)

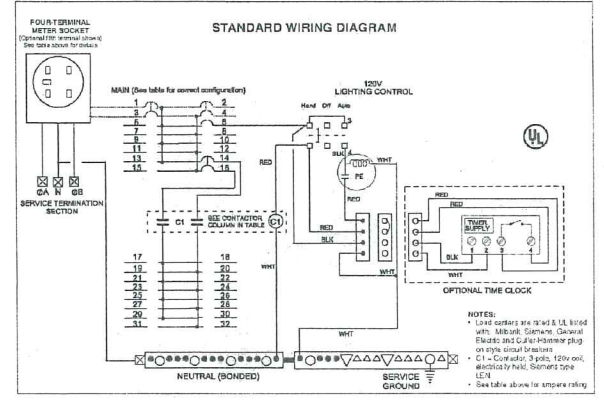

MILBANK CP3B "SL" Series Specifications

Commercial Pedestal:

The service pedestal provided shall be Milbank type (Catalog Number). The pedestal shall be of NEMA Type 3R rainproof construction and shall be UL listed as "enclosed industrial control equipment" (UL 508). External construction shall comply with UL508 requirements and shall be of galvanized steel with high grade #1427 Federal Specification 593 polyurethane industrial grade powder paint of 1.7 mil minimum thickness. Internal construction shall be galvanized steel and 1/2 mil minimum thickness polyurethane industrial grade powder coat painted or bare aluminum. All external fasteners, rivets, screws and bolts shall be stainless steel. No fasteners except sealing screws shall be removable by external access. Hinges shall be stainless steel and of the continuous piano hinge type.

The pedestal mounting bolts shall not be externally visible or accessible. The pedestal shall be offered with an optional base designed to be embedded in concrete. Either pedestal mounting base or anchor bolt kit is required for installation.

The service pedestal must have separate isolated sections for metering equipment, utility termination and customer equipment. The metering section must be padlockable and sealable and have a hinged swing back door with an integral hinged polycarbonate sealable window for access to demand meter. An external nameplate shall be permanently attached to the hood. A stainless steel handle shall be provided on the front exterior of the hood.

The utility termination section must be padlockable and sealable and shall have a stainless steel handle provided on a full cover. Sufficient clearance shall be provided for a 4 inch diameter conduit for utility cables. Utility loading lugs shall be UL listed and shall accommodate #6 - 350 kcmil conductors.

The customer compartment door must be padlockable and shall have provisions to hold the door in an open position. A pivot pin on the inside of the door shall hold all wiring schematics and instructions in a clear, weatherproof sleeve. Required I.T. labeling shall be located on the inside of the customer door. Distribution and control equipment shall be behind an internal dead-front door with a quarter-lam securing latch and be hinged to open more than 90 degrees. The deadfront door shall be hinged on the same side as the customer section door.

All distribution and control equipment shall be factory wired using 600 volt wire sized to NEC and UL requirements.

The service pedestal shall be rated 120/240 volt 1Ø3 wire or 208Y/120 volt 1Ø3 wire.

Utility requirements for this equipment vary. Always consult the serving utility for their requirements before ordering or installing this equipment.

The service pedestal shall be provided with the following equipment:

- A 200 amp Meter Socket Type that can be equipped with optional field-installable fifth terminal kit.
- A Main CB amp main circuit breaker that plugs into a 16-circuit unswitched load center. This breaker shall be identified by an engraved plaque.
- The service pedestal shall be rated for operation at (KAIC) ampere interrupting capacity. The provided documentation shall list circuit breaker combinations to be used for de-rated operation.
- A 16-circuit load center with all copper bus for back not to be switched by a photoelectric cell (un-switched load center). This load center shall be rated and labeled to accept Milbank, Siemens, Cutler-Hammer and General Electric plug-on circuit breakers.
- A 15 amp plug-on circuit breaker protection on the un-switched load center to provide power and protection for control circuits. This breaker shall be identified by an engraved plaque.
- A pre-wired test lock photoelectric cell receptacle.
- A polycarbonate photoelectric window and a glare shield.
- Wiring and connector provisions to add an optional 24-hour or 7-day time clock circuit. Incorporation of the time clock circuit shall be accomplished through a pre-wired connector assembly and shall not require any cutting or stripping of wires or the use of any tools.
- A rotary switch, labeled "Hand-Off-Auto," located inside the exterior door and accessible at the customer section deadfront. This switch shall energize all controlled loads in the "Hand" position, disable all controlled loads in the "Off" position, and permit operation of all controlled loads by the photoelectric cell (and time clock, if used) in the "Auto" position.
- A 40 amp 3-pole electrical held lighting contactor with 120 volt AC coil (Siemens type IEN) to control power to switched loads.
- A 16-circuit load center with all copper bus for back not to be switched by a photoelectric cell (switched load center). This load center shall be rated and labeled to accept Milbank, Siemens, Cutler-Hammer and General Electric plug-on circuit breakers.

BRANCH CIRCUIT PANEL SUMMARY

PANEL DESIG.	120/240V 1Ø3W 2/77/480V 3Ø4W	MOUNTING	MOUNTING S F	BRANCH CIRCUIT BREAKERS (AMPS/POLE)						SUPPLY DEVICE RATING (SW/FUSE)	CIRCUIT NUMBER	FEEDER IDENT.	
				STATUS	1Ø/1	2Ø/2	3Ø/3	4Ø/4	5Ø/5				
A				ACTIVE	1	3	1				11		2
				SPARE	3	-							
				SPARE									
				ACTIVE									
				SPARE									

FEEDER SCHEDULE


FEEDER IDENT.	CONDUCTORS			GROUND SIZE PER SET	ISOLATED GROUND SIZE PER SET	CONDUIT SIZE PER SET
	SETS	QUANT. PER SET	SIZE			
1	1	4	#3 THHN	#8	#1 1/4"	
2	1	4	#3 THHN	#8	#1 1/4"	
3	1	2	#4 THHN	#4	#1 1/4"	
4	1	2	#6 THHN	#6	#1"	
5	1	2	#8 THHN	#8	#3/4"	
6	1	2	#10 THHN	#10	#3/4"	

- GENERAL NOTES:**
- ALL CONDUITS TO BE ROUTED MINIMUM 30" BELOW GRADE.
 - E.C. SHALL VISIT JOBSITE PRIOR TO BID AND VERIFY ALL EXISTING CONDITIONS AND REQUIREMENTS.
 - E.C. TO CLOSELY COORDINATE ELECTRICAL INSTALLATION WITH PAVING AND CONCRETE WORK ON THIS PROJECT.
 - E.C. TO VERIFY ALL SERVICE ENTRANCE CONNECTIONS REQUIREMENTS WITH K.G.&E. PRIOR TO BID.
 - ALL CONDUITS BELOW GRADE TO BE SCH. 40 PVC WITH STEEL ELLS AND RISERS.
 - ALL POLE BASES, AND CONCRETE WORK ASSOCIATED WITH ELECTRICAL INSTALLATION TO BE THE RESPONSIBILITY OF THE ELECTRICAL CONTRACTOR.

LIGHT FIXTURE SCHEDULE

FXT LTR	MANUFACTURER	CATALOG NUMBER	LAMPS		FIXT. VOLT.	FINISH	MOUNTING	REMARKS
			NO.	TYPE				
A	HOLOPHANE	CBART30J/2/TWA/ES400HPMBA/CS	2	400 HPS	208V	BLACK	30' POLE	SEE DETAIL FOR FIXTURE & POLE
B	HOLOPHANE	CBART30J/1/TWA/ES400HPMBA/CS	1	400 HPS	208V	BLACK	30' POLE	SEE DETAIL FOR FIXTURE & POLE

CP3B "SL" Series Installation

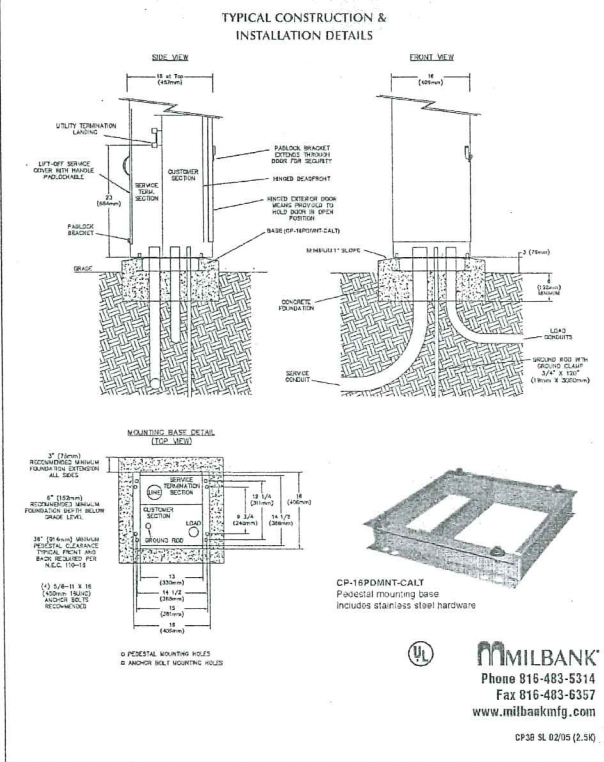

Explanation of Underground Service Pedestal Model Numbers:

CP3B 41112A22BKCPC-T C7D

- Meter Sockets**
 - 0 = No socket
 - 1 = 1 Ring type socket with test bypass provision
 - 2 = 2 Ring type socket with test bypass provision
 - 3 = 1 Ring type socket with 1-wire test bypass provision
 - 4 = 1 Ring type socket with test bypass provision
 - 5 = 1 Ringless socket with lever test bypass provision
 - 6 = 1 Ringless socket with test bypass provision
 - 7 = 1 Ringless socket with test bypass provision
 - 8 = 1 Ringless socket with test bypass provision
 - 9 = 1 Ringless socket with test bypass provision
- Amperage**
 - 0 = No rating
 - 1 = 150amps
 - 2 = 200amps
 - 3 = 125amps
 - 4 = 400amps (Non EUSERC)
- System Voltage**
 - 0 = 120V, 1Ø, 2W (4 Jaw)
 - 1 = 120/240V, 1Ø, 3W (4 Jaw)
 - 2 = 208Y/120V, 1Ø, 3W (4 Jaw + 105J)
 - 3 = 240/120V, 1Ø, 3W (4 Jaw)
 - 4 = 480Y/277V, 1Ø, 3W (4 Jaw + 105J)
 - 5 = 208Y/120V, 3Ø, 4W (7 Jaw)
 - 6 = 240/120V, 3Ø, 4W (7 Jaw)
 - 7 = 240V, 3Ø, 3W (7 Jaw)
 - 8 = 480Y/277V, 3Ø, 4W (7 Jaw)
 - 9 = 480V, 3Ø, 3W (7 Jaw)
 - A = No rating
 - B = 480Y/277V, 3Ø, 4W (7 Jaw)
 - C = 120/240V, 1Ø, 3W (4 Jaw)
 - D = 240/120V, 1Ø, 3W (4 Jaw)
 - E = 480V, 1Ø, 2W (4 Jaw)
- Service/Main Disconnect**
 - 0 = No Main (main disconnect per utility)
 - 1 = (1) Circuit Breaker Main
 - 2 = (2) Circuit Breaker Service Disconnects
 - 3 = (1) T-Fuse, 4-Pole Main
 - 4 = (2) Circuit Breaker Service Disconnects
 - 5 = (1) 4-Pole Main (100A Max)
 - 6 = (1) 4-Pole 100A (1) 3-Pole 100A
 - 7 = (1) 4-Pole 100A (1) 3-Pole 100A
 - 8 = (2) Circuit Breaker Service Disconnects with Interlock
 - 9 = (2) T-Fuse Service Disconnects
 - C = (2) T-Fuse Service Disconnects
- Enclosure Size**
 - A = CP3B Single, 18"x17"x48" (TYPE B)
 - B = CP3B Double, 24"x17"x48" (TYPE C)
 - C = CP3B 6"x18"x48" (TYPE H)
 - D = CP3B 30"x24"x48"
 - E = CP3B 48"x24"x48"
 - F = CP3B 18"x17"x48" (No meter socket - Low profile)
 - G = CP3B 18"x17"x48" (No meter socket - Short head)
 - H = CP3B 24"x17"x48" (No meter socket - Short head)
 - I = CP3B 18"x17"x48" (No meter socket - Low profile)
 - J = CP3B 18"x17"x48" (No meter socket - Low profile)
 - K = CP3B 18"x17"x48" (No meter socket - Low profile)
 - L = CP3B 18"x17"x48" (No meter socket - Low profile)
 - M = CP3B 18"x17"x48" (No meter socket - Low profile)
 - N = CP3B 18"x17"x48" (No meter socket - Low profile)
- Distribution Interior**
 - A = (2) 12 amp load center, (1) 12 amp load center
 - B = (2) 12 amp load center, (1) 12 amp load center
 - C = (2) 12 amp load center, (1) 12 amp load center
 - D = (2) 12 amp load center, (1) 12 amp load center
 - E = (2) 12 amp load center, (1) 12 amp load center
 - F = (2) 12 amp load center, (1) 12 amp load center
 - G = (2) 12 amp load center, (1) 12 amp load center
 - H = (2) 12 amp load center, (1) 12 amp load center
 - I = (2) 12 amp load center, (1) 12 amp load center
 - J = (2) 12 amp load center, (1) 12 amp load center
 - K = (2) 12 amp load center, (1) 12 amp load center
 - L = (2) 12 amp load center, (1) 12 amp load center
 - M = (2) 12 amp load center, (1) 12 amp load center
 - N = (2) 12 amp load center, (1) 12 amp load center
 - O = (2) 12 amp load center, (1) 12 amp load center
 - P = (2) 12 amp load center, (1) 12 amp load center
 - Q = (2) 12 amp load center, (1) 12 amp load center
 - R = (2) 12 amp load center, (1) 12 amp load center
 - S = (2) 12 amp load center, (1) 12 amp load center
 - T = (2) 12 amp load center, (1) 12 amp load center
 - U = (2) 12 amp load center, (1) 12 amp load center
 - V = (2) 12 amp load center, (1) 12 amp load center
 - W = (2) 12 amp load center, (1) 12 amp load center
 - X = (2) 12 amp load center, (1) 12 amp load center
 - Y = (2) 12 amp load center, (1) 12 amp load center
 - Z = (2) 12 amp load center, (1) 12 amp load center



Integrated Consulting Engineers, Inc.
2604 W 9th St., Ste. 100 • Wichita, KS 67203
316-264-3588 • 316-264-3348 • iceng@iceng.com

INTRUST ARENA PARKING LOT D ELECTRICAL PLANS WICHITA, KANSAS

Ruggles & Bohm, P.A.
Engineering, Surveying, Land Planning

924 North Main
Wichita, Kansas 67203
www.rbkansas.com

(316) 264-8008
(316) 264-4621 fax
E-mail: info@rbkansas.com

DESIGN: []
DRAWN: []
REVIEW: []
UTILITY: []
DATE: []

SHEET: D8 OF 15