




B2A 19-73

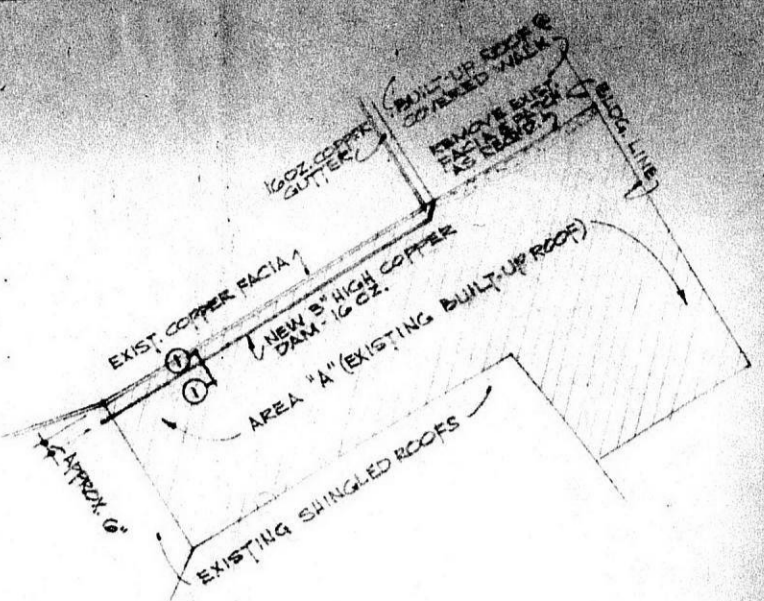


ENLARGED PLAN
OF AREA "A" SCALE 1/8" = 1'-0"

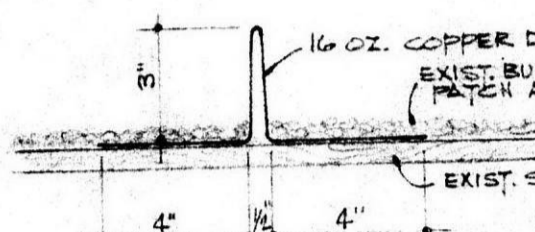

SECTION 1-1
3/4" = 1'-0"

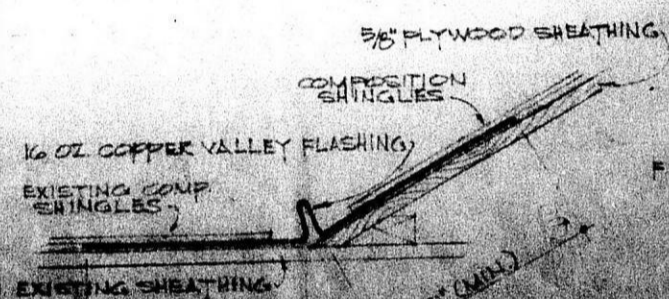


SECTION 2-2
1/2" = 1'-0"

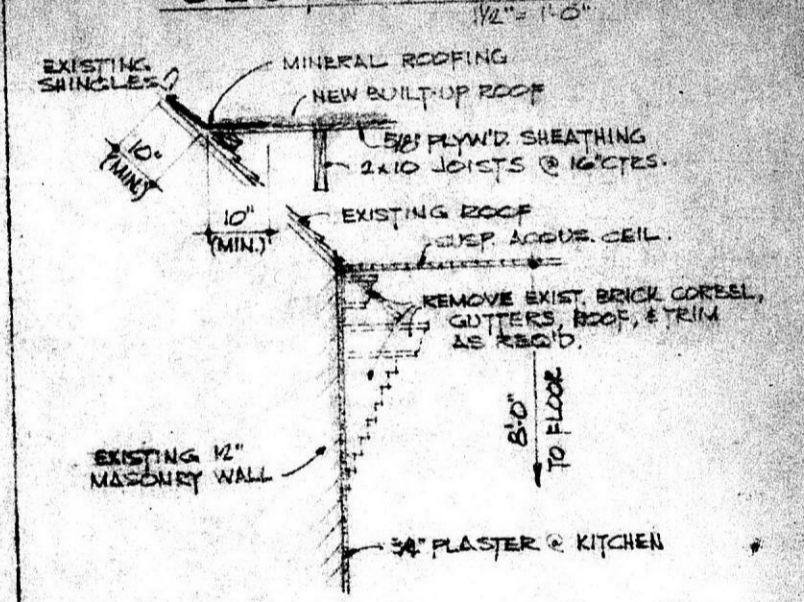

SECTION 3-3
1/2" = 1'-0"


ASPHALT PAVING NOTES:

- AREA "A": REQUIRES SUB-BASE & ASPHALT TOPPING -- ALTERNATE #1 ONLY.
- AREA "B": REQUIRES SUB-BASE & ASPHALT TOPPING -- BASE BID ONLY.
- AREA "C": REQUIRES ASPHALT TOPPING THROUGHOUT & REQUIRES SUB-BASE ONLY AS SHOWN TO BRING TO PROPER GRADE AND IN SOME AREAS WHICH DO NOT HAVE "B" BASE. (CONTRACTOR EXAM. & SITE) -- IN BASE BID.

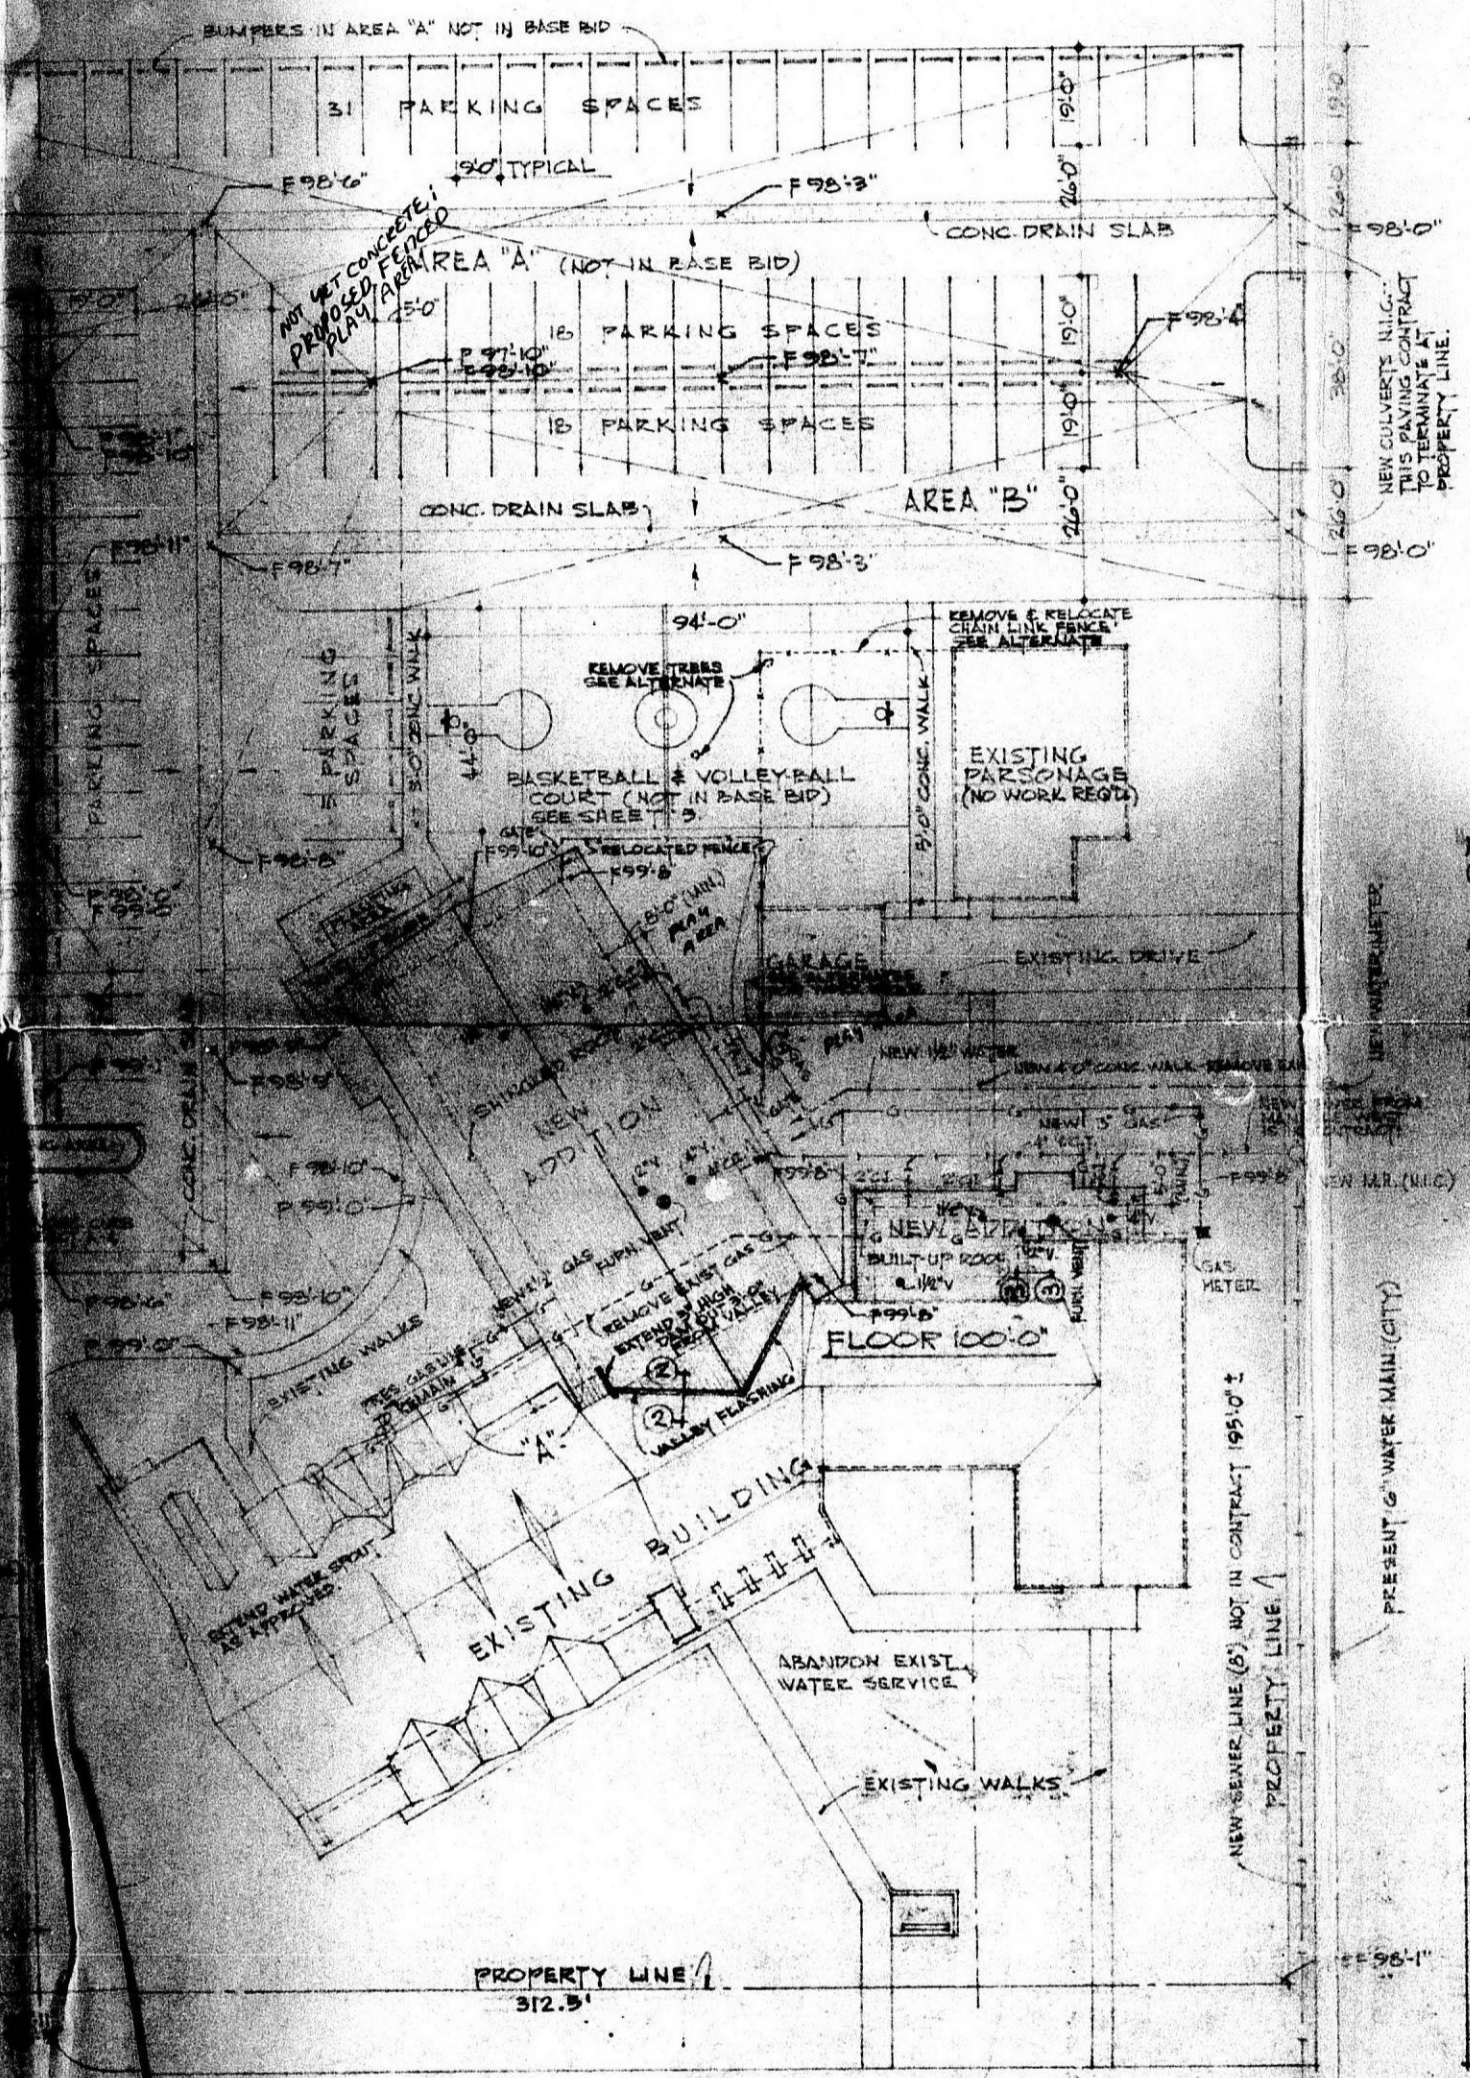


PLOT PLAN
SCALE 1" = 30'-0"


- NOTES:
- ON CONC. SLAB DRAINAGE 1" IN 40'-0" S.
 - ON ASPHALT PAVING 1" IN 10'-0" S.
 - AREA AT "A" IS TO BE UNDER RECOVERER'S RESPONSIBILITY AND WARRANTY. REPAIR AS NECESSARY.
 - ON DRIVE IN ON PAVING SHALL BE STRAIGHT SLOPE BETWEEN GRADES SHOWN UNLESS INDICATED. TERRACE SLOPE IN AREA OF CONSTRUCTION. CONTRACTOR REMOVE ANY SUCH TERRACE THEY WANT TO HAVE.

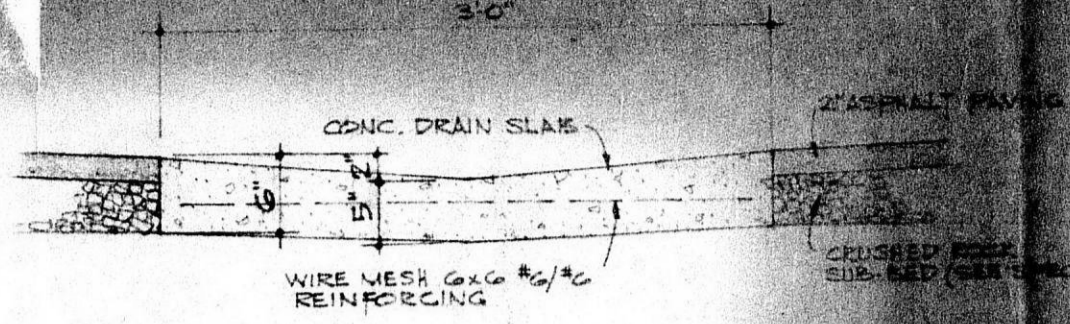

TYPICAL CONC. DRAIN SLAB

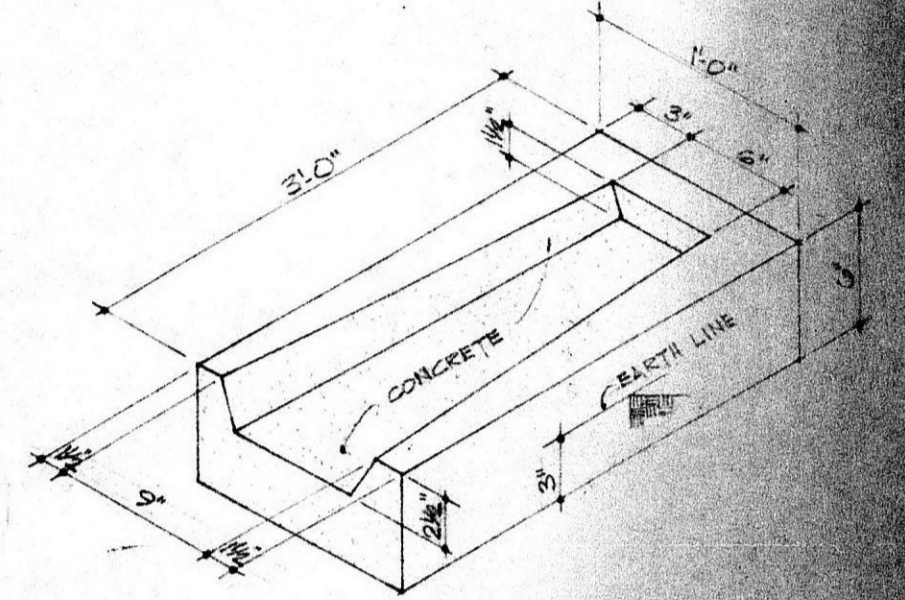


TYPICAL SPLASH BLOCK DETAIL

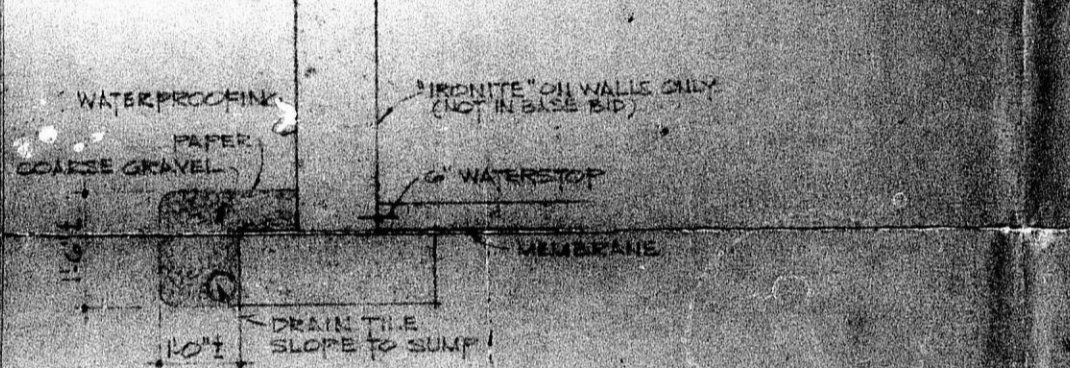

TYPICAL BASEMENT WATERPROOFING AND FOOTING DRAIN

INDEX TO PLANS

SHEET NO.	DESCRIPTION
1	PLOT PLAN
2	SCHEDULES
3	BASEMENT FLOOR PLAN
4	FIRST FLOOR PLAN
5	SECOND FLOOR PLAN
6	EXTERIOR ELEVATIONS & SECTIONS
7	FOUNDATION & FOOTING PLAN
8	FIRST FLOOR FRAMING PLAN
9	SECOND FLOOR FRAMING PLAN
10	ROOF FRAMING PLAN
11	EXTERIOR WALL SECTIONS AND DETAILS
12	SECTIONS & DETAILS
13	INTERIOR ELEVATIONS
14	INTERIOR ELEVATIONS
15	ELECTRICAL BASEMENT FLOOR PLAN
16	ELECTRICAL FIRST FLOOR PLAN
17	ELECTRICAL SECOND FLOOR PLAN
18	PLUMBING BASEMENT & SECOND FLOOR PLANS
19	PLUMBING FIRST FLOOR PLAN
20	MECHANICAL BASEMENT FLOOR PLAN
21	MECHANICAL FIRST FLOOR PLAN
22	MECHANICAL SECOND FLOOR PLAN

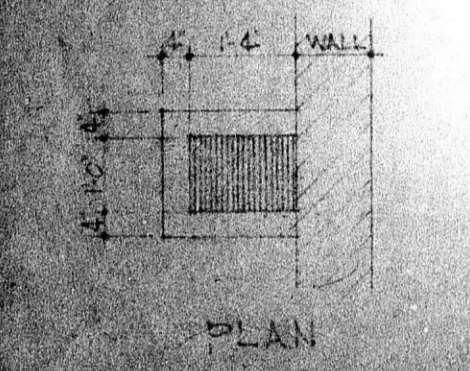

DETAIL - GAS LINE VENTS
1/2" = 1'-0"

TRAFFIC ENGINEERING DIVISION APPROVED
W. B. [Signature]
 Date: 9-14-73

(A) Parking barriers shall be installed at all locations adjacent to public property (so that vehicles will not obstruct public property) and have a minimum length of 6 feet and a minimum cross section of 4" x 4".

(B) Stall lines shall be painted and 4" or greater in width.

(C) Proper ingress and egress signs shall be installed on private property at the entrances and exits of the parking facility.

PLEASANT VALLEY METHODIST CHURCH

27TH STREET AND COOLIDGE STREET WICHITA, KANSAS JAN., 1977

GRIFFITH AND BONHAM ARCHITECTS

SHEET 1 OF 2

FILMED FROM THE BEST AVAILABLE COPY