
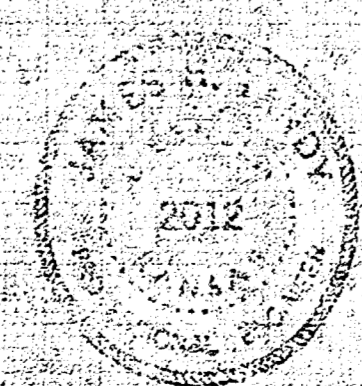


GENERAL NOTES:
 Corrugated pipe is to be 18" dia, 10 ga., riveted, galvanized, & bit. coated. The 15" R.C.P. is to be installed prior to street paving. The 18" C.M.P. will be installed after fill is completed. Fill in drainage easement (7' either side of 6" pipe) is to be compacted to top of pipe elevation.

PRIVATE CONTRACT QUANTITIES
 218'-18" C.M.P. Other inlets & 15" leads are to be constructed by City
 236'-15" R.C.P. incidental to St. paving.
 - Sand Fill & Flushing
 1 - 2x5 Inlet @ (214)


NOTE TO CONTRACTOR
 This project will be constructed under the supervision of the CITY ENGINEER conforming to the SPECIFICATIONS of the CITY OF WICHITA. The CONTRACTOR will reimburse the City of Wichita for all cost of Engineering, Plans, and Inspection.

Plan Scale 1"=20'
 Profile Scale 1"=20' Hor.
 1"=4' Vert.

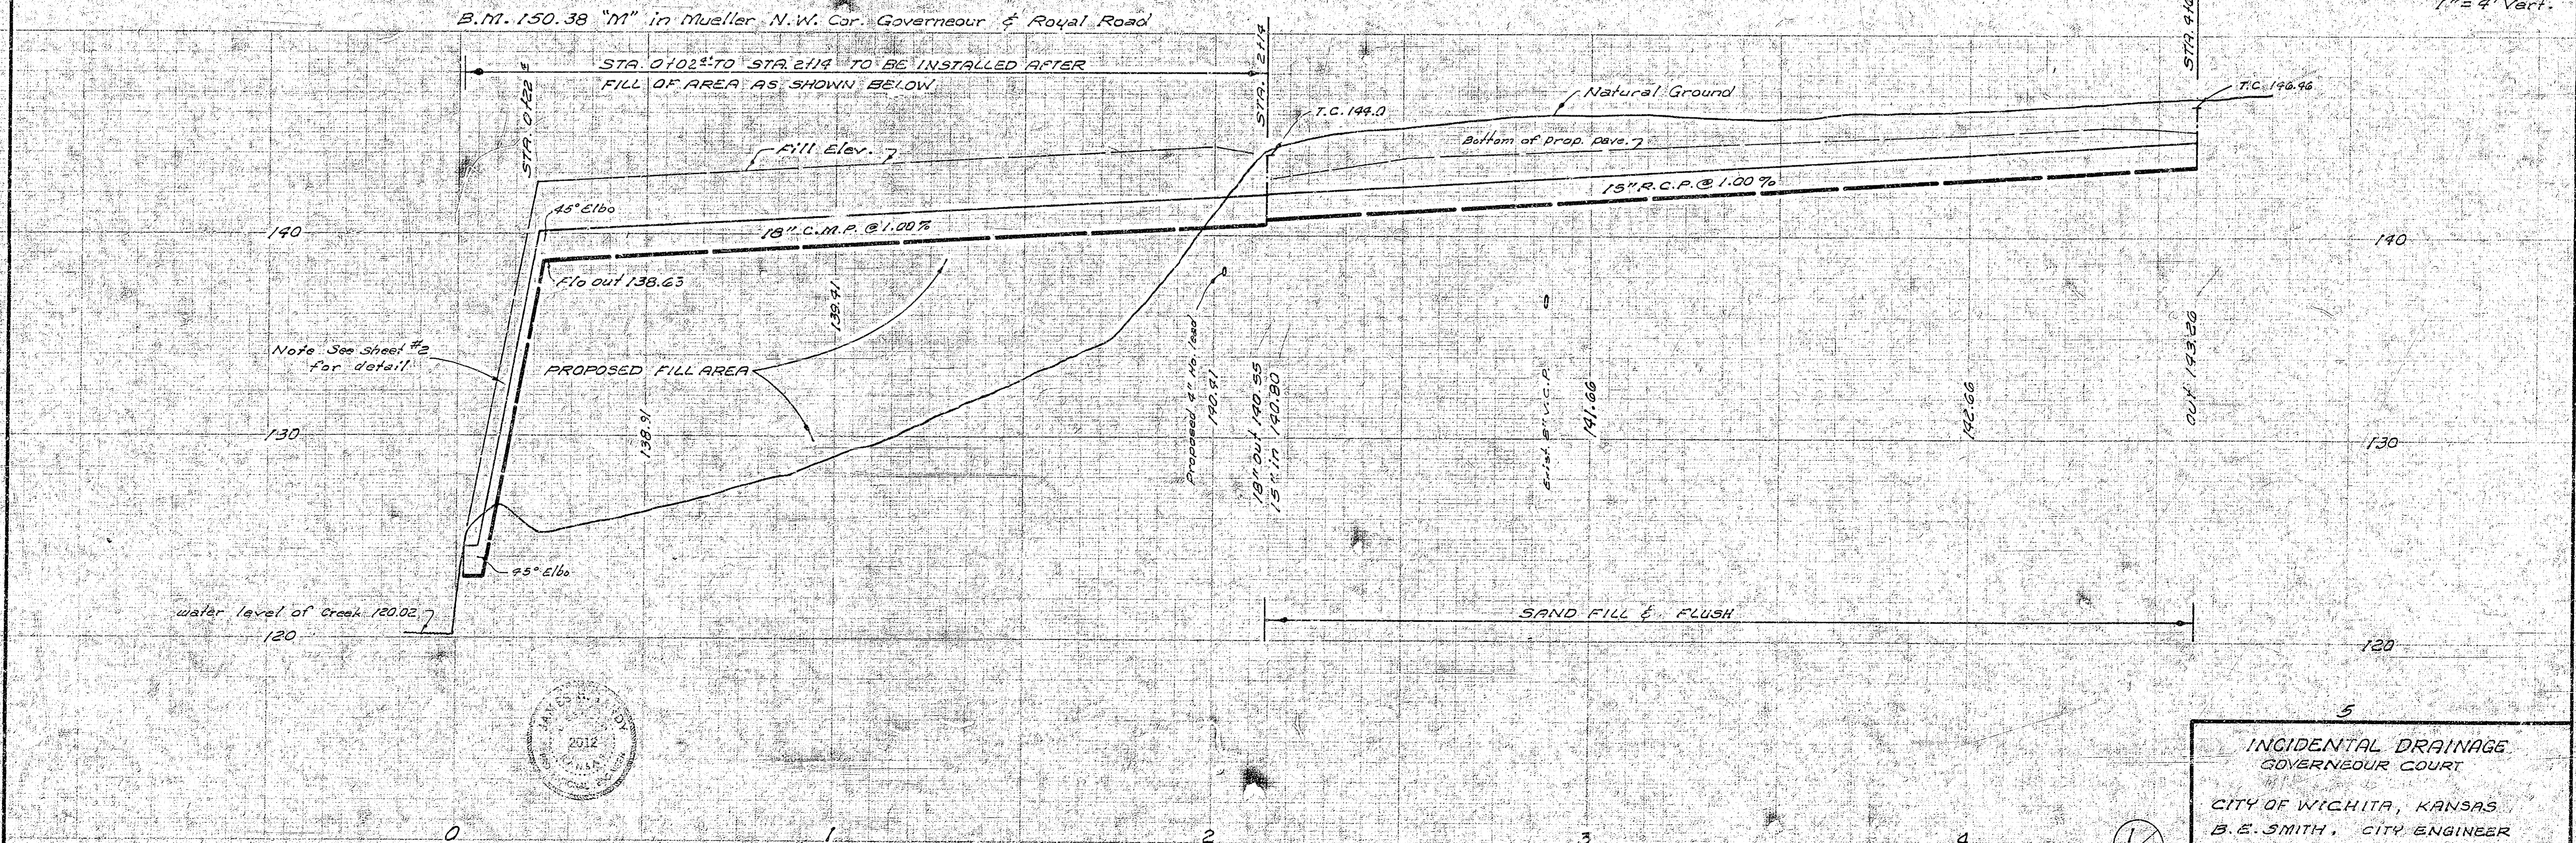

INCIDENTAL DRAINAGE
 GOVERNEUR COURT
 CITY OF WICHITA, KANSAS
 B.E. SMITH, CITY ENGINEER
 PRIVATE PROJECT
 DATE:

1/2

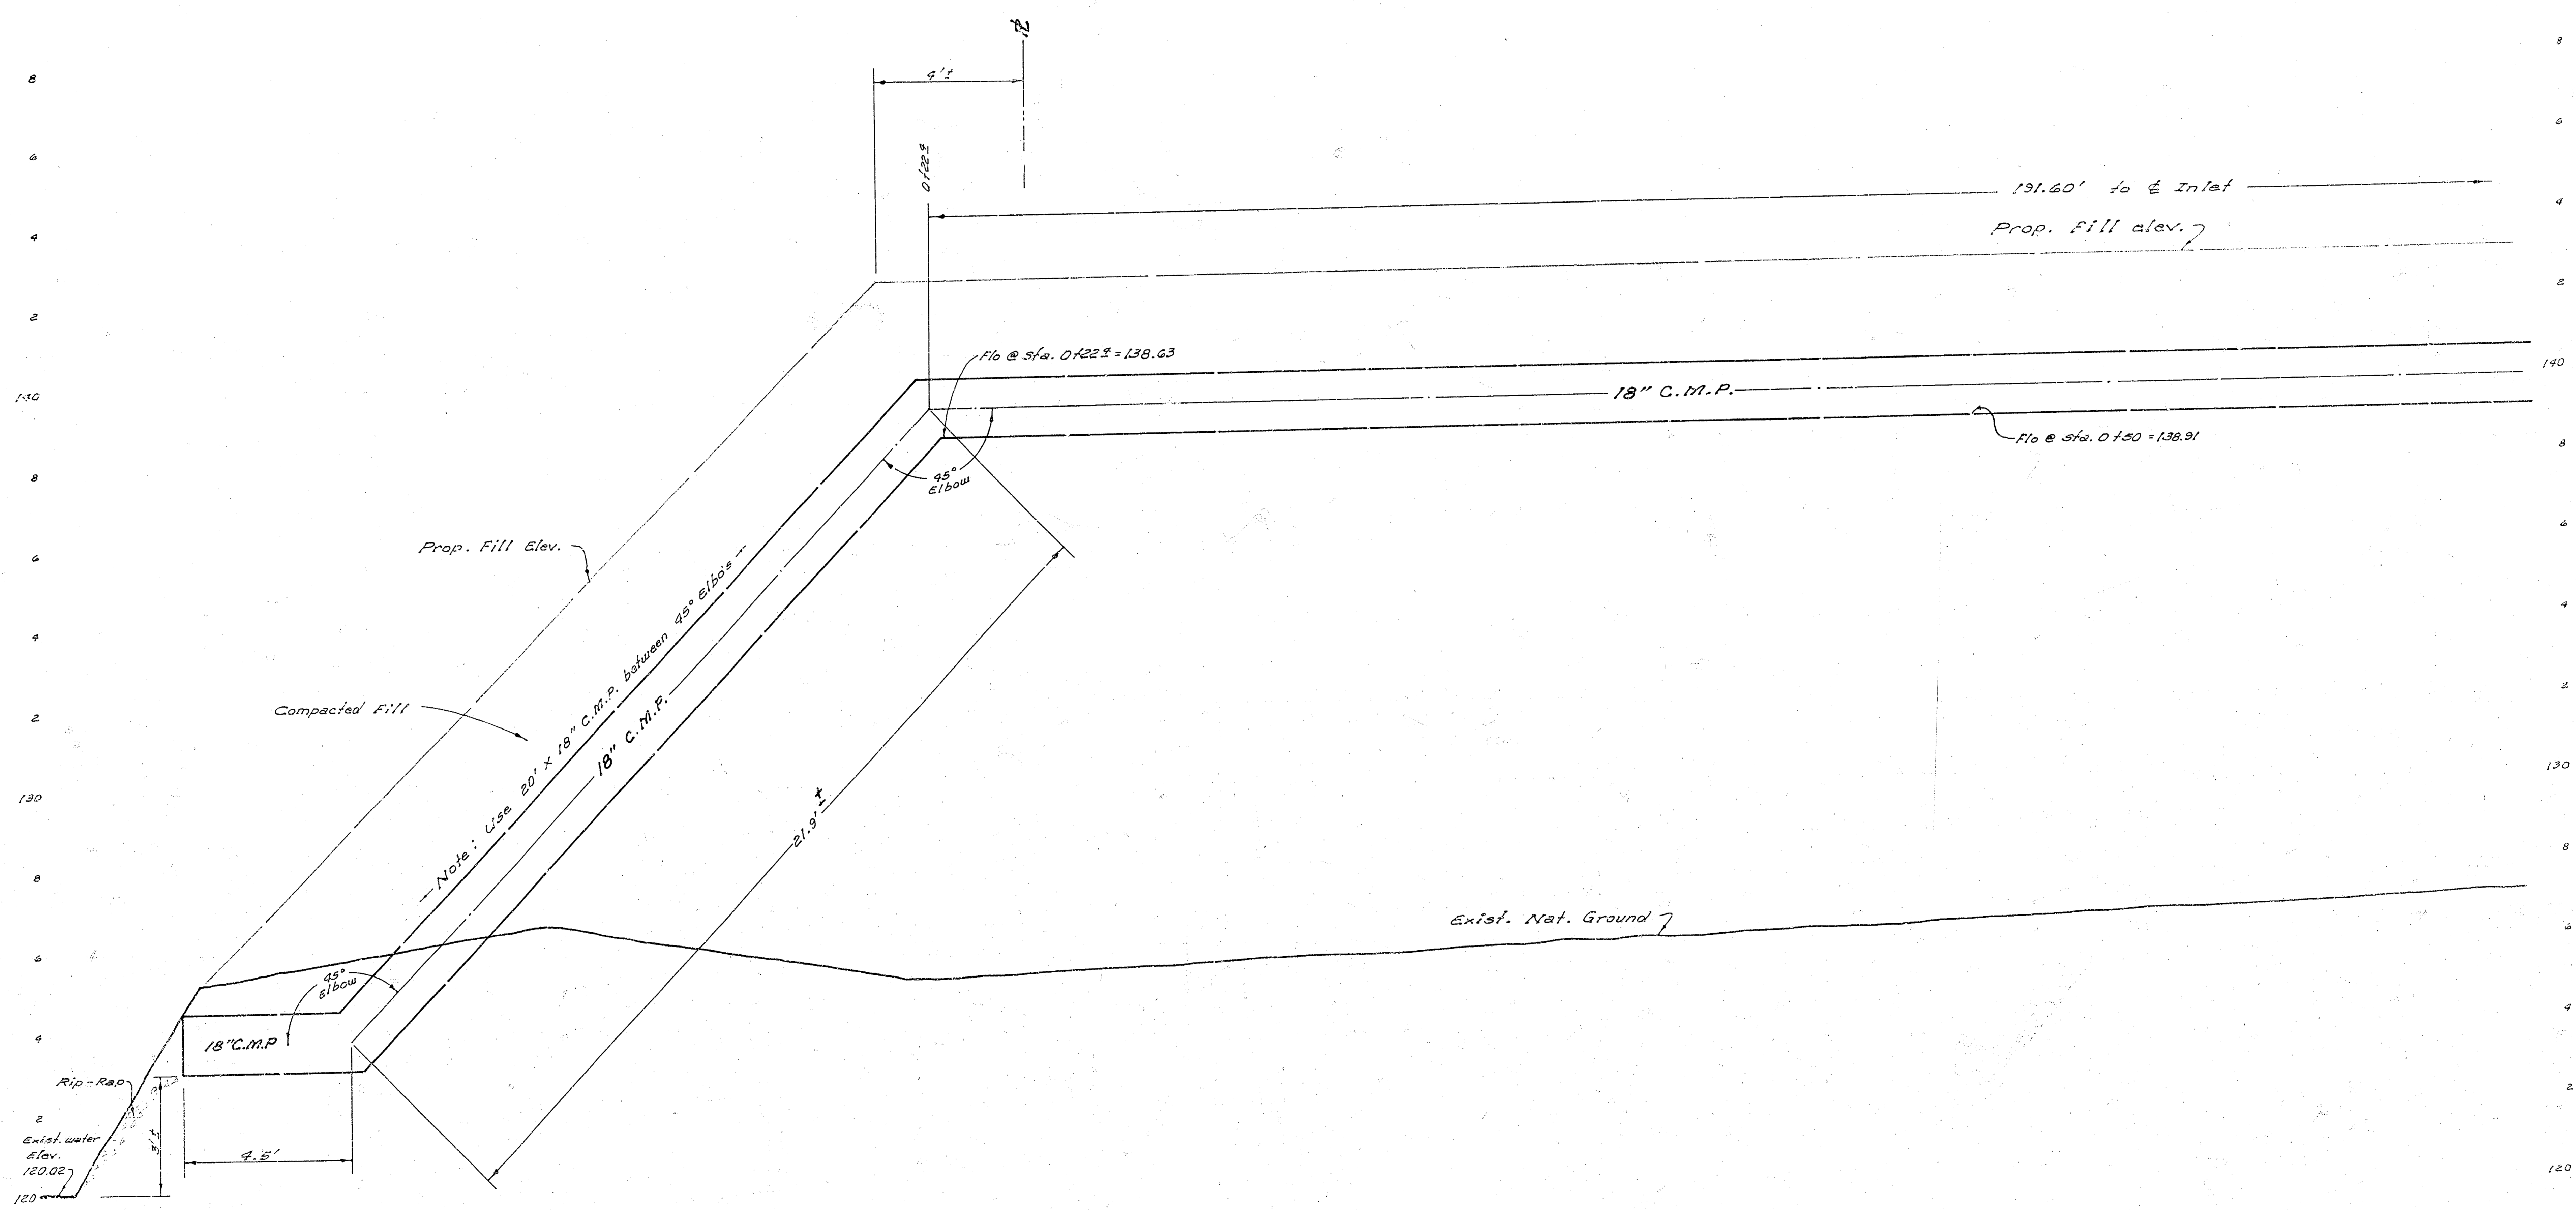

Scale this sheet
 1" = 2' Hor.
 1" = 2' Vert.

INCIDENTAL DRAINAGE
 GOVERNEUR COURT
 PRIVATE PROJECT

2/2

0+00 1+00 2+00 3+00 4+00 5+00 6+00 7+00