


- NOTE:
- THE ANCHOR BOLTS FOR THE SIGNAL POLE SHALL BE TACK WELDED TOGETHER IN A 14" OR 20" DIA. BOLT PATTERN (ON CENTERS AS SHOWN) TO MAINTAIN REQUIRED SELF CONFIGURATION PATTERN AND TO AID IN VERTICAL POSITIONING WHILE CONCRETE BASE IS POURED.
 - USE ANTI-SIZZE COMPOUND ON ALL THREADS.
 - 12" x 3/4" GROUND ROD TO BE POSITIONED BEFORE POURING BASE.
 - CLASS 'A' CONCRETE SHALL BE USED TO CONSTRUCT BASE.
 - CONSTRUCT A 6" THICK x 36" SQUARE CONCRETE CAP AFTER POLE HAS BEEN ERECTED & PLUMBED. CHAMFER EDGE 1". MUST BE APPROVED BY E.A.G. BEFORE POURING.
 - CONDUIT SHALL HAVE PLASTIC (OR METAL) BUSHING (ABOVE BASE) TO PREVENT CABLE CHAFING.
 - USE #8 BARE COPPER GROUND CONDUCTOR FROM CLAMP TO GROUND BOLT IN ACCESS HOLE.

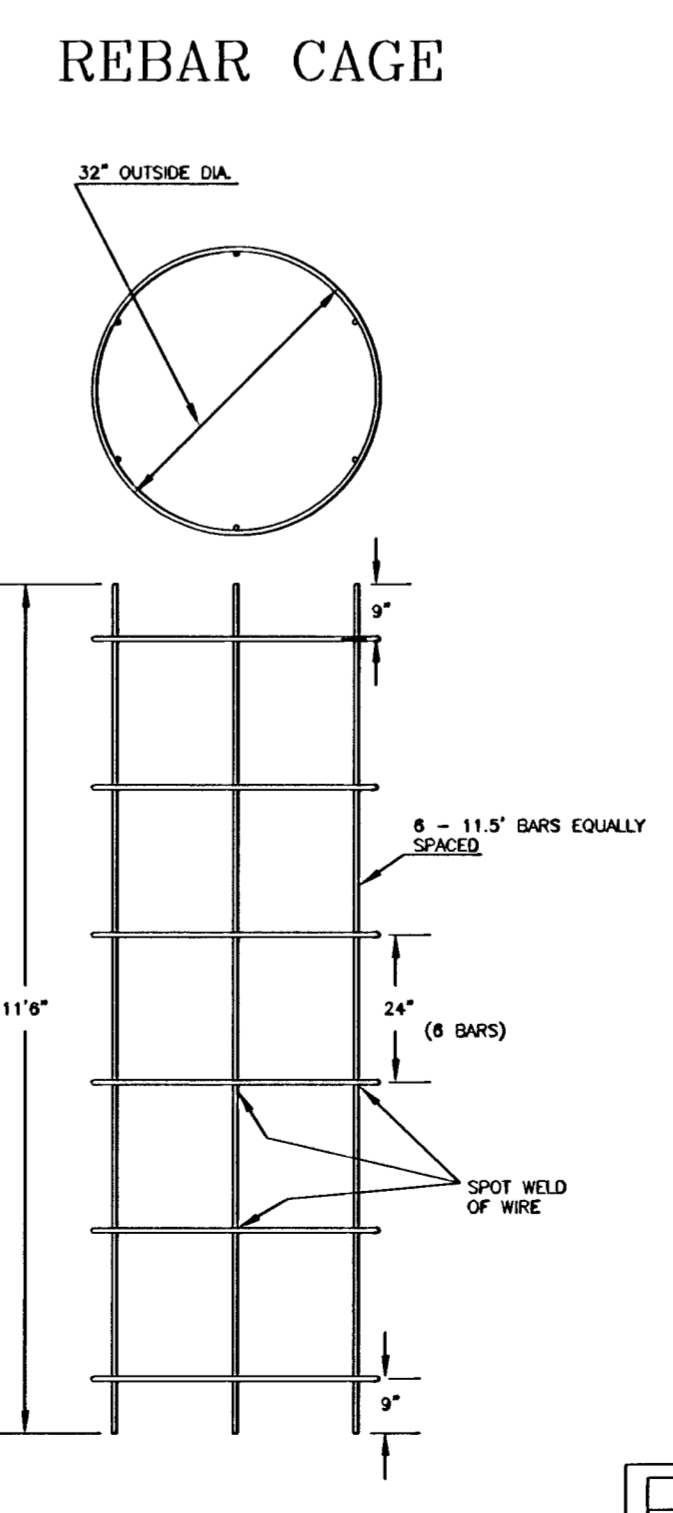

PROJECT DESCRIPTION	
STEEL SIGNAL POLE ASSEMBLY DETAILS	
PROJECT NUMBER 472-82858	
DRAWN BY: T.M.	APPROVED BY
DATE: FEB. 96	DATE: MAY, 97
CITY OF WICHITA DEPARTMENT OF PUBLIC WORKS	
DIVISION OF TRAFFIC ENGINEERING WM. G. MCKINLEY P.E. TRAFFIC ENGINEER	SCALE NO SCALE

E