
B.M. Assumed 100.00' S.W. Cor. Bottom Conc. Step No. #356 Ohio Ave.

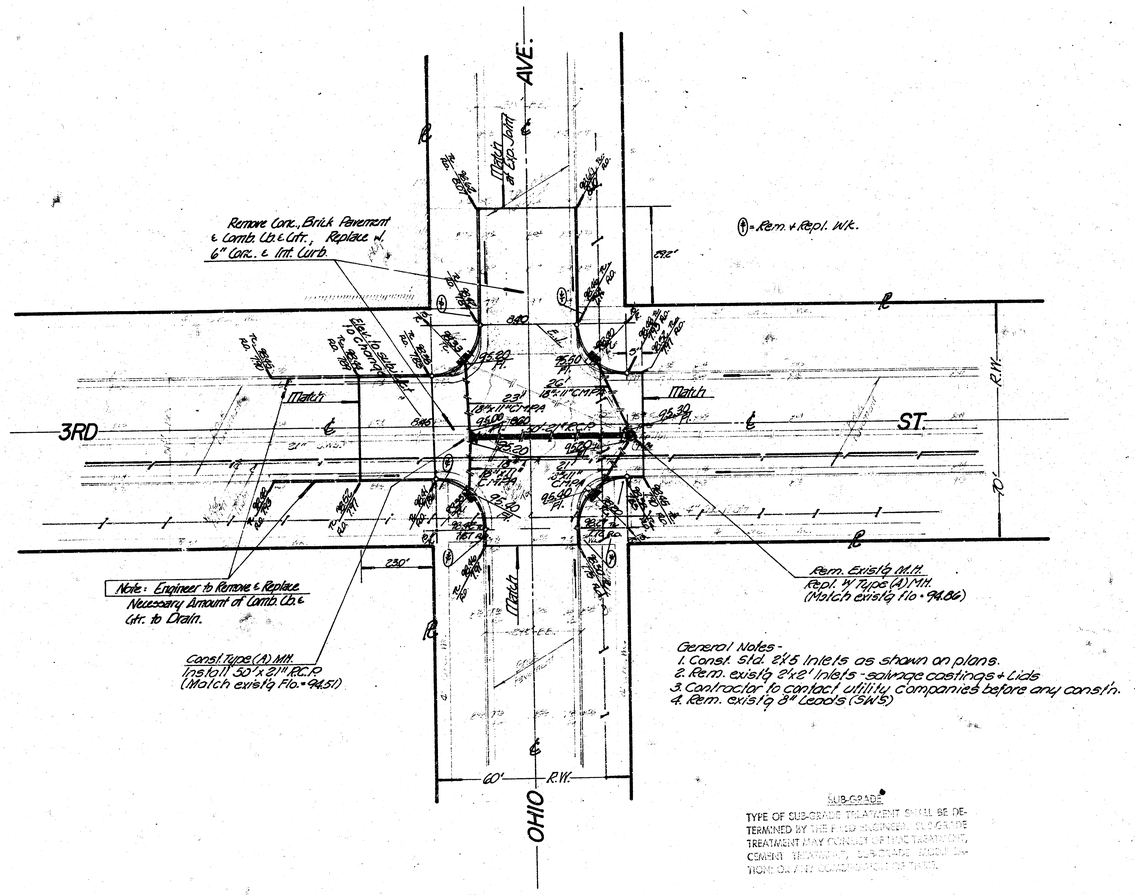

scale: 1" = 20'

General Notes -
1. Const. Std. 2'x5' Inlets as shown on plans.
2. Rem. existg. 2'x2' Inlets - salvage castings & Lids
3. Contractor to contact utility companies before any constn.
4. Rem. existg. 3" Leads (SAVE)

SUB-GRADE
TYPE OF SUB-GRADE TREATMENT SHALL BE DETERMINED BY THE PROJECT ENGINEER. SUB-GRADE TREATMENT MAY CONSIST OF LIME TREATMENT, CEMENT TREATMENT, SUB-GRADE MODIFICATION OR A NO SUB-GRADE TREATMENT.

INTERSECTION RECONSTRUCTION
AT OHIO AVE & 3RD ST.
6" CONC. PAVEMENT w. INT. CURB
CITY of WICHITA, KANSAS
R. W. LINN CITY ENGINEER
PROJECT NO. 24KW 706077
DATE: 1/1

FILMED FROM THE BEST AVAILABLE COPY .....