
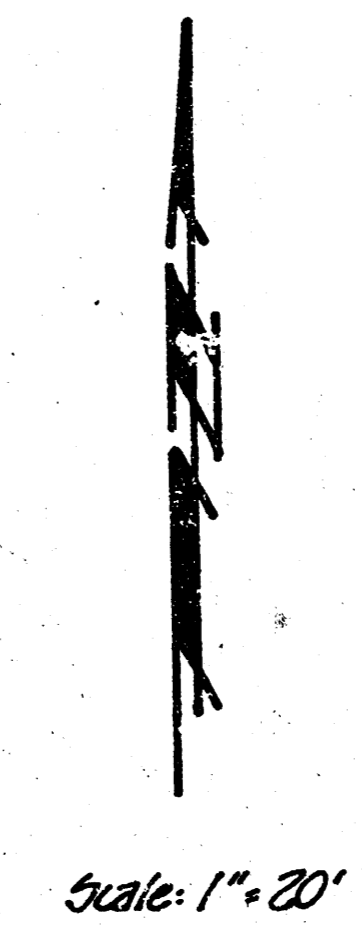


B.M. Assumed 100.00' S.W. Cor. Bottom Conc. Strip No. 356 Ohio Ave.

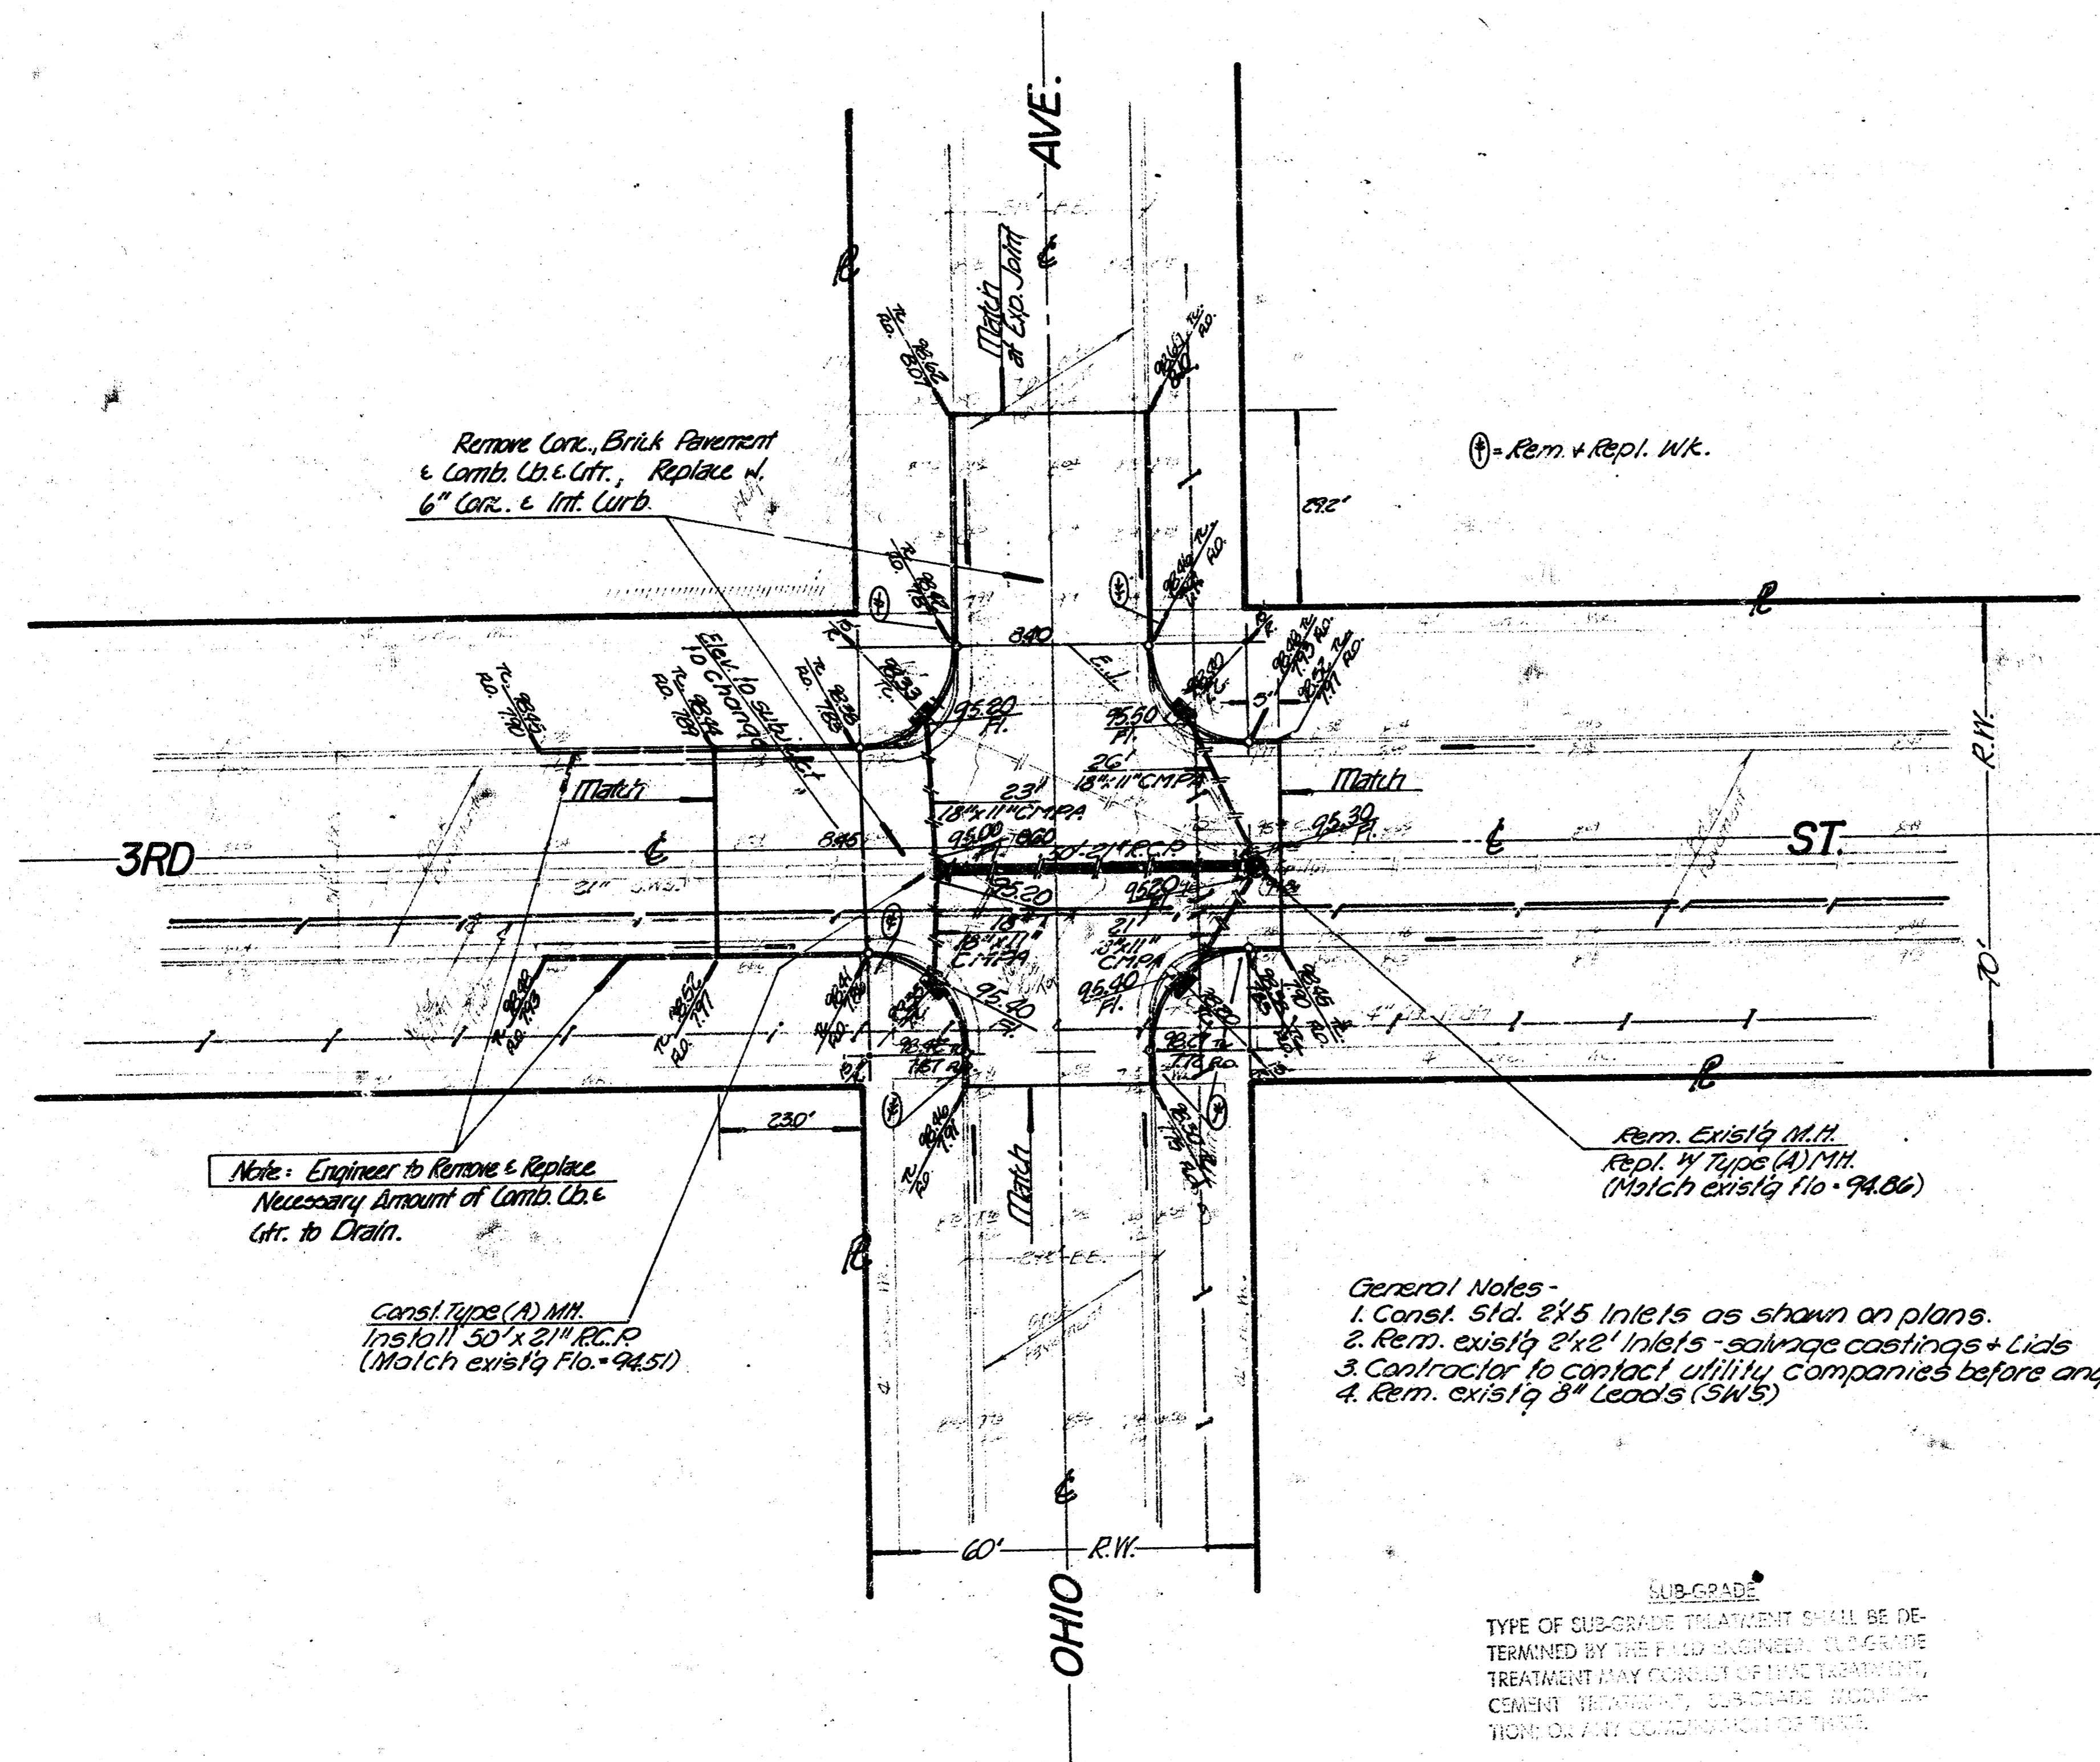

Scale: 1" = 20'

Note: Engineer to Remove & Replace Necessary Amount of Comb. Cts. & Gr. to Drain.

Curb Type (A) M.H. 1/2 x 1/2 x 50" x 2 1/4" R.C.P. (Match existg. Ho. 74.86)

- General Notes -
1. Const. 5' x 5' Inlets as shown on plans.
 2. Rem. existg. 3' x 2' Inlets - salvage castings + Lids
 3. Contractor to contact utility companies before any const'n.
 4. Rem. existg. 8" Leads (SWS)

SUB-GRADE
TYPE OF SUB-GRADE TREATMENT SHALL BE DETERMINED BY THE FIELD ENGINEER. SUB-GRADE TREATMENT MAY CONSIST OF FINE GRADING, CURBSET TREATMENT, SUB-GRADE BENCHING, THICKENING, AND COMBINATION THEREOF.

INTERSECTION RECONSTRUCTION
AT OHIO AVE & 3RD ST.
 6" CONC. PAVEMENT w. INT. CURB
 CITY OF WICHITA, KANSAS
 R. W. LINN CITY ENGINEER
 PROJECT NO. 24KN 106077
 DATE: / /

FILMED FROM THE BEST AVAILABLE COPY