

STA. 0+11 BEGIN PROJECT
INSTALL FLARED END SECTION
10 Lin. ft. of Reinf.
Conc. Encasement.

STA. 2+00 CONST.
STD. M.H. TYPE 79"
STA. 0+00 LINE NO. 2

STA. 2+188 CONST.
STD. M.H. TYPE 79"
END LINE NO. 1

STA. 1+165 CONST.
STD. M.H. TYPE 79"
END LINE NO. 2


STA. 0+00 LINE NO. 2
STA. 2+00 LINE NO. 1

NOTE :
Use extreme caution when laying pipe over
existing 8" San Sewer. See detail below.

B.M. 132.33 60' Spike E. side P.P., S.W. School & Ridge Rd.

GENERAL NOTES
Flush all backfill. Cost of flushing
is to be included in bid price of pipe. If
excavated material is unsuitable for
backfill, sand fill will be used.
Use 54" dia. flange on M.H. ring castings.
Flared end section to be incidental to bid
price of pipe.

Plan Scale 1"=20'
Profile Scale 1"=20' Hor.
1"=4' Vert.

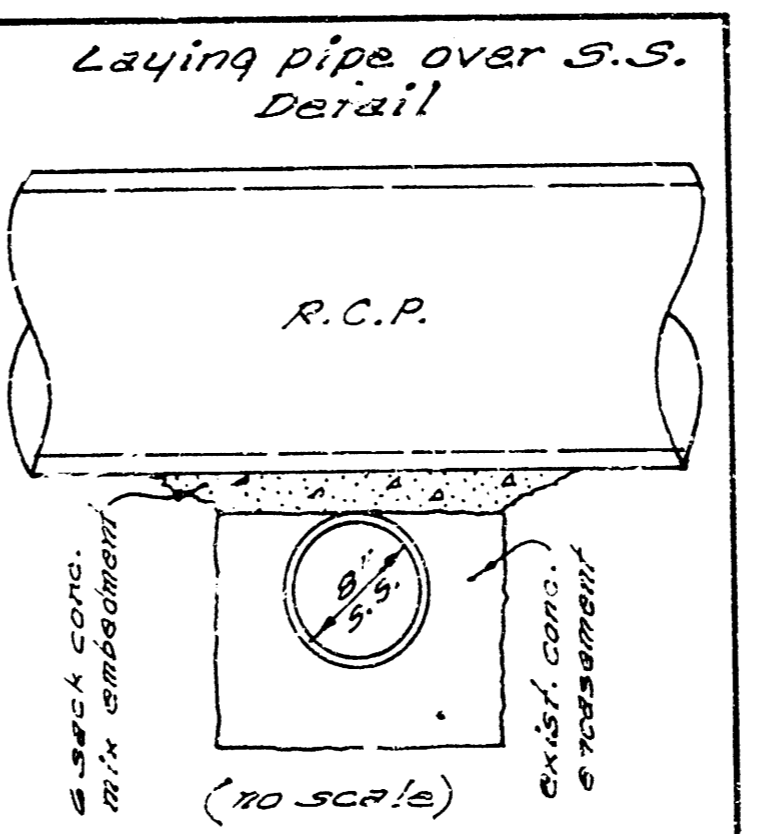

STORM WATER SEWER NO. 86
CITY OF WICHITA, KANSAS
B.E. SMITH, CITY ENGINEER
PROJECT NO. CEB-75
DATE: SEPT. 1968