


BASED ON 1975 PROPERTY MAP

Note
Use extreme **CAUTION** when working over H.G.F.E. & Bell Conduits.

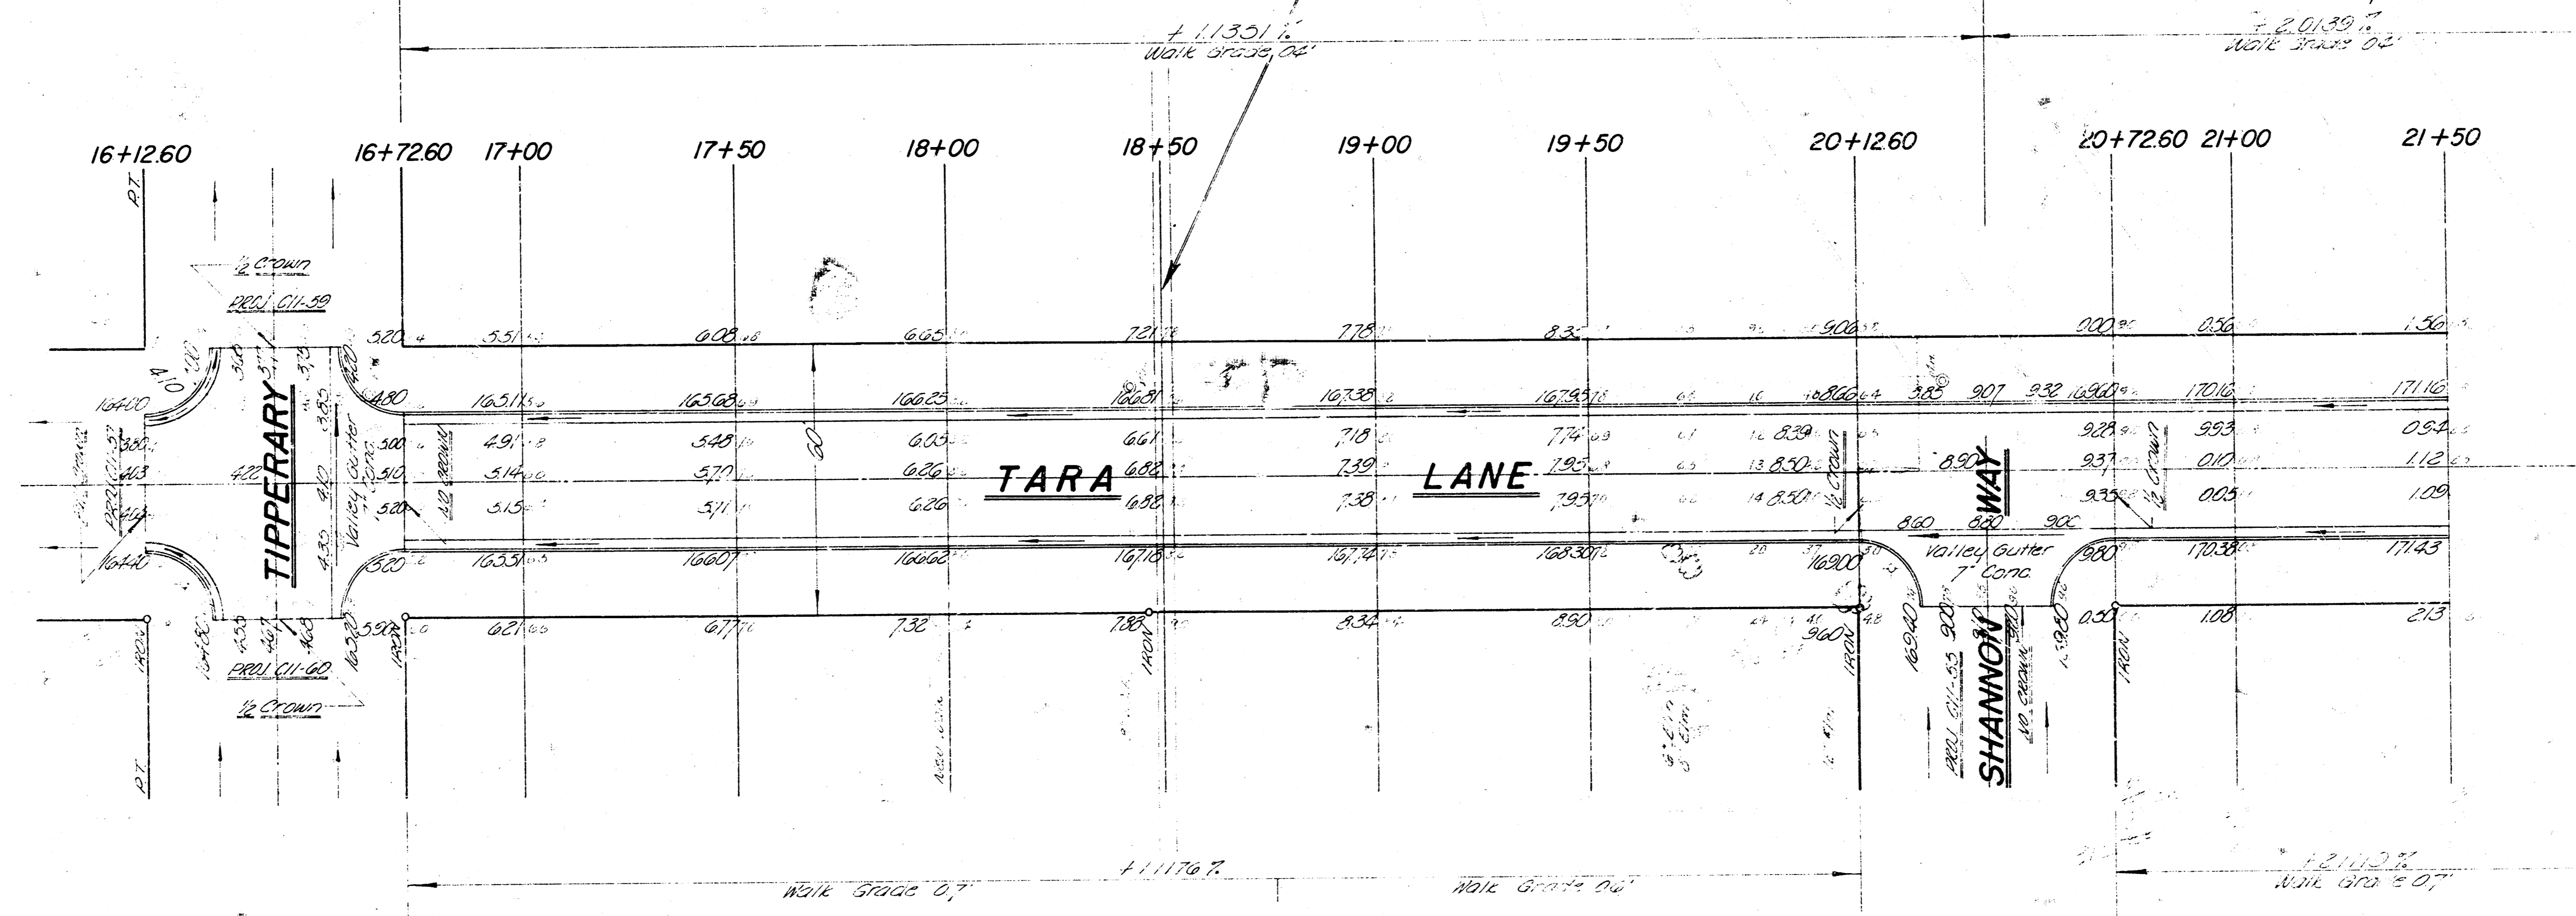


EXCAVATION		COMP. FILL	
Station	Quantity	Station	Quantity
1719.9	136.7	327.5	15.4
1720	15.7	32.8	1.5
1891.9	172.4	360.3	16.9

TARA LANE
S.L. TIPPERARY TO W.L. LOT 5
26'-2'-30' A.C.
CITY OF WICHITA, KANSAS
B.E. SMITH CITY ENGINEER
DATE: APRIL 1962 PROJ. C11-58

4

PLAN OF E. SIDEWAY

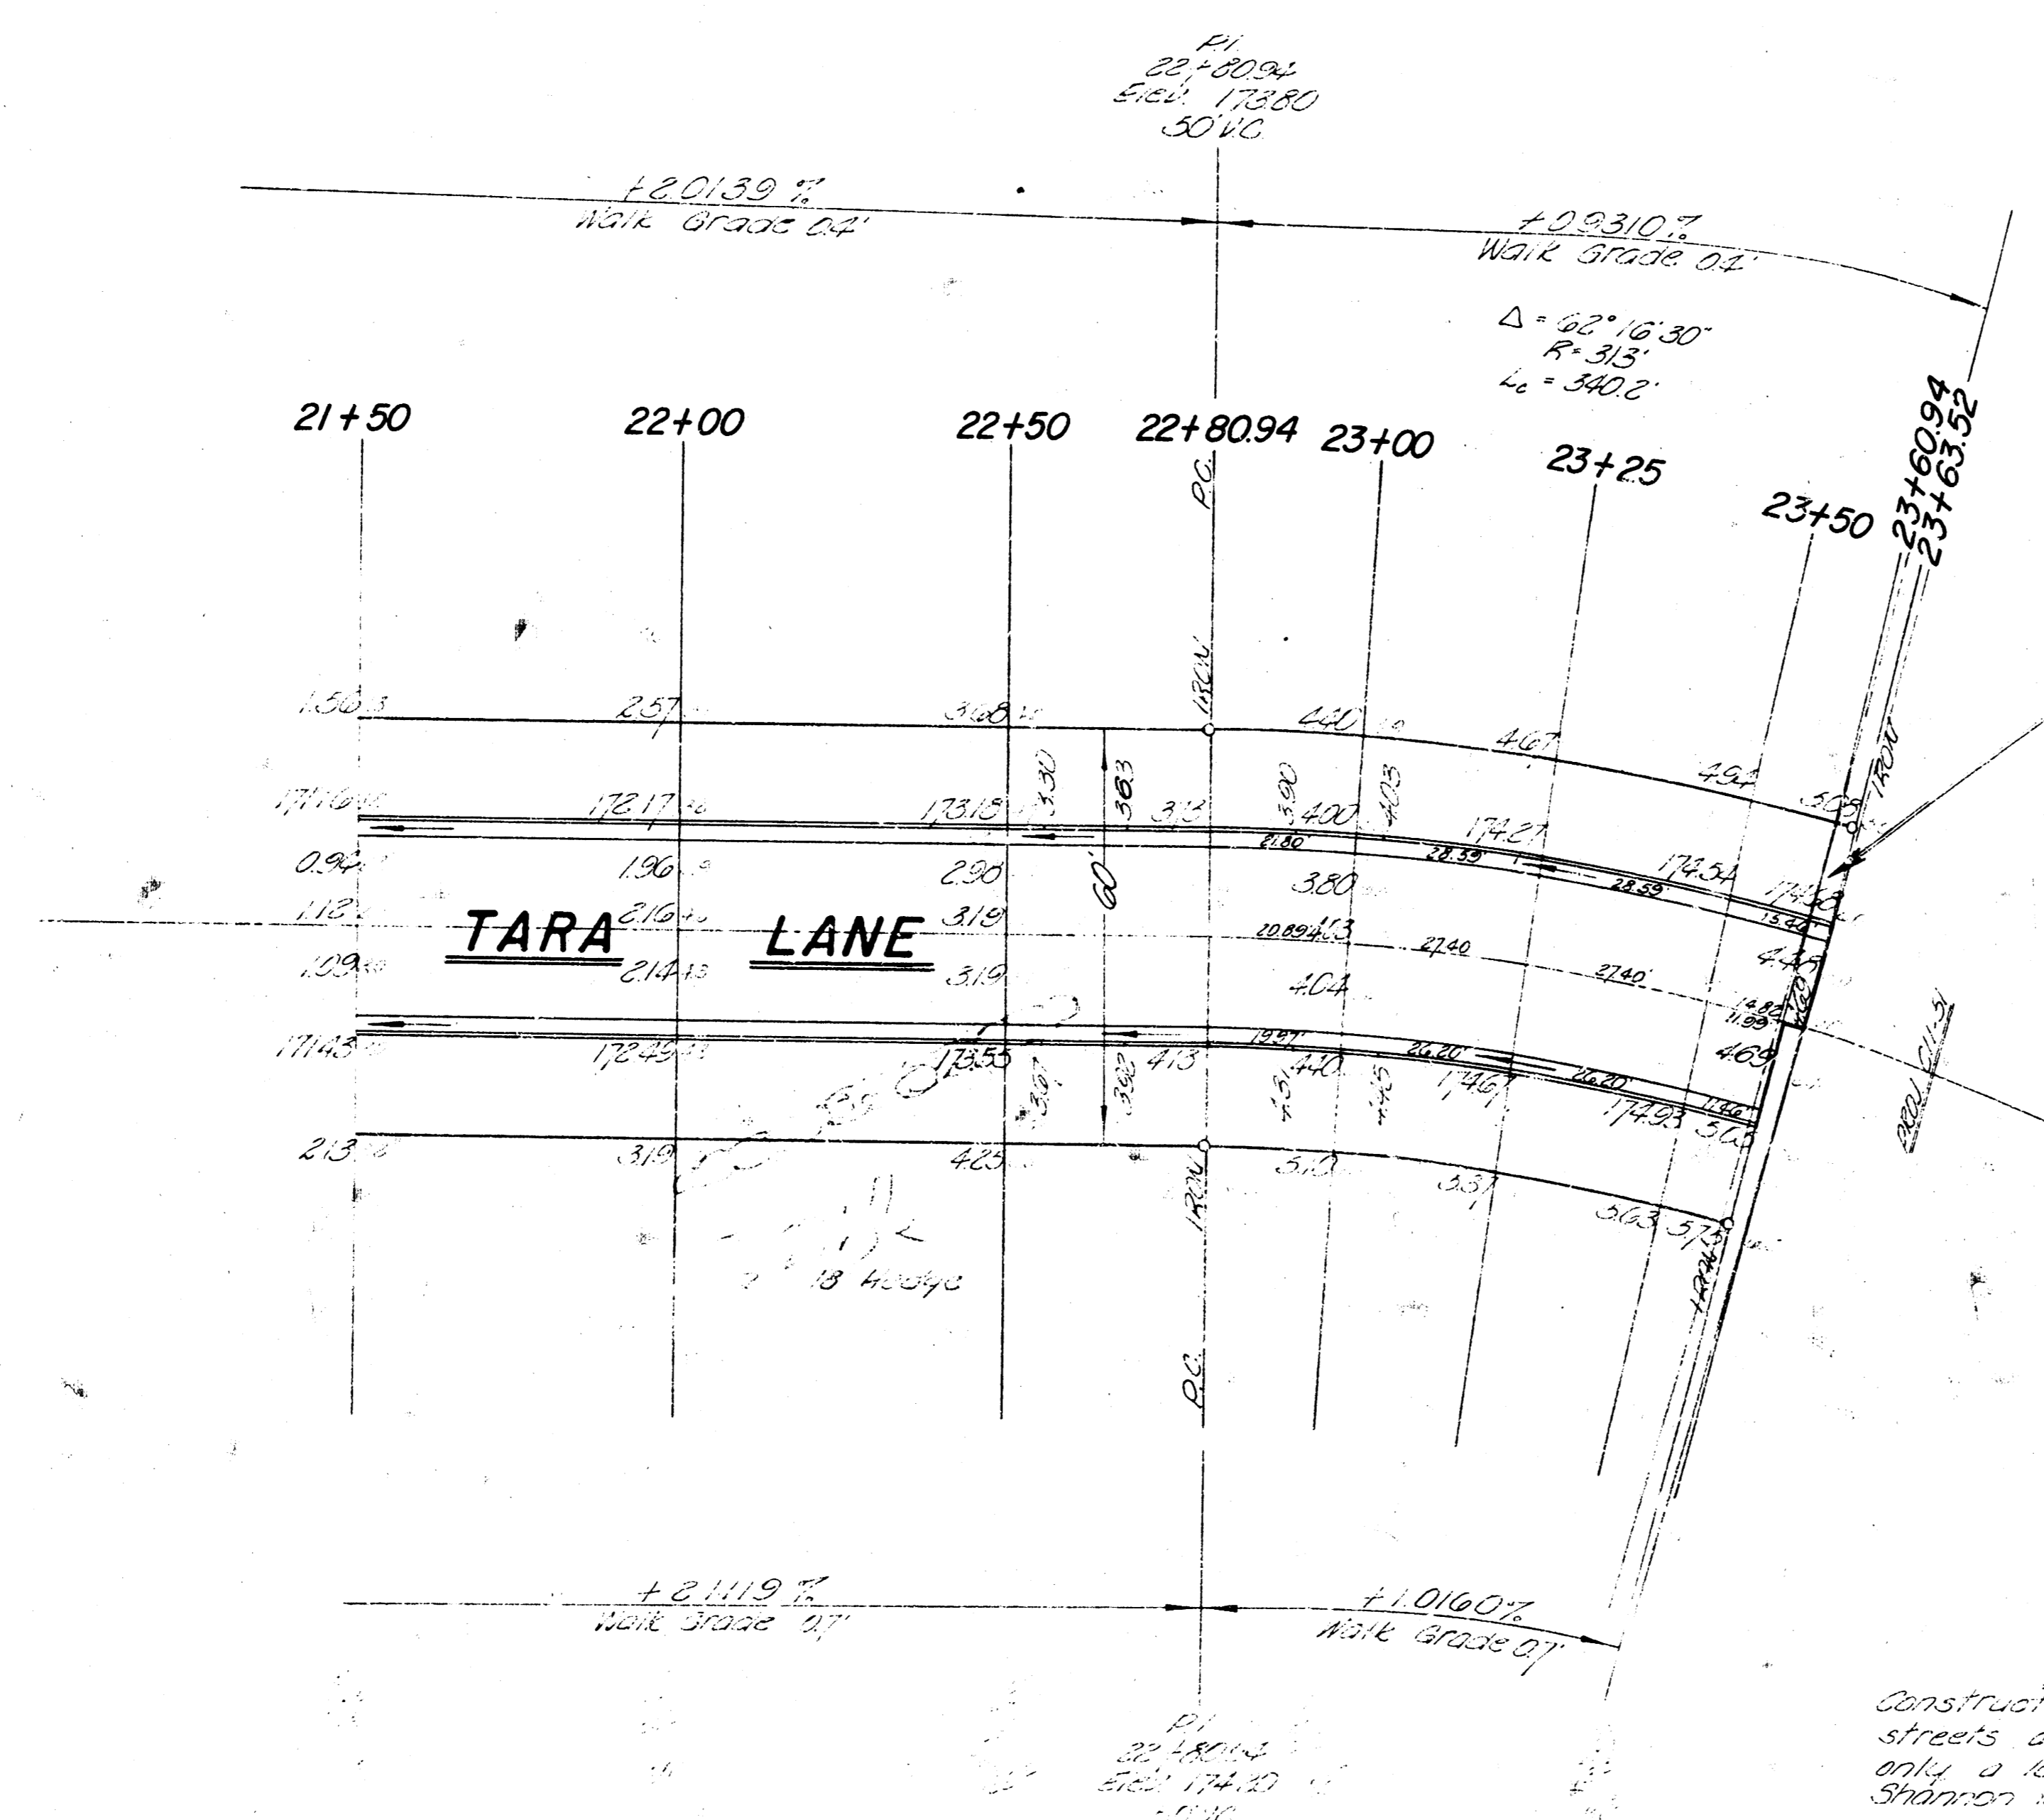

Note
Use extreme **CAUTION** when working over K&E & Bell Conduits

CURVE DATA

Radius & S. C. = 313' 3462'16.90'
Length = 540.00' 100 per ft = 540.00'

Sta	ARC	Chord	Defl	± Defl
23+00.00	190.8	190.8	19.28	1° 04' 40.0"
23+25.00	250.0	248.9	25.55	2° 01' 57.6"
23+50.00	-	-	-	6° 19' 15.0"
23+75.00	-	-	-	9° 36' 38.4"
24+00.00	-	-	-	12° 53' 48.0"
24+25.00	-	-	-	16° 11' 07.2"
24+50.00	-	-	-	19° 28' 26.4"
24+75.00	-	-	-	22° 45' 45.6"
25+00.00	-	-	-	26° 02' 55.2"
25+25.00	-	-	-	29° 20' 14.8"
25+50.00	-	-	-	32° 37' 34.4"
25+75.00	-	-	-	35° 54' 54.0"
26+00.00	23.00	22.89	2.52	2° 17' 17.6"
26+25.00	21.14	21.14	21.61	3° 36' 03.6"

INTERSECTION NOTE:
Construct intersections as shown unless cross streets are being paved at same time. Use only a 10' valley gutter section (T-Cone), if Shannon is paved at same time as this project.

5

TARA LANE
S.L. TIPPERARY TO W.L. 5
PROJ. CII-58