


3RD STREET
E.L. WICHITA STREET TO W.L. MAIN STREET
PROJECT No. WNKB501430

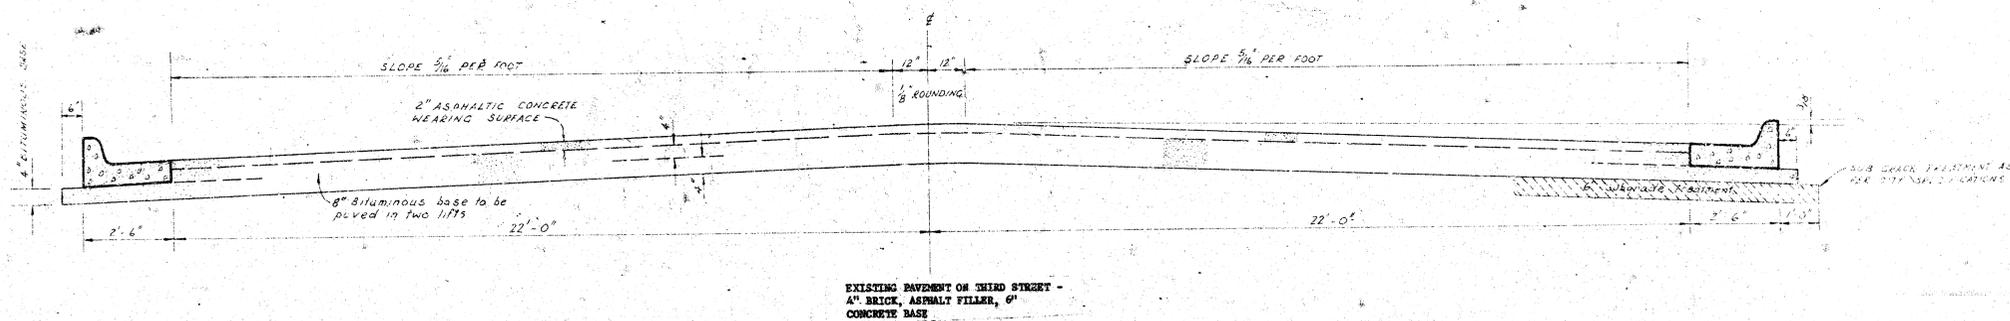


TYPICAL SECTION

48' ASPHALTIC CONCRETE PAVEMENT WITH BITUMINOUS BASE

A TACK COAT OF EMULSIFIED ASPHALT SS 1H SHALL BE APPLIED AT AN APPROXIMATE RATE 0.05 GALLONS PER SQ. YD. BETWEEN LIFTS OF ASPHALTIC MATERIALS WHEN ORDERED BY THE ENGINEER. TACK COAT WILL NOT BE PAID FOR DIRECTLY AND SHALL BE CONSIDERED AS SUBSIDIARY TO PRICE BID FOR ASPHALTIC PAVEMENT. BITUMINOUS BASE AND ASPHALTIC CONCRETE WEARING SURFACE SHALL BE PLACED WITH A LAYDOWN MACHINE HAVING AUTOMATIC ELECTRONIC CONTROLS FOR CROWN AND GRADE. CONSTRUCTION JOINTS IN EACH LIFT SHALL BE STAGGERED A MINIMUM DISTANCE OF 1' WITH JOINTS IN PRECEDING LIFTS AND SUCH THAT A JOINT WILL BE CONSTRUCTED ON THE PAVEMENT CENTERLINE IN THE TOP LIFT.


DETAIL OF TRANSVERSE CONSTRUCTION JOINTS.




TRANSVERSE CONSTRUCTION JOINTS SHALL BE CONSTRUCTED IN FLEXIBLE BASE PAVEMENTS AT LOCATIONS WHERE PAVEMENT TEMPORARILY ENDS TO FACILITATE FUTURE PAVEMENT CONSTRUCTION AS SHOWN BY DETAIL. THE COST OF CONSTRUCTING THE TRANSVERSE CONSTRUCTION JOINTS SHALL NOT BE MEASURED OR PAID FOR DIRECTLY BUT SHALL BE INCLUDED IN THE BID PRICE FOR SQUARE YARDS OF ASPHALTIC CONCRETE PAVEMENT.

The A.C. pavement between the comb. curb & gutter be paid as sq yds 10" A.C. pavement (8" Bituminous Ba. The Bituminous Base under the comb curb & gutter sh be paid as sq yds. 4" Bituminous Base.

COMBINED CURB & GUTTER

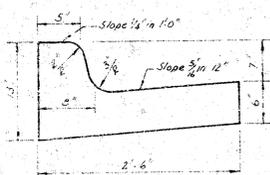

ROLL TYPE CURB & GUTTER

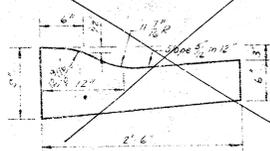

CITY OF WICHITA, K

DEPARTMENT of PUBLIC WORKS

Division

R. W. LINN. CITY EA


DATE Proj No. W1

1
4

1/3

Survey - 1900
Plan - 21011
Exc - checked

B.M. 114.01 N.E. Corner Concrete Base R.R. Signal S.W.
Corner 3RD and WICHITA.
B.M. 112.71 "a" Cut on back of walk on the No. Line
of Third Street 4' 5" E. of E. Line of Main Street.

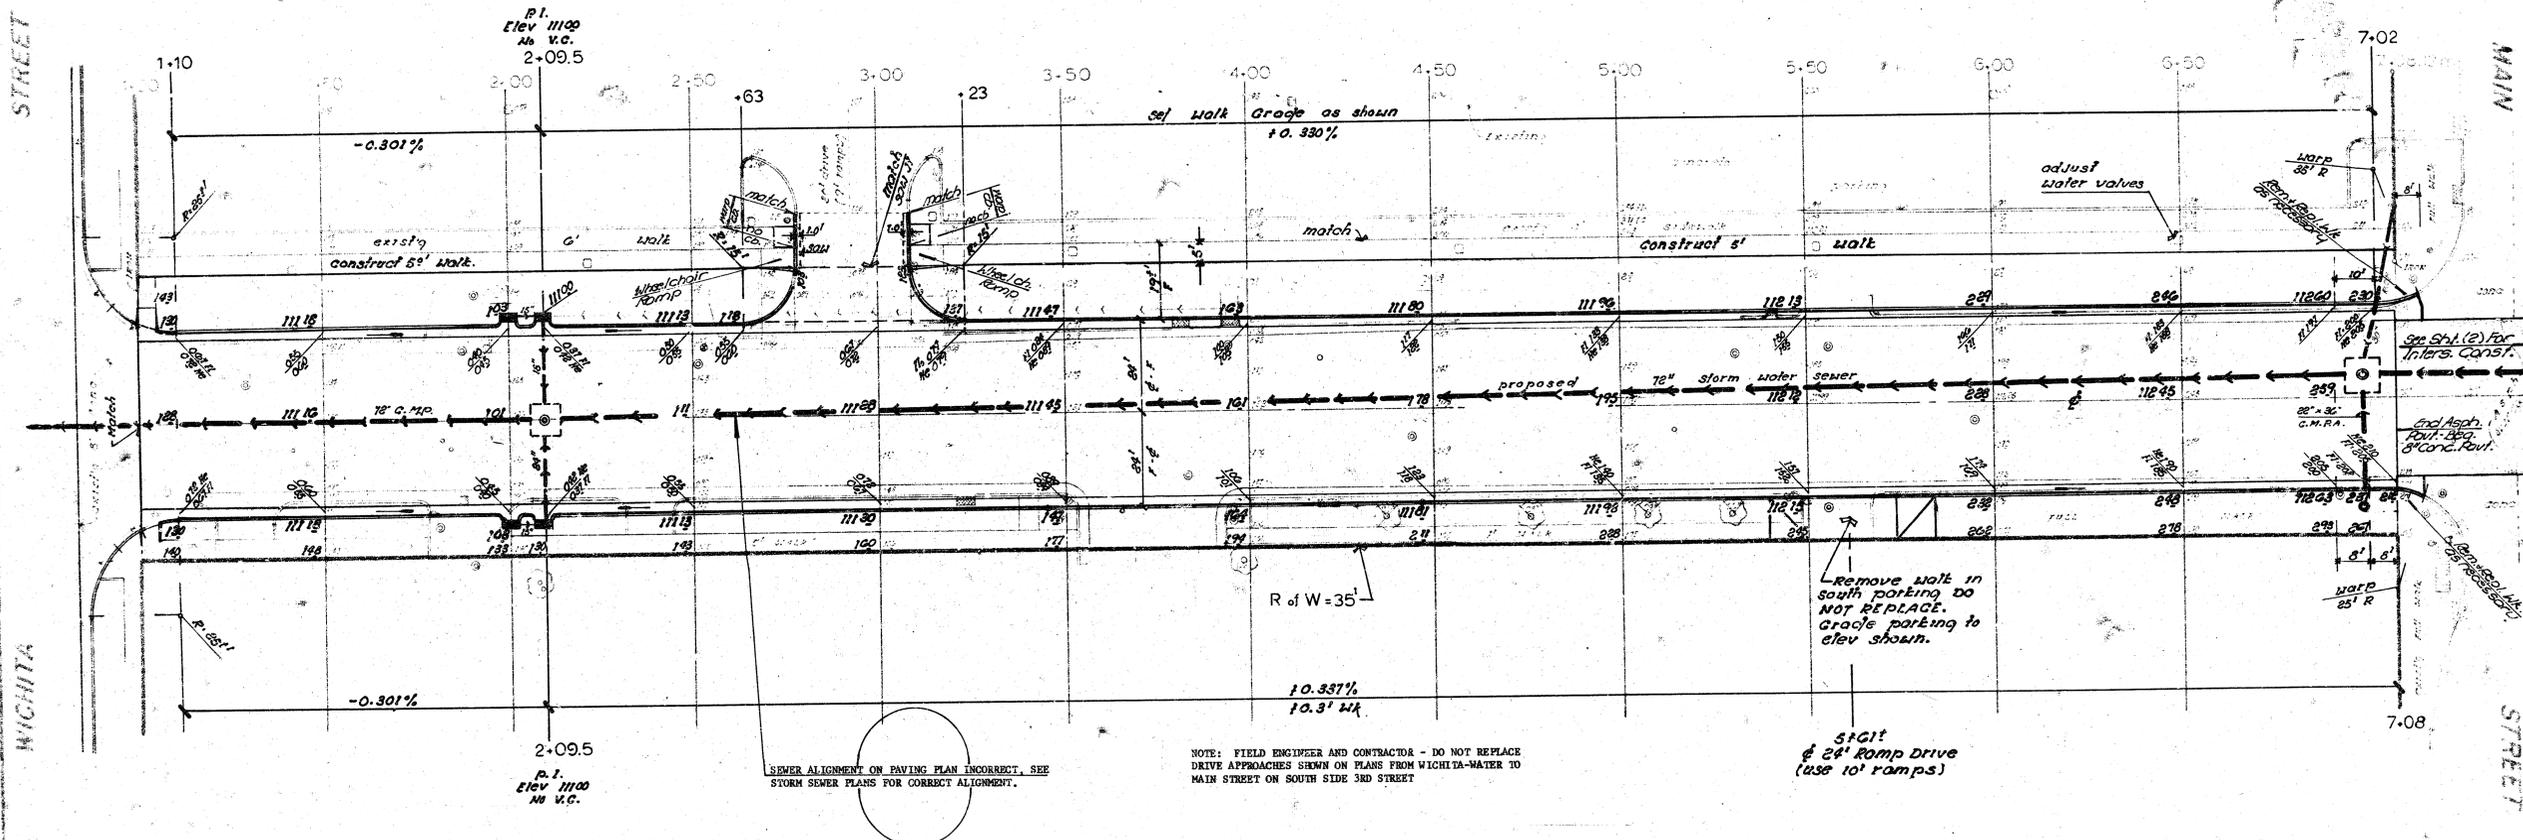

NOTE: FIELD ENGINEER AND CONTRACTOR - DO NOT REPLACE DRIVE APPROACHES SHOWN ON PLANS FROM WICHITA-WATER TO MAIN STREET ON SOUTH SIDE 3RD STREET

5+61' & 24' Ramp Drive (use 10' ramps)

NOTE TO CONTRACTOR: ALL USEABLE EXCAVATED MATERIAL TO REMAIN ON PROJECT.

"EARTHWORK"	
excavation	comp fill
250.1 cu yds	38.2 cu yds
110% 25.0	+10% 3.8
275.1 cu yds	42.0 cu yds

3RD STREET
E.L. WICHITA STR. TO W.L. MAIN
CITY OF WICHITA, KAN.
(4" B-B) 2" asph conc wearing sur
8" bituminous base w/ comb cb
R W LINN CITY ENGINE
Date: _____ Proj No. WNKB5014:
2/3

"WHEEL CHAIR RAMP"
The construction of wheel chair ramps at intersections is to be bid as 3rd Wheelchair Ramp.

CAUTION
UNDERGROUND UTILITIES
Please check for gas, water, electric, and other utilities before excavating.

SUB-GRADE
TYPE OF SUB-GRADE TREATMENT SHALL BE DETERMINED BY THE FIELD ENGINEER. SUB-GRADE TREATMENT MAY CONSIST OF LIME TREATMENT, CEMENT TREATMENT, SUB-GRADE MODIFICATION, OR ANY COMBINATION OF THESE.


NOTE TO FIELD ENGINEER & CONTRACTOR
Grade parking and clear right-of-way for proposed sidewalk. Compact fill in sidewalk area. TO BE CONSTRUCTED BY "OTHERS".

NOTE: trees to be removed marked thus
Except that any tree marked for removal which in the opinion of the engineer can be saved, shall be spared.



FILMED FROM THE BEST AVAILABLE COPY

S.M. 11497 N.E. Corner Concrete Base R.R. Signal S.W.
corner 3RD and WICHITA.

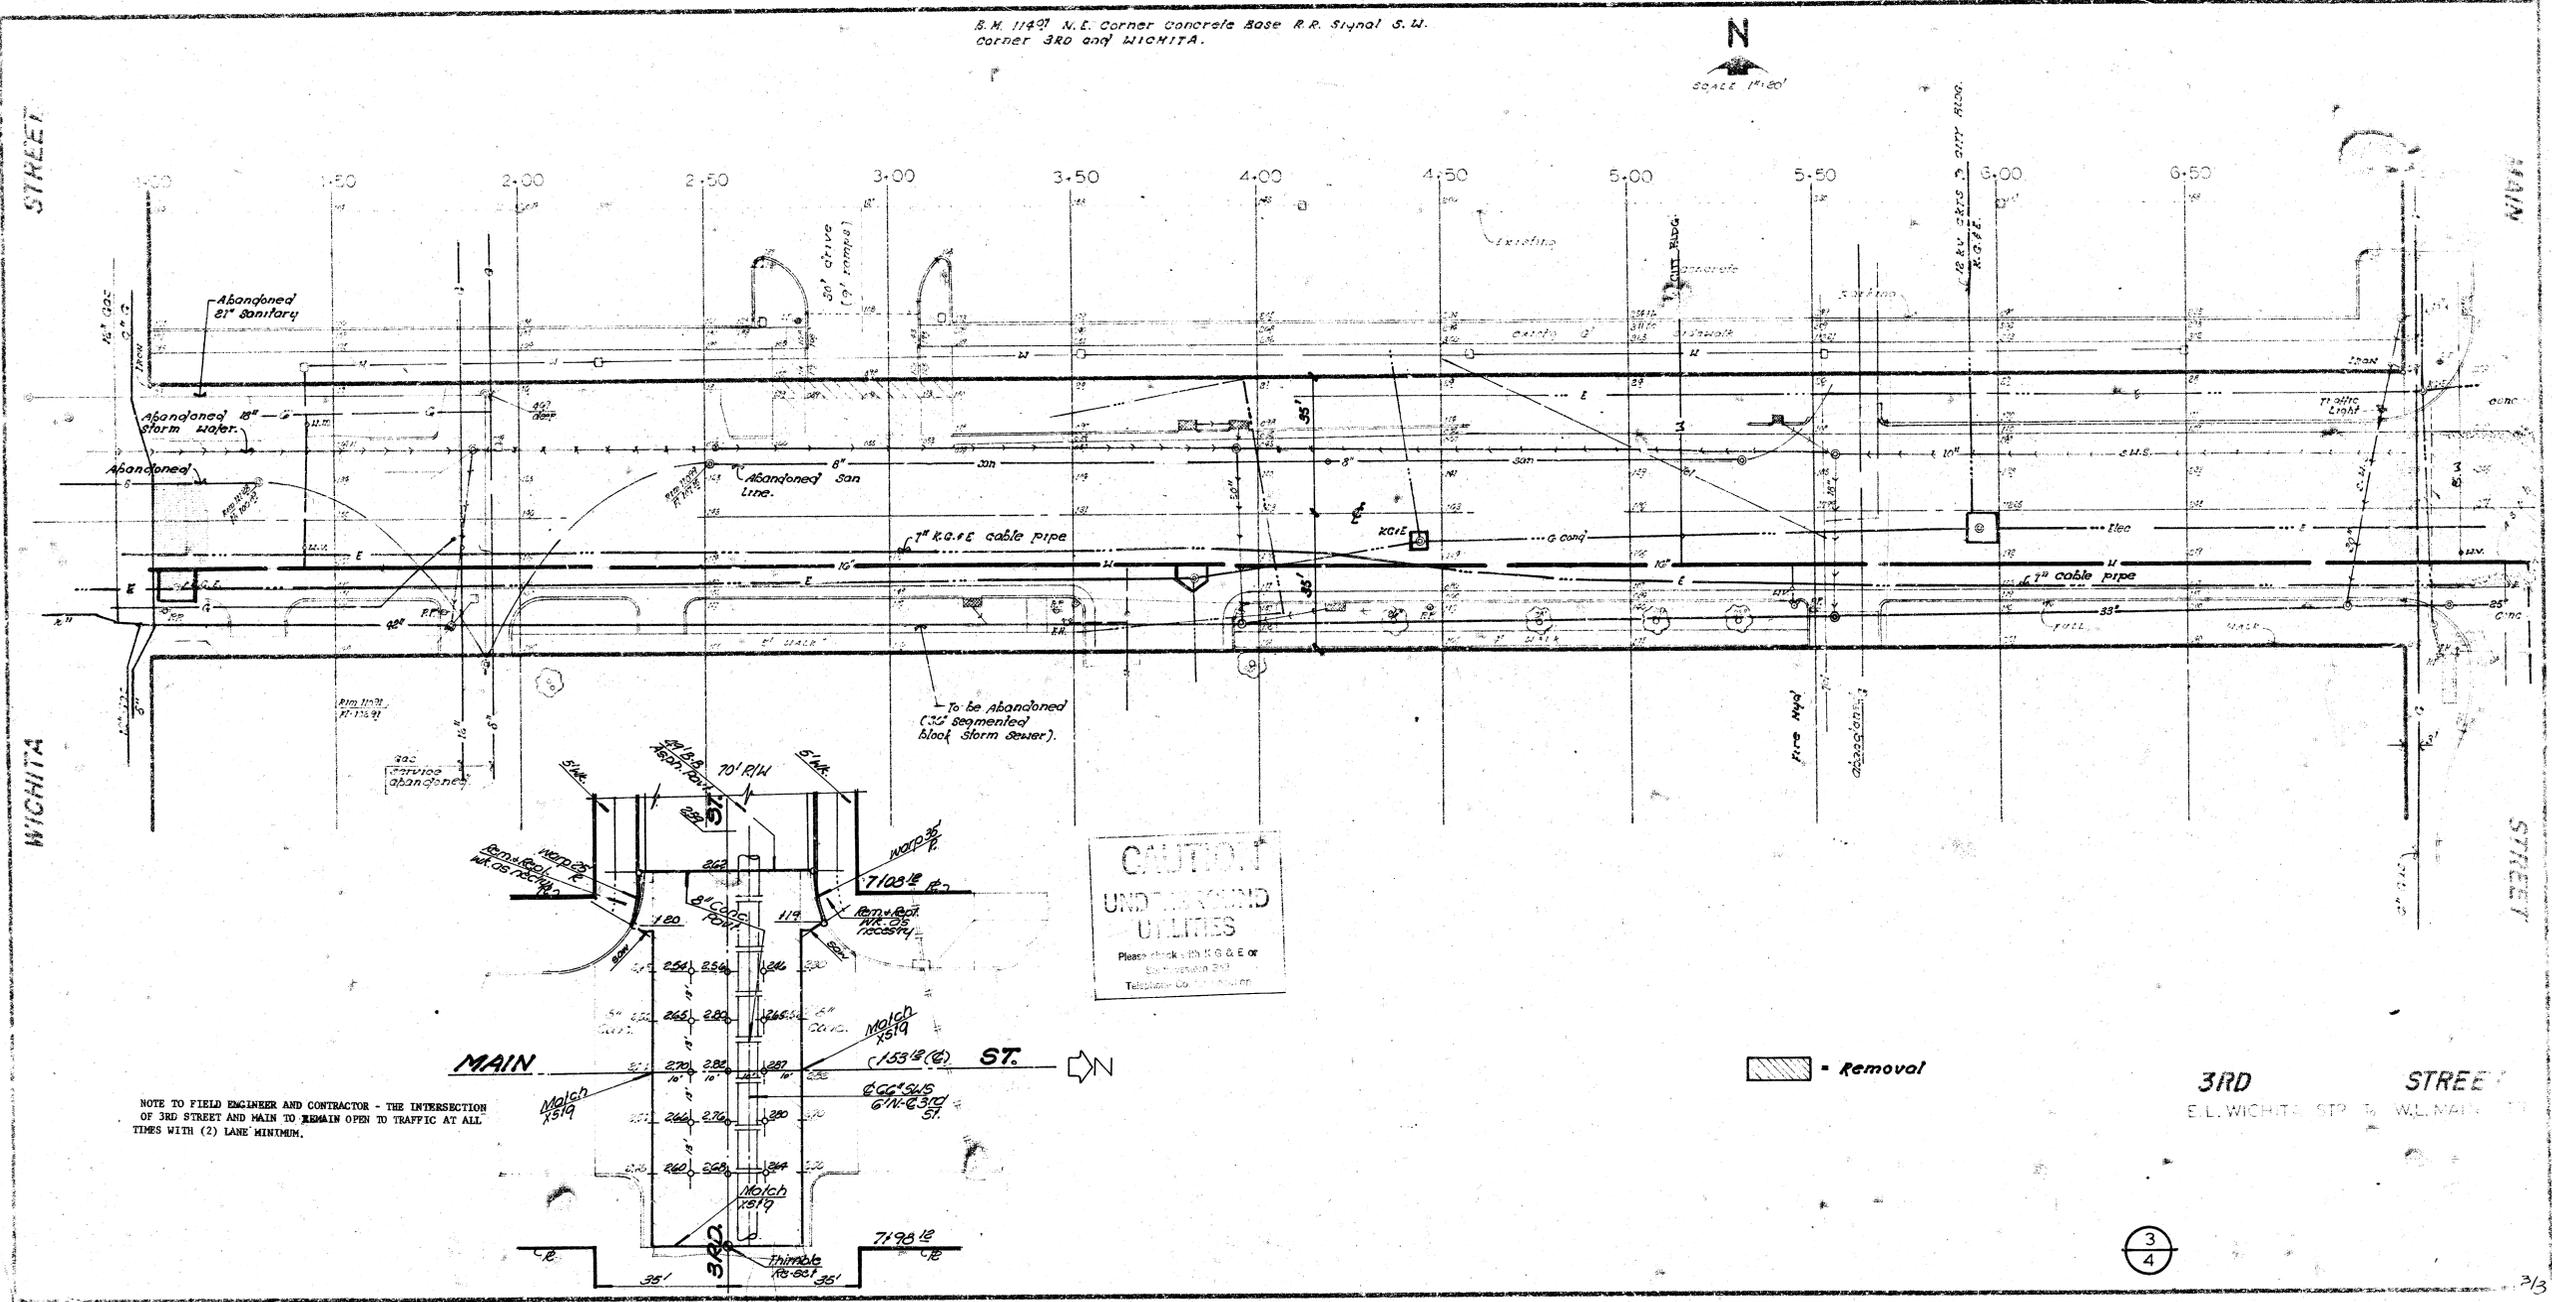

NOTE TO FIELD ENGINEER AND CONTRACTOR - THE INTERSECTION OF 3RD STREET AND MAIN TO REMAIN OPEN TO TRAFFIC AT ALL TIMES WITH (2) LANE MINIMUM.

CAUTION
UNDERGROUND UTILITIES
Please check with G & E or
Sanitation Dept
Telephone Co. for location.

- Removal

3
4

FILMED FROM THE BEST AVAILABLE COPY.....