
ELINE IS CTR. THIRD ST.

B.M. 114.76 STD. S.W. COR. 2ND & VINE
B.M. 116.09 "M" IN MULLER FIRE HYDRANT S.E. 3RD & VINE

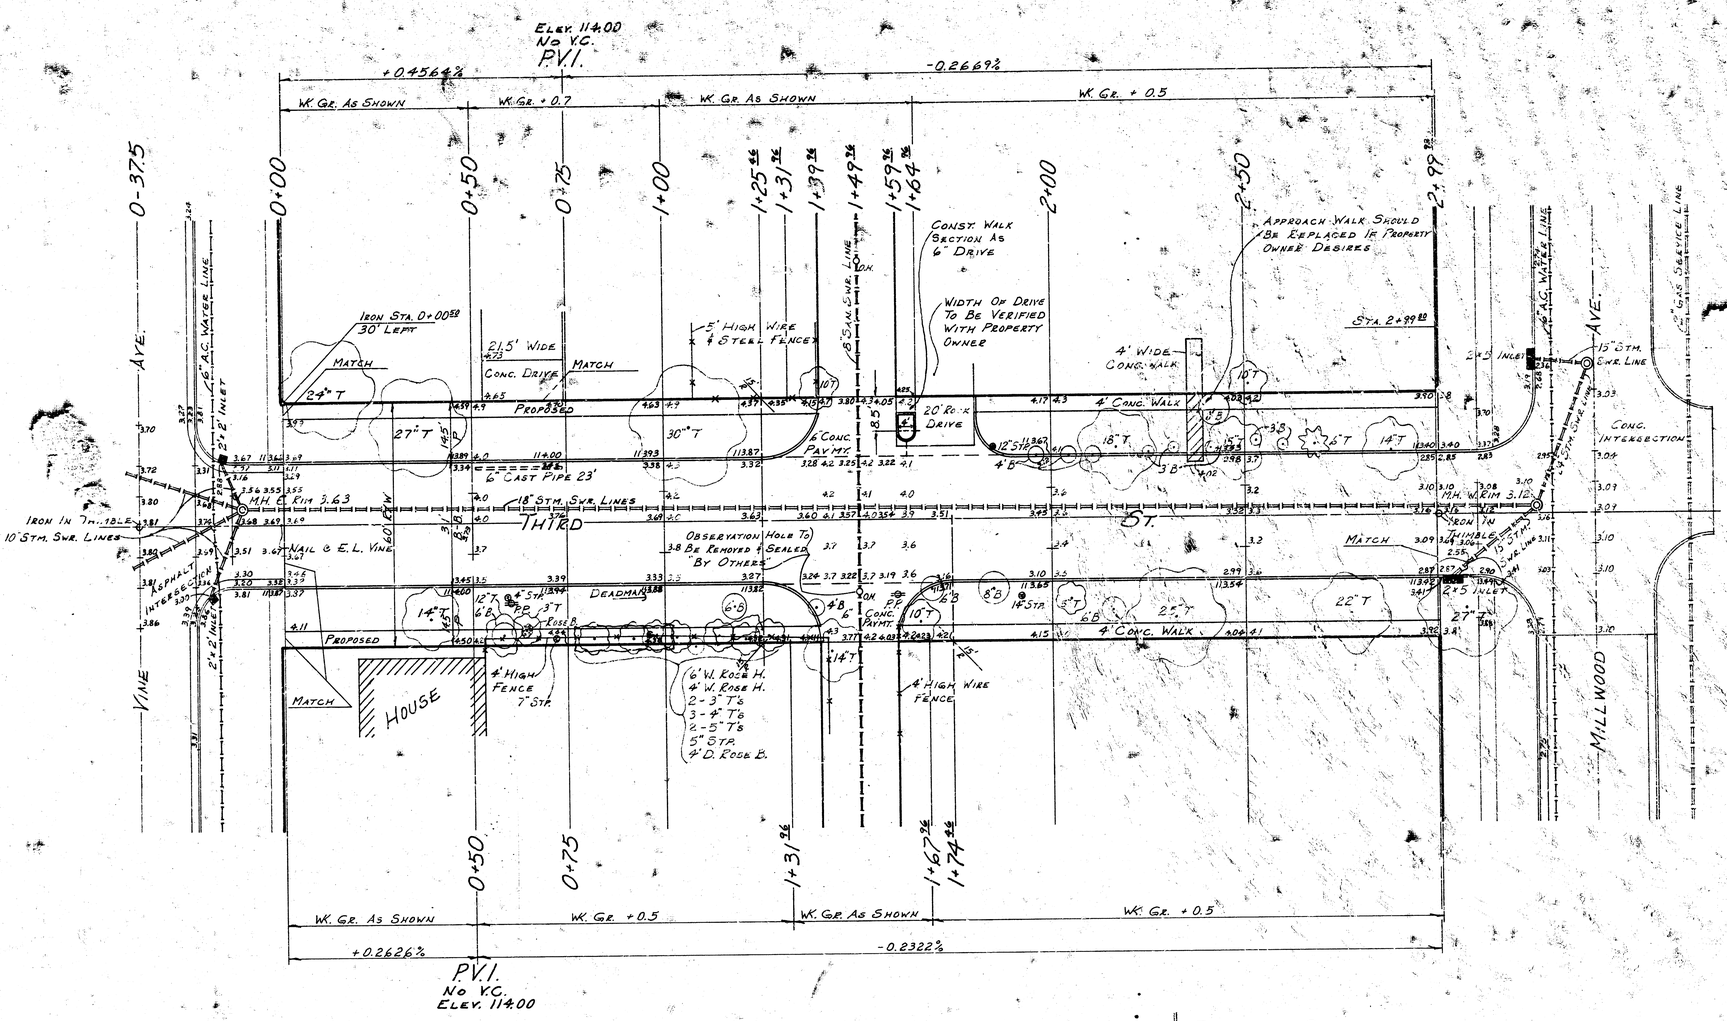

SCALE 1"=20'

DONALD E. SCHIEDT LICENSED 6311 KANSAS PROFESSIONAL ENGINEER

NOTE: CONTRACTOR TO CLEAR RIGHT-OF-WAY, GRADE PARKINGS, AND CONSTRUCT COMPACTED FILL WHERE NECESSARY FOR PROPOSED SIDEWALK. SIDEWALK TO BE CONSTRUCTED BY OTHERS. FIELD ENGINEER IS TO DETERMINE THE TYPE OF SUBGRADE TREATMENT WHICH IS TO BE USED. SUBGRADE TREATMENT MAY CONSIST OF LIME TREATED SUBGRADE, CEMENT TREATED SUBGRADE, RE-COMPACTION OF EXISTING SUBGRADE MATERIAL AS SPECIFIED IN STANDARD SPECIFICATIONS, OR ANY COMBINATION OF THESE.

EARTHWORK PROPERTY

EXCAVATION 353.6 CU. YDS.	COMPACTED FILL 1.3 CU. YDS.
+10% 35.4 CU. YDS.	+10% 0.1 CU. YDS.
TOTAL 389.0 CU. YDS.	TOTAL 1.4 CU. YDS.

EARTHWORK CITY

EXCAVATION 48.9 CU. YDS.
+10% 4.9 CU. YDS.
TOTAL 53.8 CU. YDS.

THIRD ST.
E.L. VINE TO W.L. MILLWOOD
DODGES 2ND ADDITION
CONCRETE PAVEMENT
30' CONCRETE & CURB
CITY OF WICHITA, KANSAS
R.W. LINN CITY ENGINEER
PROJ. NO. DAKS 574001
DATE: April 1974