
12th STREET

W.L. DOUGHERTY ST. SO. to the W.L. ZOO BLVD.


DAKS574089

TYPICAL SECTIONS OF 30' CONCRETE PAVEMENT

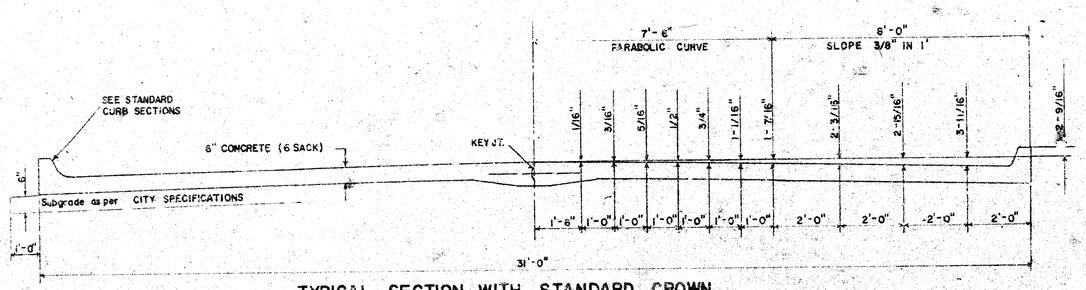


TYPICAL SECTION WITH STANDARD CROWN

TYPICAL SECTION WITH ALTERNATE CROWN

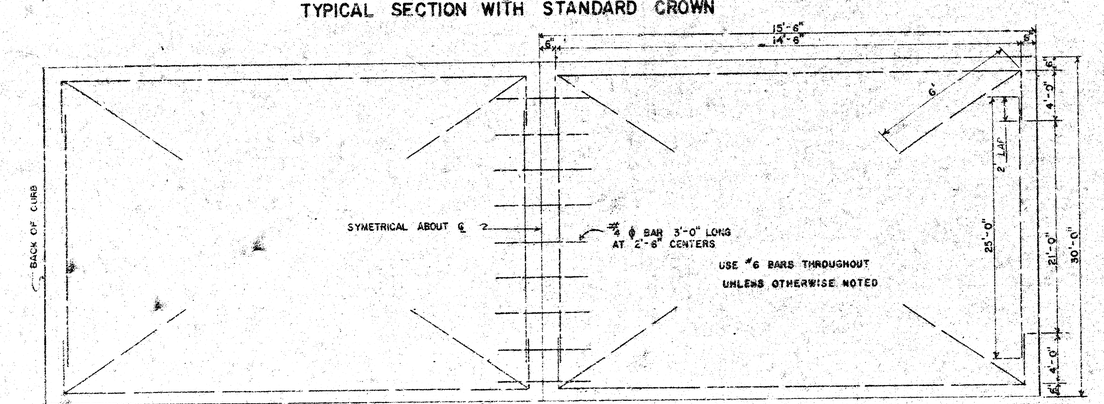


STEEL PATTERN

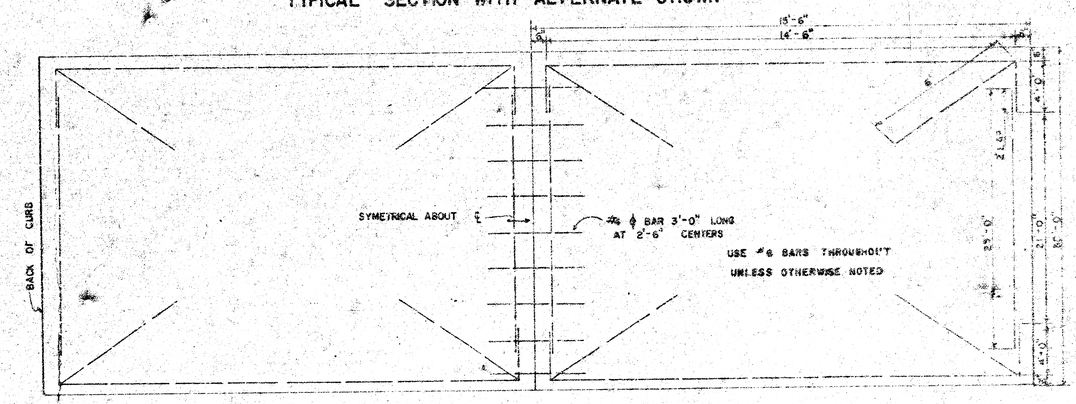


STEEL PATTERN


STANDARD SECTIONS OF




INTEGRAL CURB



ROLL-TYPE



ALTERNATE ROLL-TYPE



JOINT DETAILS

GENERAL NOTES

1. CONTRACTION JOINTS MAY BE CONSTRUCTED IN INTEGRAL CURB BY SAWING WITH AN APPROVED CONCRETE SAW. THE SAW CUT SHALL EXTEND THROUGH THE CURB TO THE PAVEMENT. SAWED CONTRACTION JOINTS SHALL HAVE A MAXIMUM SPACING OF 10'.

2. INTEGRAL CURB SHALL BE TIED TO THE PAVEMENT BASE WITH SHORT DEFORMED DOWEL BARS SPACED AT 2'-6" INTERVALS. THESE DOWEL BARS SHALL NOT BE LESS THAN 1/2" OR MORE THAN 3/4" IN DIAMETER.

CITY OF WICHITA, KANSAS

Department of Public Works — Engineering Division

R.W. Linn — City Engineer


Date: — Project No. DAKS574089

135

FILMED FROM THE BEST AVAILABLE COPY.....

B. M. 125.88' "□" IN SURFACE OF SIDEWALK, SO. SIDE 12TH ST. AT W. L. DOUGHERTY NO.

SCALE: 1"=20'

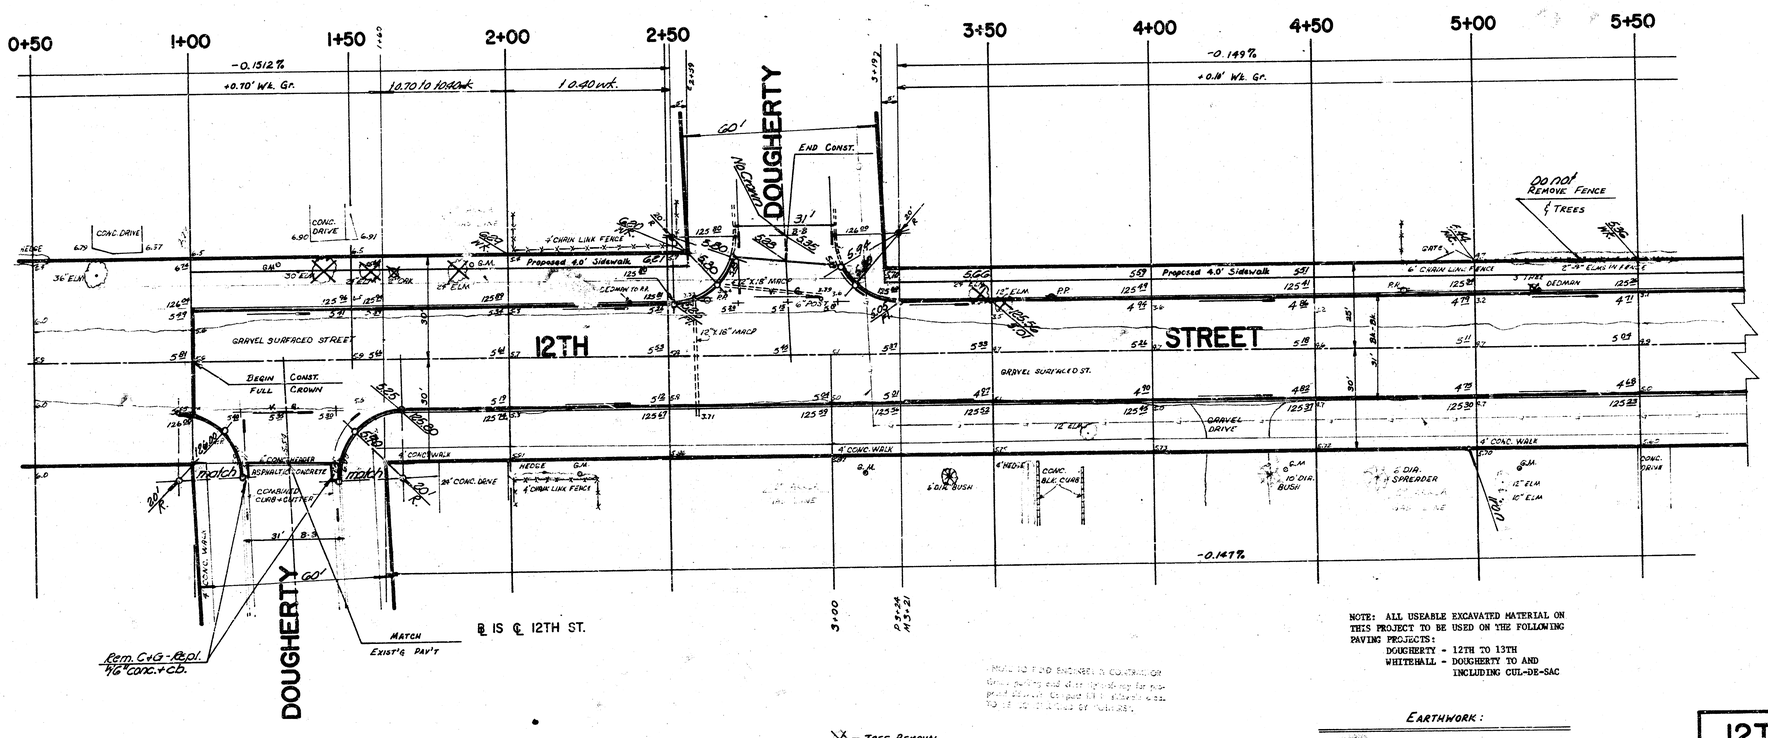

SURVEY DATED 6/8 DTD 19
PLAN HEARD
FILE HEARD
CHECKED

NOTE: ALL USEABLE EXCAVATED MATERIAL ON THIS PROJECT TO BE USED ON THE FOLLOWING PAVING PROJECTS:
DOUGHERTY - 12TH TO 13TH
WHITEHALL - DOUGHERTY TO AND INCLUDING CUL-DE-SAC

SUBGRADE

TYPE OF SUB-GRADE TREATMENT SHALL BE AS DETERMINED BY SOILS ENGINEER. THIS SHALL INCLUDE THAT PORTION OF THE SUB-GRADE UNDER THE CURB, GUTTER, SIDEWALK, DRIVE APPROACH WORK, OR ANY CONCRETE PAVING.

EARTHWORK:


-PROPERTY-			-CITY-		
EXCAVATION	= 632.9	C.Y.	EXCAVATION	= 48.5	C.Y.
+10%	= 63.3	C.Y.	+10%	= 4.9	C.Y.
	696.2	C.Y.		53.4	C.Y.
COMPACTED FILL	= 139.7	C.Y.	COMPACTED FILL	= 9.3	C.Y.
+10%	= 14.0	C.Y.	+10%	= .9	C.Y.
	153.7	C.Y.		10.2	C.Y.

12TH. STREET

W. L. DOUGHERTY SO. TO W. L. ZOO BLVD.; 30' CONC W/ INT. CB.
CITY OF WICHITA, KANSAS
R. W. LINN, CITY ENGINEER
DAKS574089

2/13

B.M. 125.88' "□" IN SURFACE OF SIDEWALK, SO. SIDE 12TH ST. AT W. L. DOUGHERTY NO.

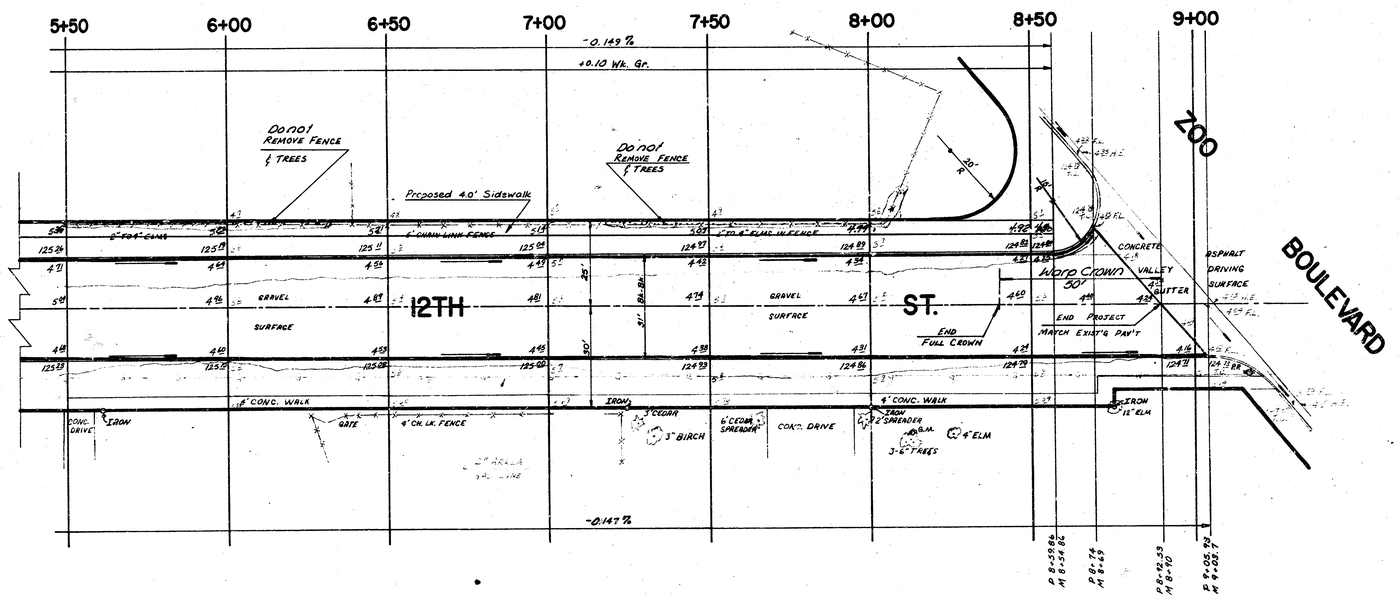

℄ IS ℄ OF 12TH ST.

SCALE: 1" = 20'

12TH STREET
PROJ. NO. DAKS574089

3/13