


FIELDCREST CIRCLE
N.L. PARKDALE TO & INCL CUL-DE-SAC
PROJ No. 472-76-245-80527 000-000-001

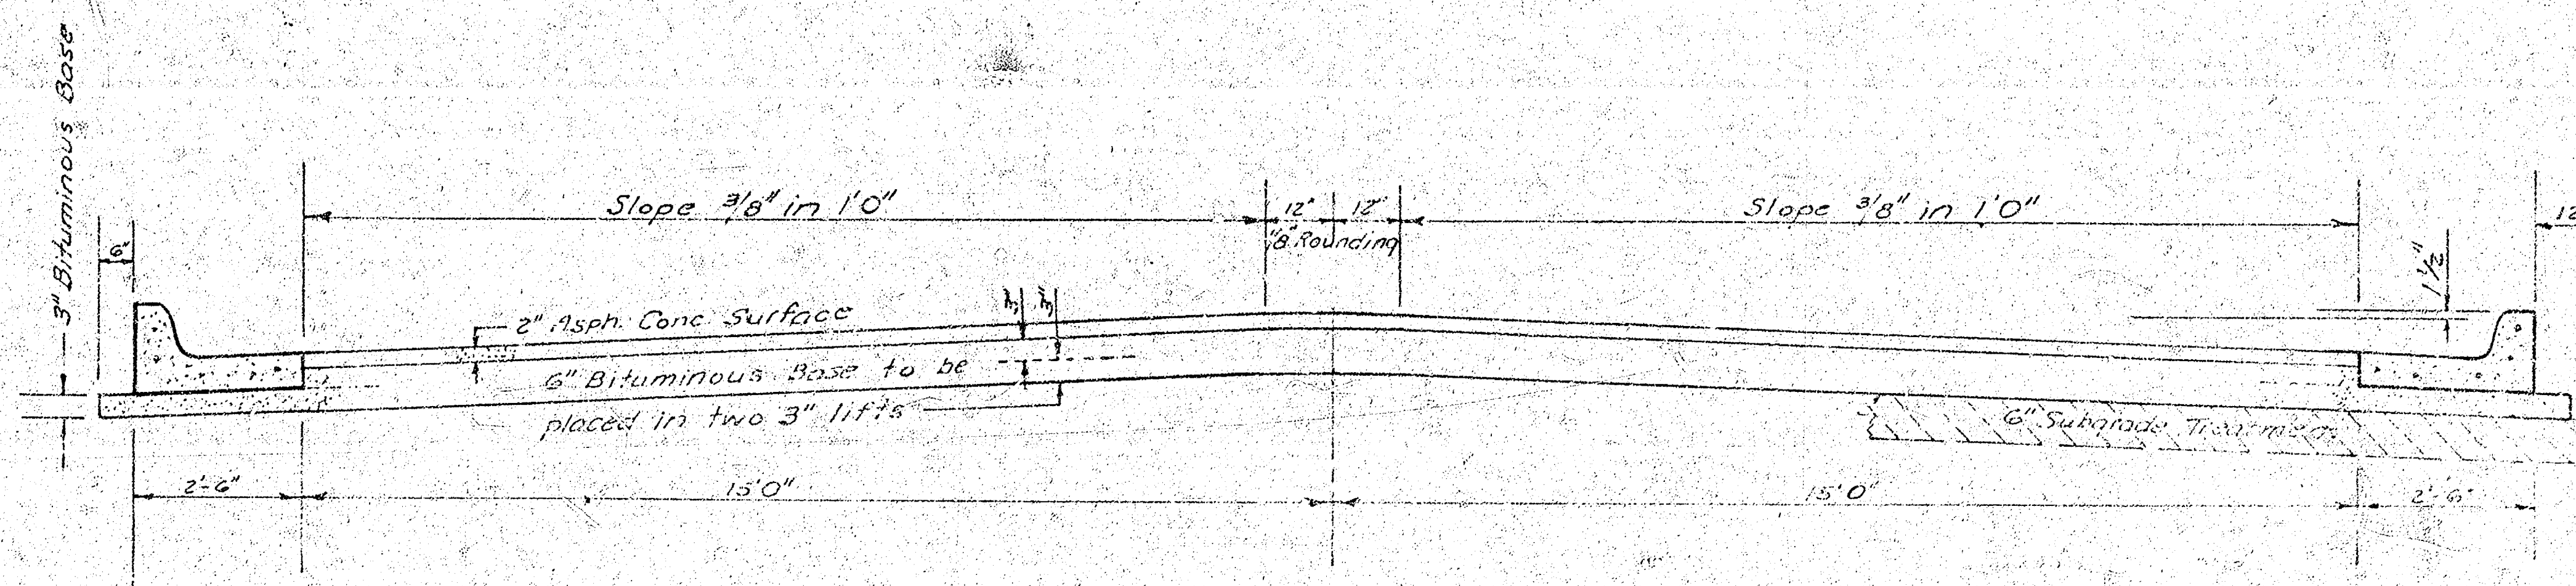


TYPICAL SECTION

35' ASPHALTIC CONCRETE PAVEMENT WITH BITUMINOUS BASE

A TACK COAT OF EMULSIFIED ASPHALT (SS-1H) SHALL BE APPLIED AT AN APPROXIMATE RATE 0.05 GALLONS PER SQ YD BETWEEN LIFTS OF ASPHALTIC MATERIALS WHEN ORDERED BY THE ENGINEER. TACK COAT WILL NOT BE PAID FOR DIRECTLY AND SHALL BE CONSIDERED AS SUBSIDIARY TO PRICE BID FOR ASPHALTIC PAVEMENT.

BITUMINOUS BASE AND ASPHALTIC CONCRETE WEARING SURFACE SHALL BE PLACED WITH A LAYDOWN MACHINE HAVING AUTOMATIC ELECTRONIC CONTROLS FOR CROWN AND GRADE. CONSTRUCTION JOINTS IN EACH LIFT SHALL BE STAGGERED A MINIMUM DISTANCE OF 1' WITH JOINTS IN PRECEDING LIFTS AND PLACED SUCH THAT A JOINT WILL BE CONSTRUCTED ON THE CENTERLINE IN THE TOP LIFT.


DETAIL OF TRANSVERSE CONSTRUCTION JOINTS

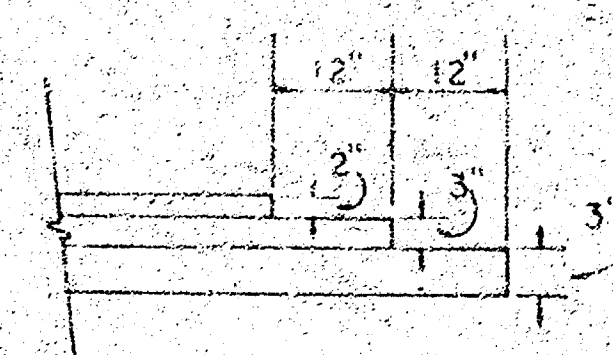


TRANSVERSE CONSTRUCTION JOINTS SHALL BE CONSTRUCTED IN FLEXIBLE BASE PAVEMENTS AT LOCATIONS WHERE PAVEMENT TEMPORARILY ENDS TO FACILITATE FUTURE PAVEMENT CONSTRUCTION AS SHOWN BY DETAIL. THE COST OF CONSTRUCTING THE TRANSVERSE CONSTRUCTION JOINTS SHALL NOT BE MEASURED OR PAID FOR DIRECTLY BUT SHALL BE INCLUDED IN THE BID PRICE FOR SQUARE YARDS OF ASPHALTIC CONCRETE PAVEMENT.

The 4'0" Segment between the curb and gutter shall be paid as Slopes 3/8" in 1'0" (Asphalt Concrete Surface). The Bituminous Base under the curb and gutter shall be paid as Slopes 3/8" in 1'0" (Bituminous Base).

COMBINED CURB & GUTTER

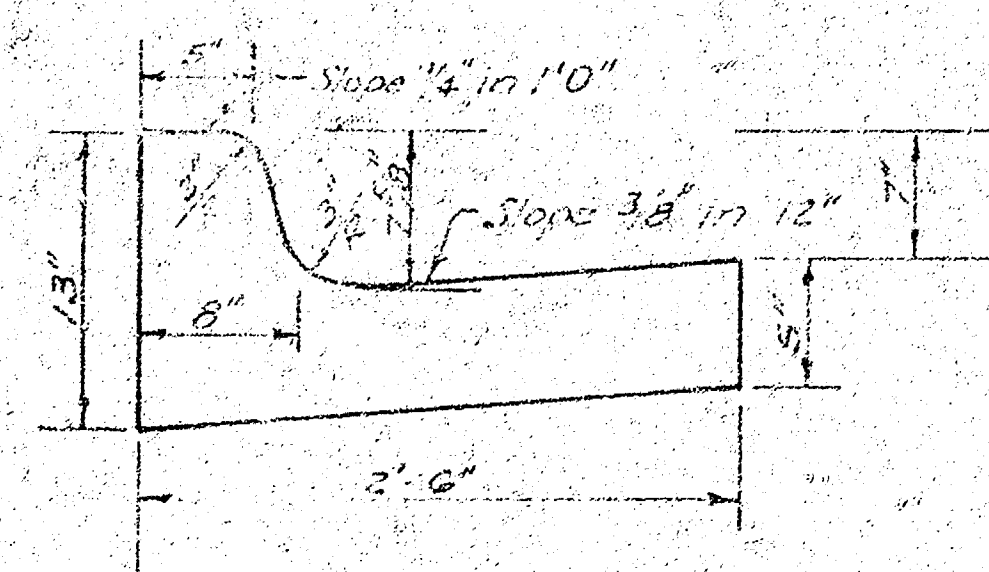

ROLL TYPE CURB & GUTTER

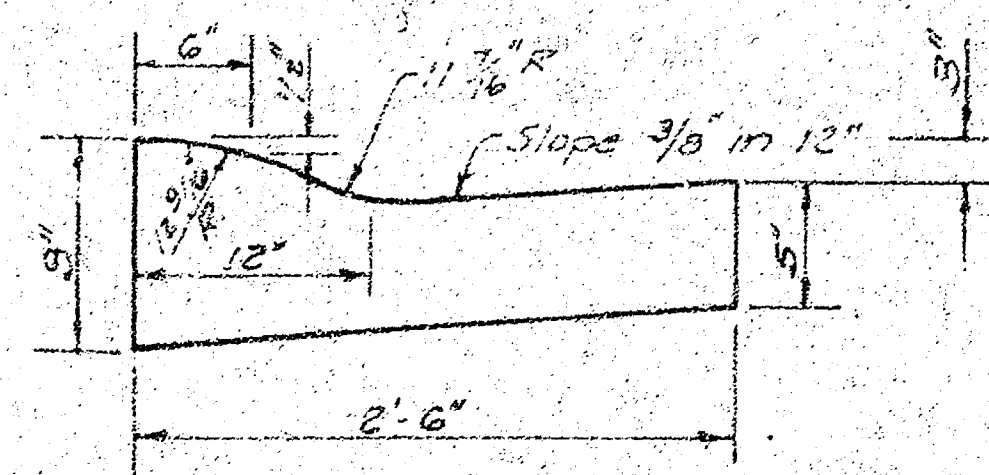

CITY OF WICHITA KANSAS


DEPARTMENT of PUBLIC WORKS - Engineering

Division:
R. W. LINN


CITY ENGINEER

DATE

1/3

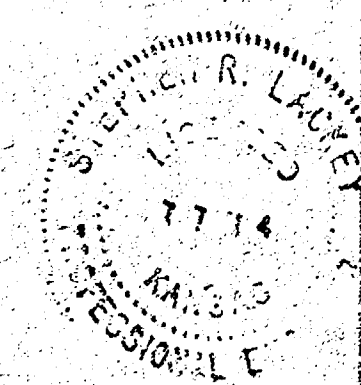

Survey ARNDOR 8/11/12
Plan W.L.E.
Exc " "
Checked C.E.E.

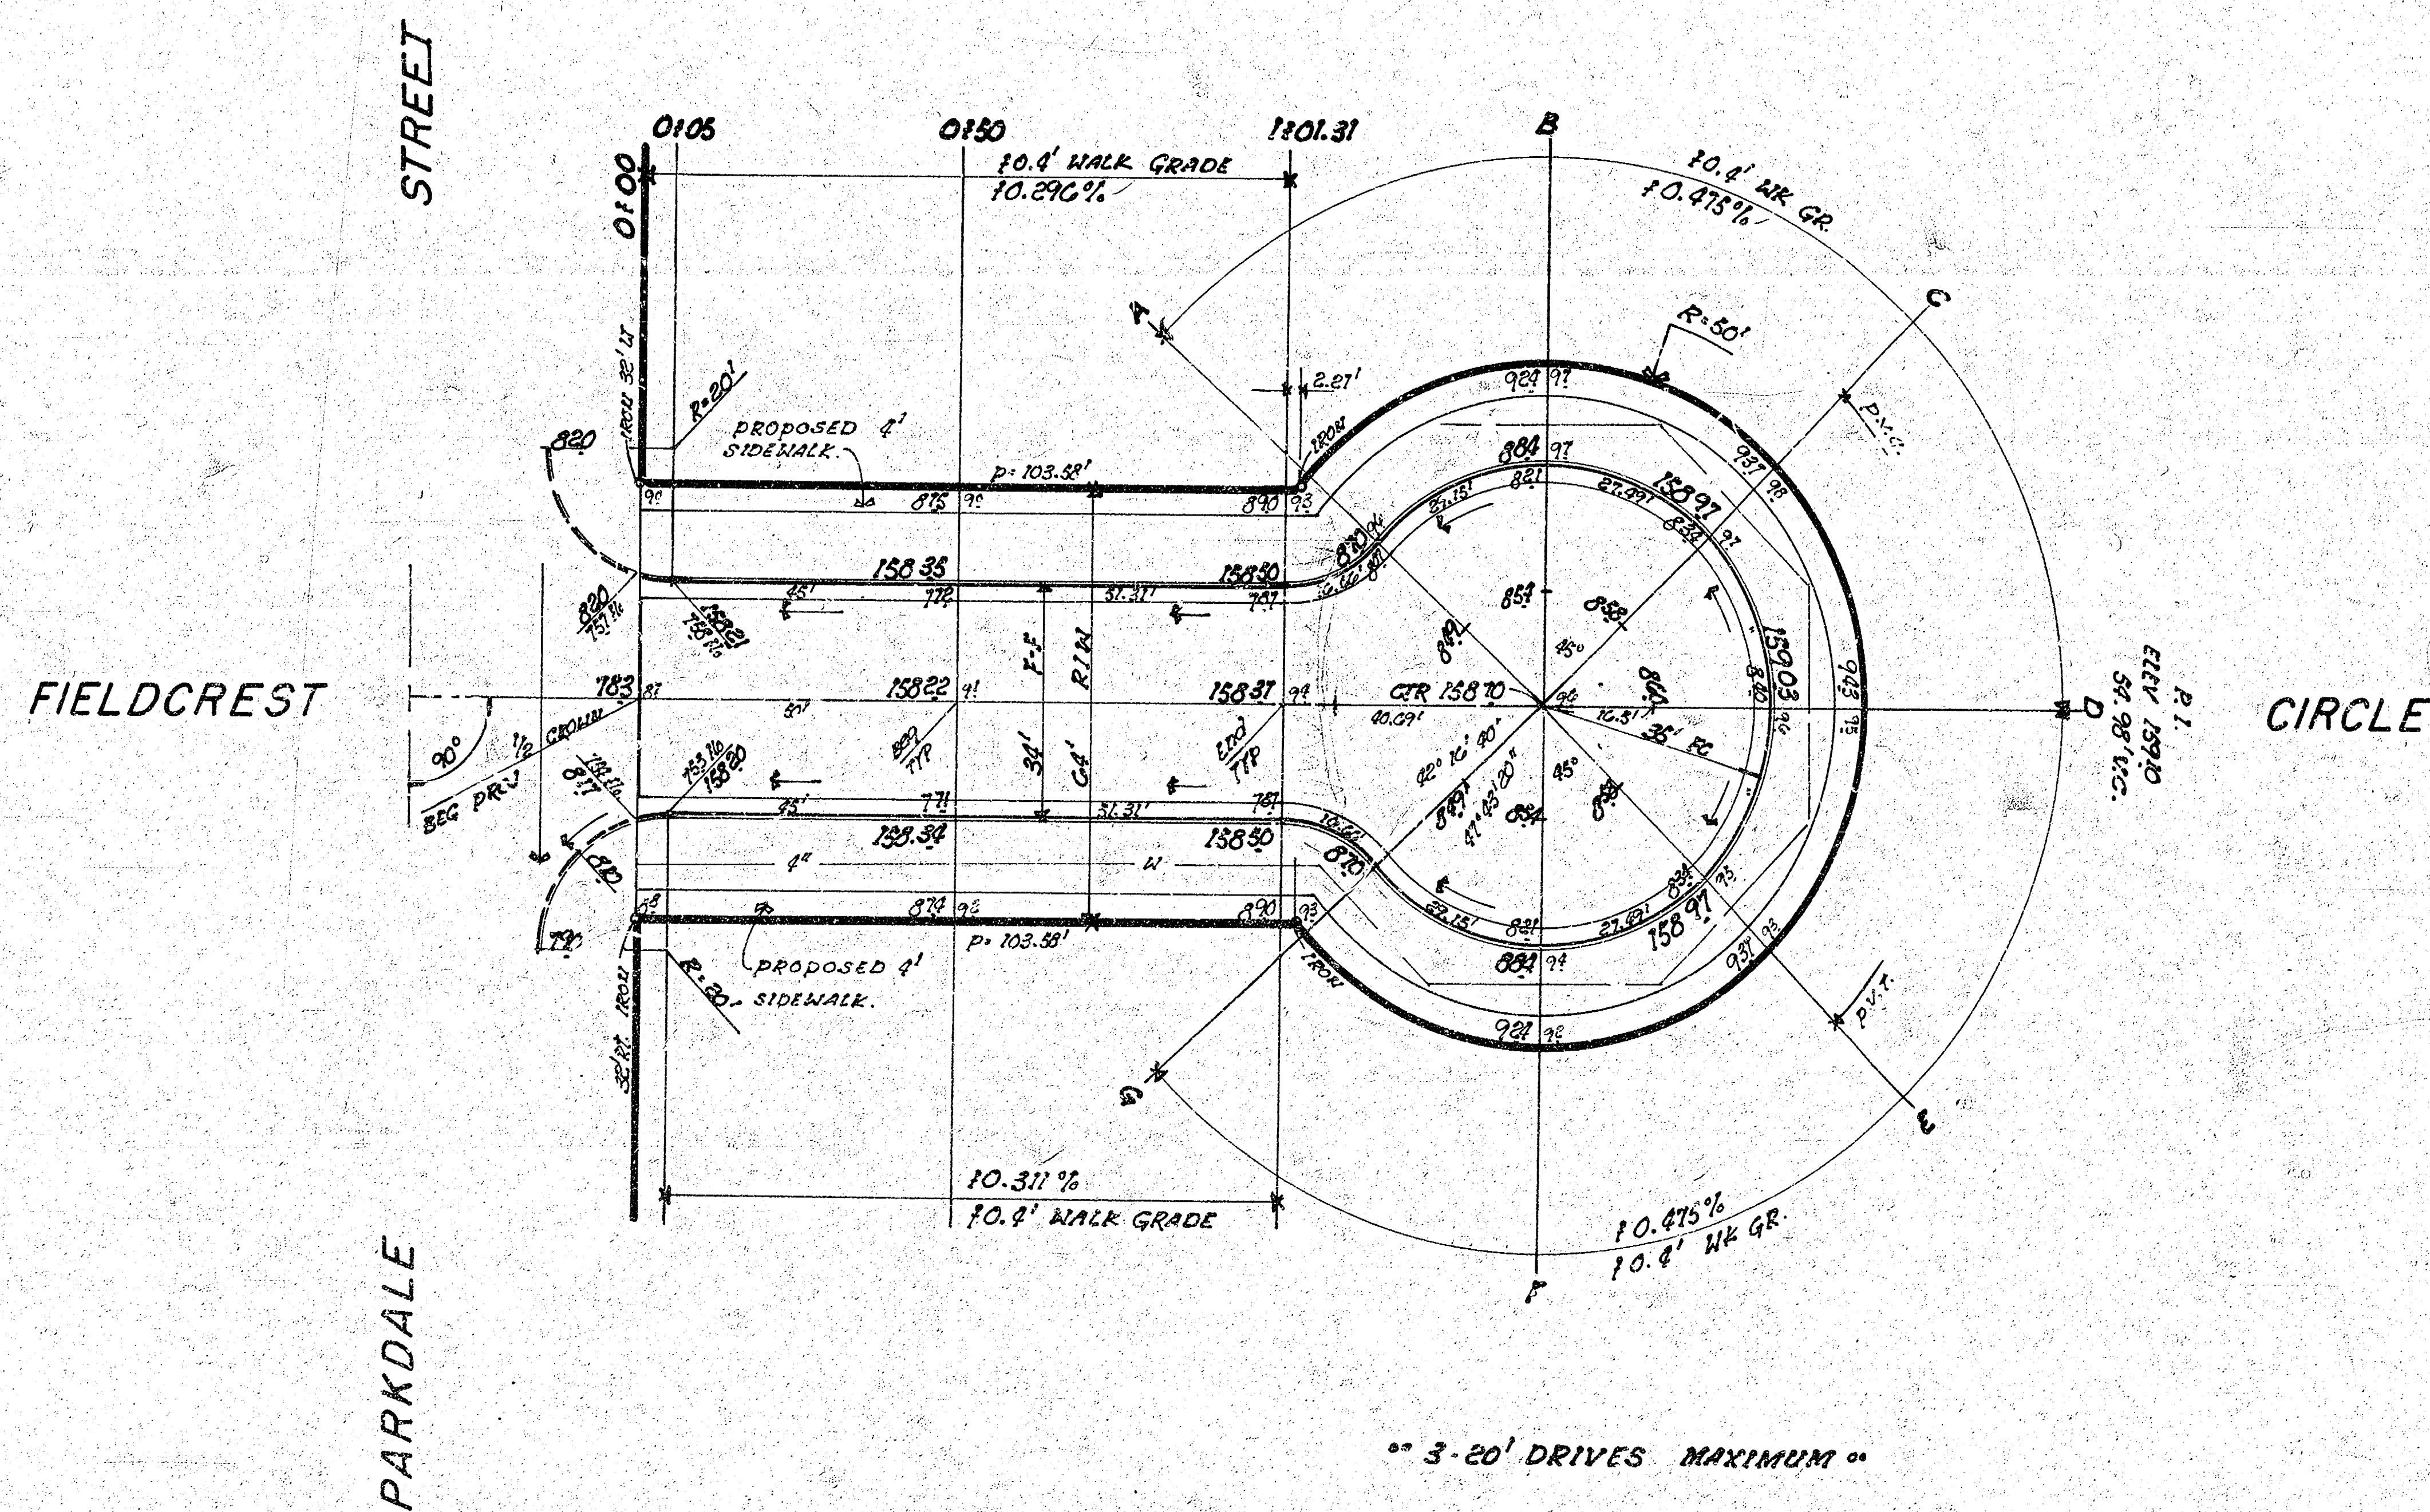

" 3-20' DRIVES MAXIMUM "

NOTE TO FIELD ENGINEER:
Grade points shown on this plan are for the proposed sidewalk. Compare with the existing ground to be constructed by "OTHERS".

SUB-GRADE
TYPE OF SUB-GRADE TREATMENT SHALL BE DETERMINED BY THE FIELD ENGINEER. SUB-GRADE TREATMENT MAY CONSIST OF LIME TREATMENT, CEMENT TREATMENT, SUB-GRADE MODIFICATION, OR ANY COMBINATION OF THESE.

" EXCAVATION "
611.1 cubic yards
110% G.I.
TOTAL 672.2 cubic yards

905 99 YARDS MANIPULATION

FIELDCREST CIRCLE
N.L. PARKDALE TO & INCL. CUL-DE-SAC.
CITY of WICHITA, KANSAS
(34' F.F.) 2" ASPH CONC WEARING SURFACE
2" BITUMINOUS BASE 4" COMB CB & GUTTER
R.W. LINN CITY ENGINEER
DATE _____
PROJ No. 472-X-245-80527000-000-001

2
3