

Maintain 634 L.F. silt fence per detail, sheet 8.

Maintain 550 L.F. cut-off trench per detail, this sheet.





Maintain 1,440 S.Y. Curlex II, or approved equal.


Maintain 588 L.F. silt fence per detail, sheet 8.


- NOTES:
- All disturbed ground shall be seeded and mulched as follows (Permanent Seeding)
SEED -- Kansas Premium Fescue Blend; 8#/1000 Sq. Ft.
FERTILIZER -- 12-24-12 Ratio at 350 Lbs./Ac.
MULCH -- 2 Tons Prairie Hay / Acre

Maintain one construction entrance onto existing paved roadway per detail, sheet 9.

EROSION CONTROL PLAN LEGEND
 (Installation Details Found in the SWP2 Plan)

-  - DROP INLET PROTECTION
-  - STRAW BALE BARRIERS
-  - SILT FENCING
-  - CUT-OFF TRENCH
NO SCALE

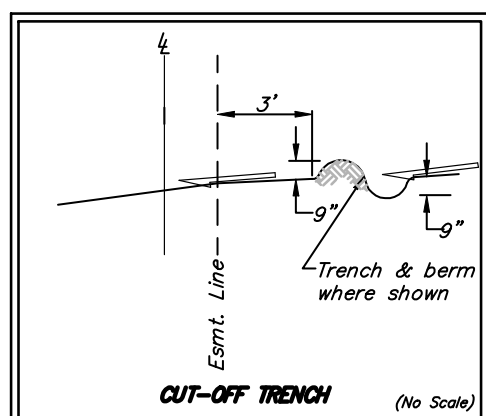

		MEADOWLAKE BEACH ADD.	
		EROSION CONTROL PLAN	
		WATER MAIN IMPROVEMENTS	
<small>Baughman Company, P.A. 315 Ellis St. Wichita, KS 67211 P 316-262-7771 F 316-262-0149 ENGINEERING SURVEYING PLANNING LANDSCAPE ARCHITECTURE</small>			
PROJECT NUMBER 448-00285	DESIGN ATD	DRAWN TMS	
REVISIONS:	APPROVED	DATE 11/07	
	SCALE Noted	SHEET	
			5 OF 11
MeadowlakeBeach/WtrMainECplan			06-12-E714

—1265— Proposed Grade