B.M. 108.90 STD. SE COR. McCORMIC & MERIDIAN
B.M. 111.53 SW COR CONC. PORCH HOS. #2380 W. IRVING

STATIONING ON ℄

TIES TO IRON ℄ ST. CLAIR & ℄ IRVING
70.76 SE TO NW COR. HO. FOUNDATION
73.71 SW TO NE COR. HO. FOUNDATION
78.57 NW TO SE COR. HO FOUNDATION
39.53 NE TO 60d SPIKE SE SIDE P.P.

TIES TO IRON ℄ SEDGWICK & ℄ IRVING
176.38 N.W. TO SE COR. HOUSE FOUNDATION
73.85 N.E. TO SW COR. HOUSE FOUNDATION
72.63 SE TO N.W. COR. HOUSE FOUNDATION

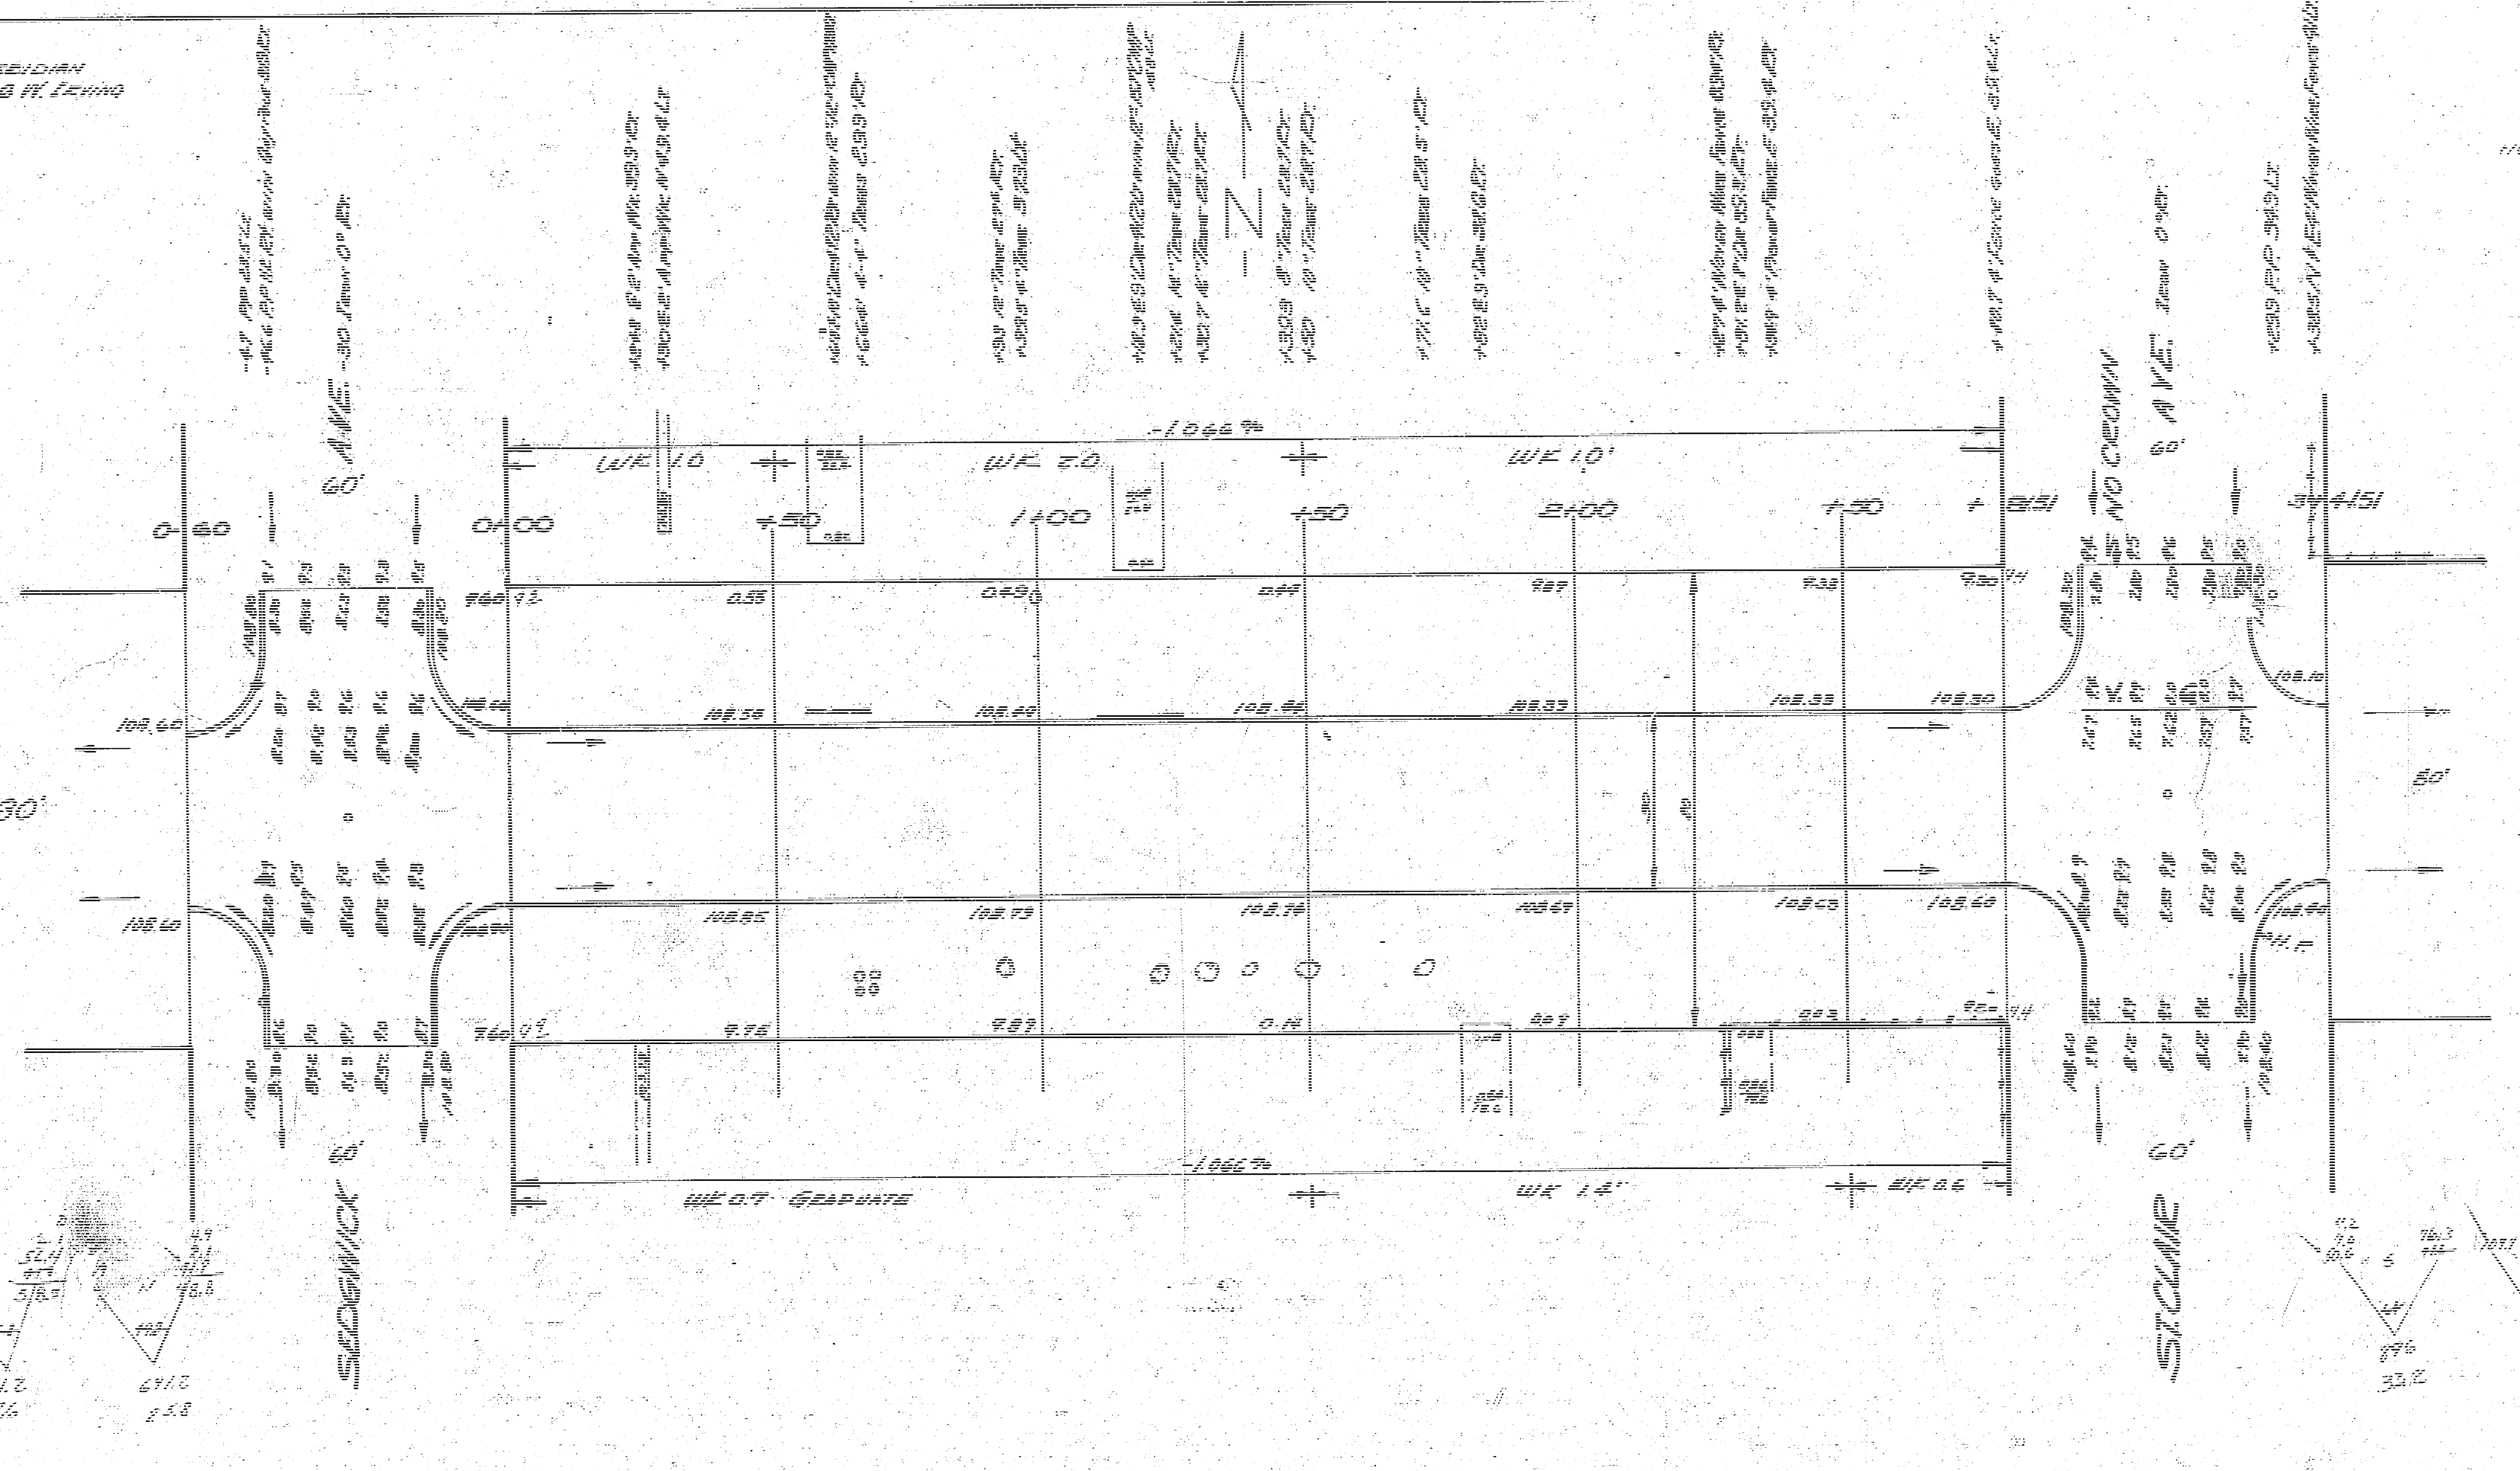
SEDGWICK AVE.
60'
30'
0-60
0+00
+50
1+00
+50
2+00
+50
2+81.51
3+44.51
WK 1.0
WK 2.0
WK 1.0'
-1.066%
NO CROWN
ST. CLAIR AVE.
60'
80'
WK 0.7 GRADUATE
WK 1.4'
W.F. 0.6
108.60
108.56
108.40
108.33
108.30
108.85
108.73
108.74
108.69
108.60

EXCAVATION

CITY 330.2 +10% 33.1 363.3 YDS³
PROP. 819.4 +10% 81.9 901.3 YDS³

Survey Merrod Bk
Plan D.S.
Dec 12 '56
Checked

IRVING

WL SEDGWICK TO EL ST. CLAIR
30' CONCRETE & CURB

CITY OF WICHITA
B E SMITH CITY ENGINEER
JUNE '53 PROJ. 613-29

B. E. SMITH 438