
Remove shaded section of exist pvt & cb. Replace pvt. to new cb. line & construct new V.G.

NOTE: Stationing taken from State Hwy plans

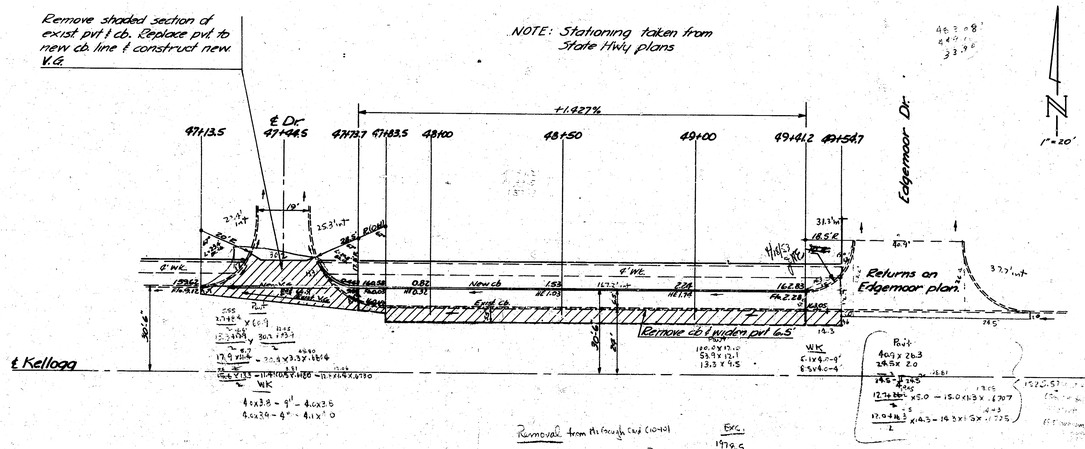

Earthwork Est. D.E.C. Checked

Removal from Rt through curb (10+01)

GES: (see over leaf) 2 ea

Part Rim

w/o Rim

Exc.

Recapitulation

214.9 lin ft mi cb	0.53	113.40
223.9 sq yds pavt	2.65	871.85
13.64 cu yds conc	16.50	225.36
5 = 0 sq ft 4" walk	0.75	38.10
66.0 sq ft 4" walk	0.35	23.10
Allow. of total	0.13	172.35
GES lin ft curb & gutter	0.95	51.36
166.6 sq yds pavt rem	1.50	249.90
116.8 sq ft walks	0.15	17.52
7.5 % Contingencies	1.10	24.30
		1739.18

Earth Thickness

6'-6" Widening Section

Slope of widening section 0.5" per ft

SECTION OF PVT WIDENING ℄ C.B.

KELLOGG WIDENING
N.S. KELLOGG at VET. ADMIN.
E.S. EDGEMOOR-VET. ADMIN. DR.

Checked by Edgemoor Job

A 3 1 (18)