

STA. 0+62.54 LINE 1
STREET STA. 10+52.98, 18.84' LT. (F.I.F.)
CONSTRUCT INLET TYPE 1A
L = 10'-0" W = 3'-0"
TOP ELEV. = 1383.72

STA. 0+00 LINE 1
INSTALL 30" END SECTION
FL OUT = 1376.00
INSTALL 33 S.Y. LIGHT
STONE RIP-RAP AS INDICATED

STA. 1+03.22 LINE 1
STREET STA. 10+52.98, 18.84' LT. (F.I.F.)
CONSTRUCT INLET TYPE 1A
L = 10'-0" W = 3'-0"
TOP ELEV. = 1383.72



STA. 3+16.26 LINE 1
CONSTRUCT STANDARD MH TYPE P
DIA. 5.0' W/ BEEHIVE TOP
TOP ELEV. = 1383.90

STA. 3+16.26 LINE 1
CONSTRUCT STANDARD MH TYPE P
DIA. 5.0' W/ BEEHIVE TOP
TOP ELEV. = 1383.90

STA. 5+28.49 LINE 1
STREET STA. 6+59.95, 18.34' LT. (F.I.F.)
CONSTRUCT INLET TYPE 1A
L = 10'-0" W = 3'-0"
TOP ELEV. = 1384.86

STA. 4+86.66 LINE 1
STREET STA. 6+71.70, 18.34' LT. (F.I.F.)
CONSTRUCT INLET TYPE 1A
L = 10'-0" W = 3'-0"
TOP ELEV. = 1384.91

BRENTWOOD
SOUTH

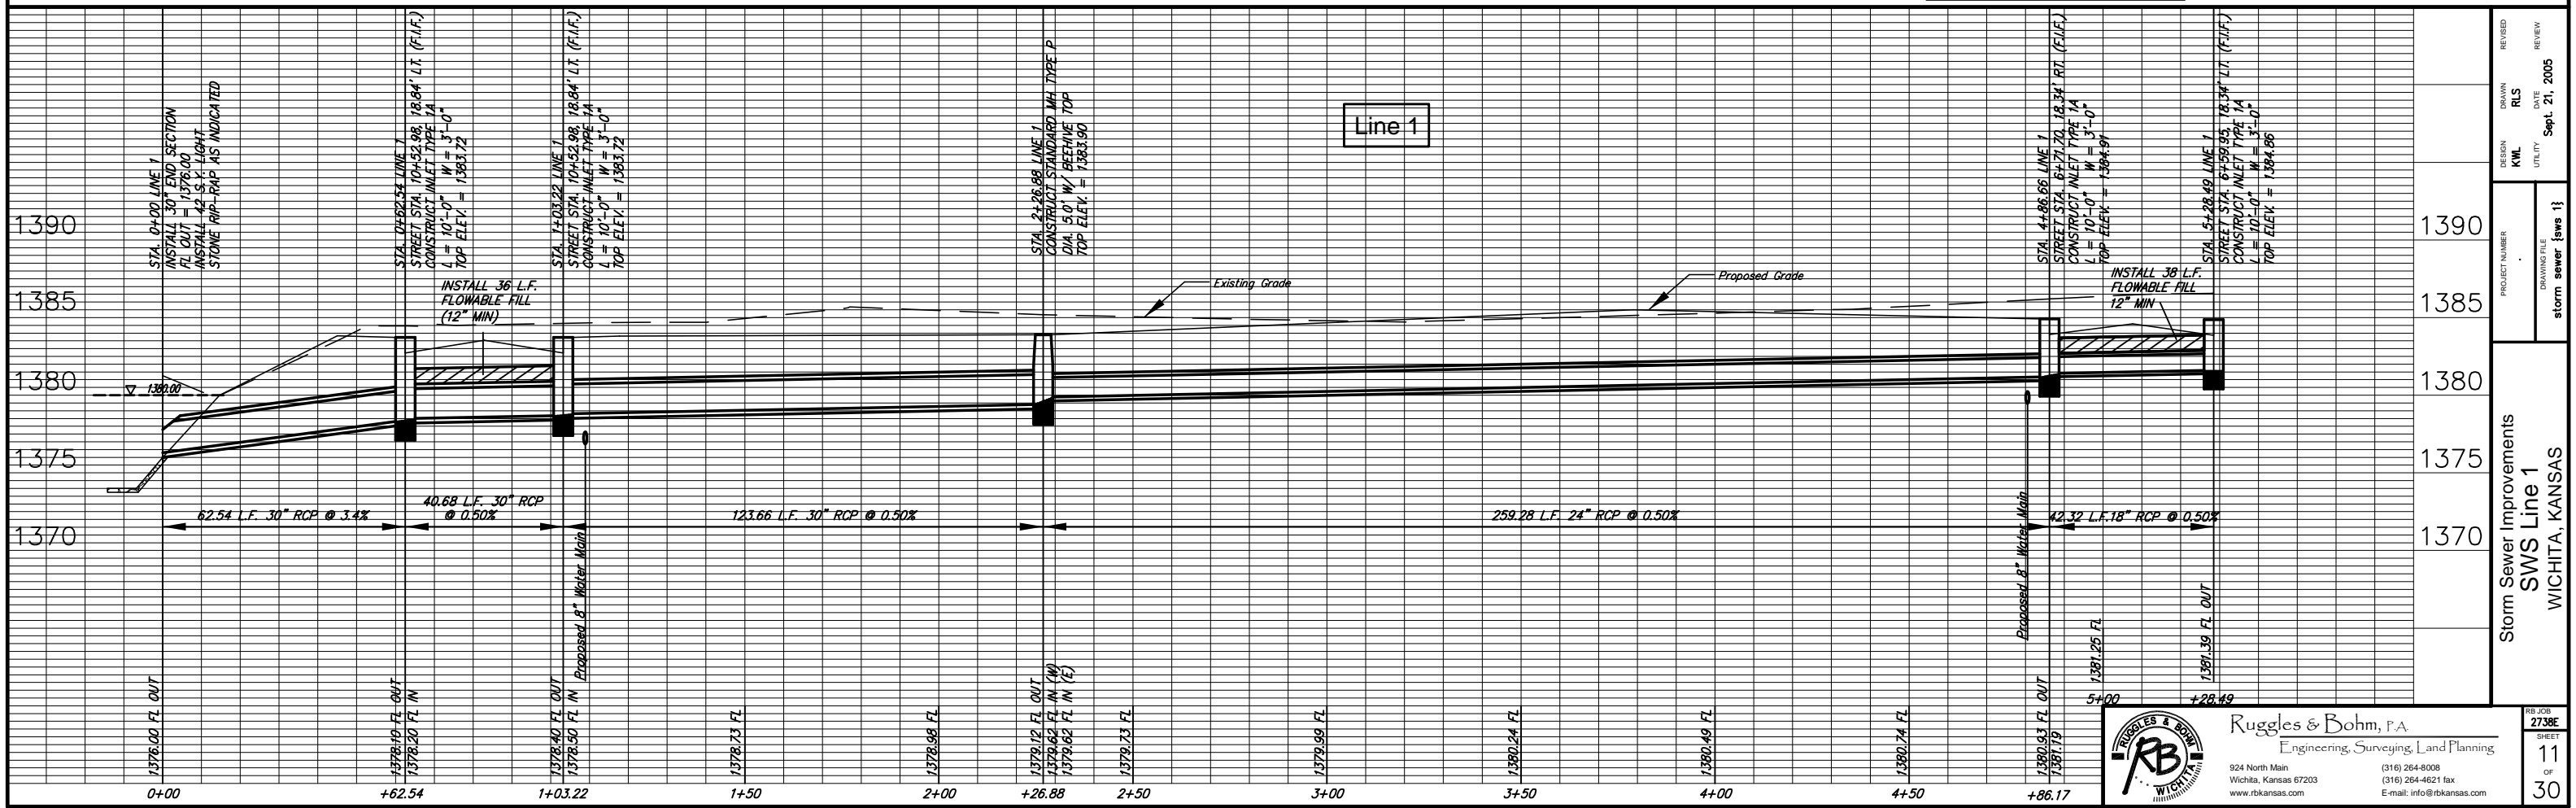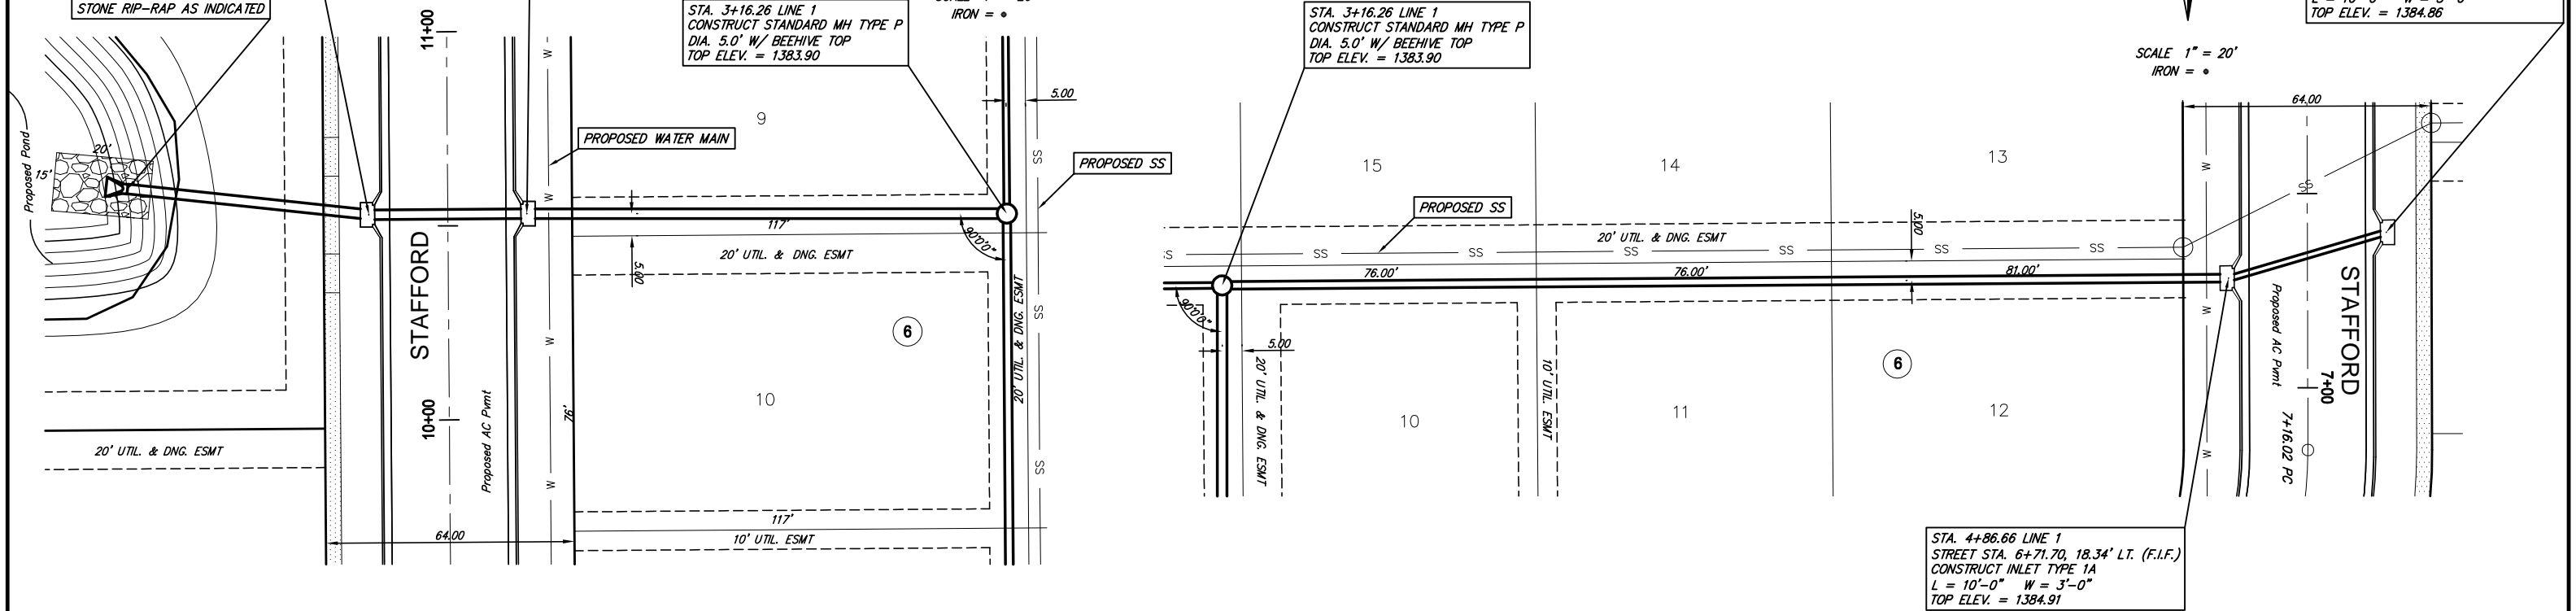

DESIGN	KWL	DRAWN	RLS	REVIEW	
PROJECT NUMBER		DATE	Sept. 21, 2005		
DRAWING FILE	storm sewer [swws].				
Storm Sewer Improvements SWS Line 1 WICHITA, KANSAS					
RB JOB	2738E	SHEET			
					11
					30