


B.M. 24 1/2 cross 100' in 100' post S.W. cor. Hydraulic & Mt. Vernon
 B.M. 103 1/2 14 in Mueller, 35 side fire hydrant, flange, N.W. cor. Hydraulic & Skinner
 B.M. 100 1/2 14 in Mueller, 35 side fire hydrant, flange, N.W. cor. Elise & Skinner

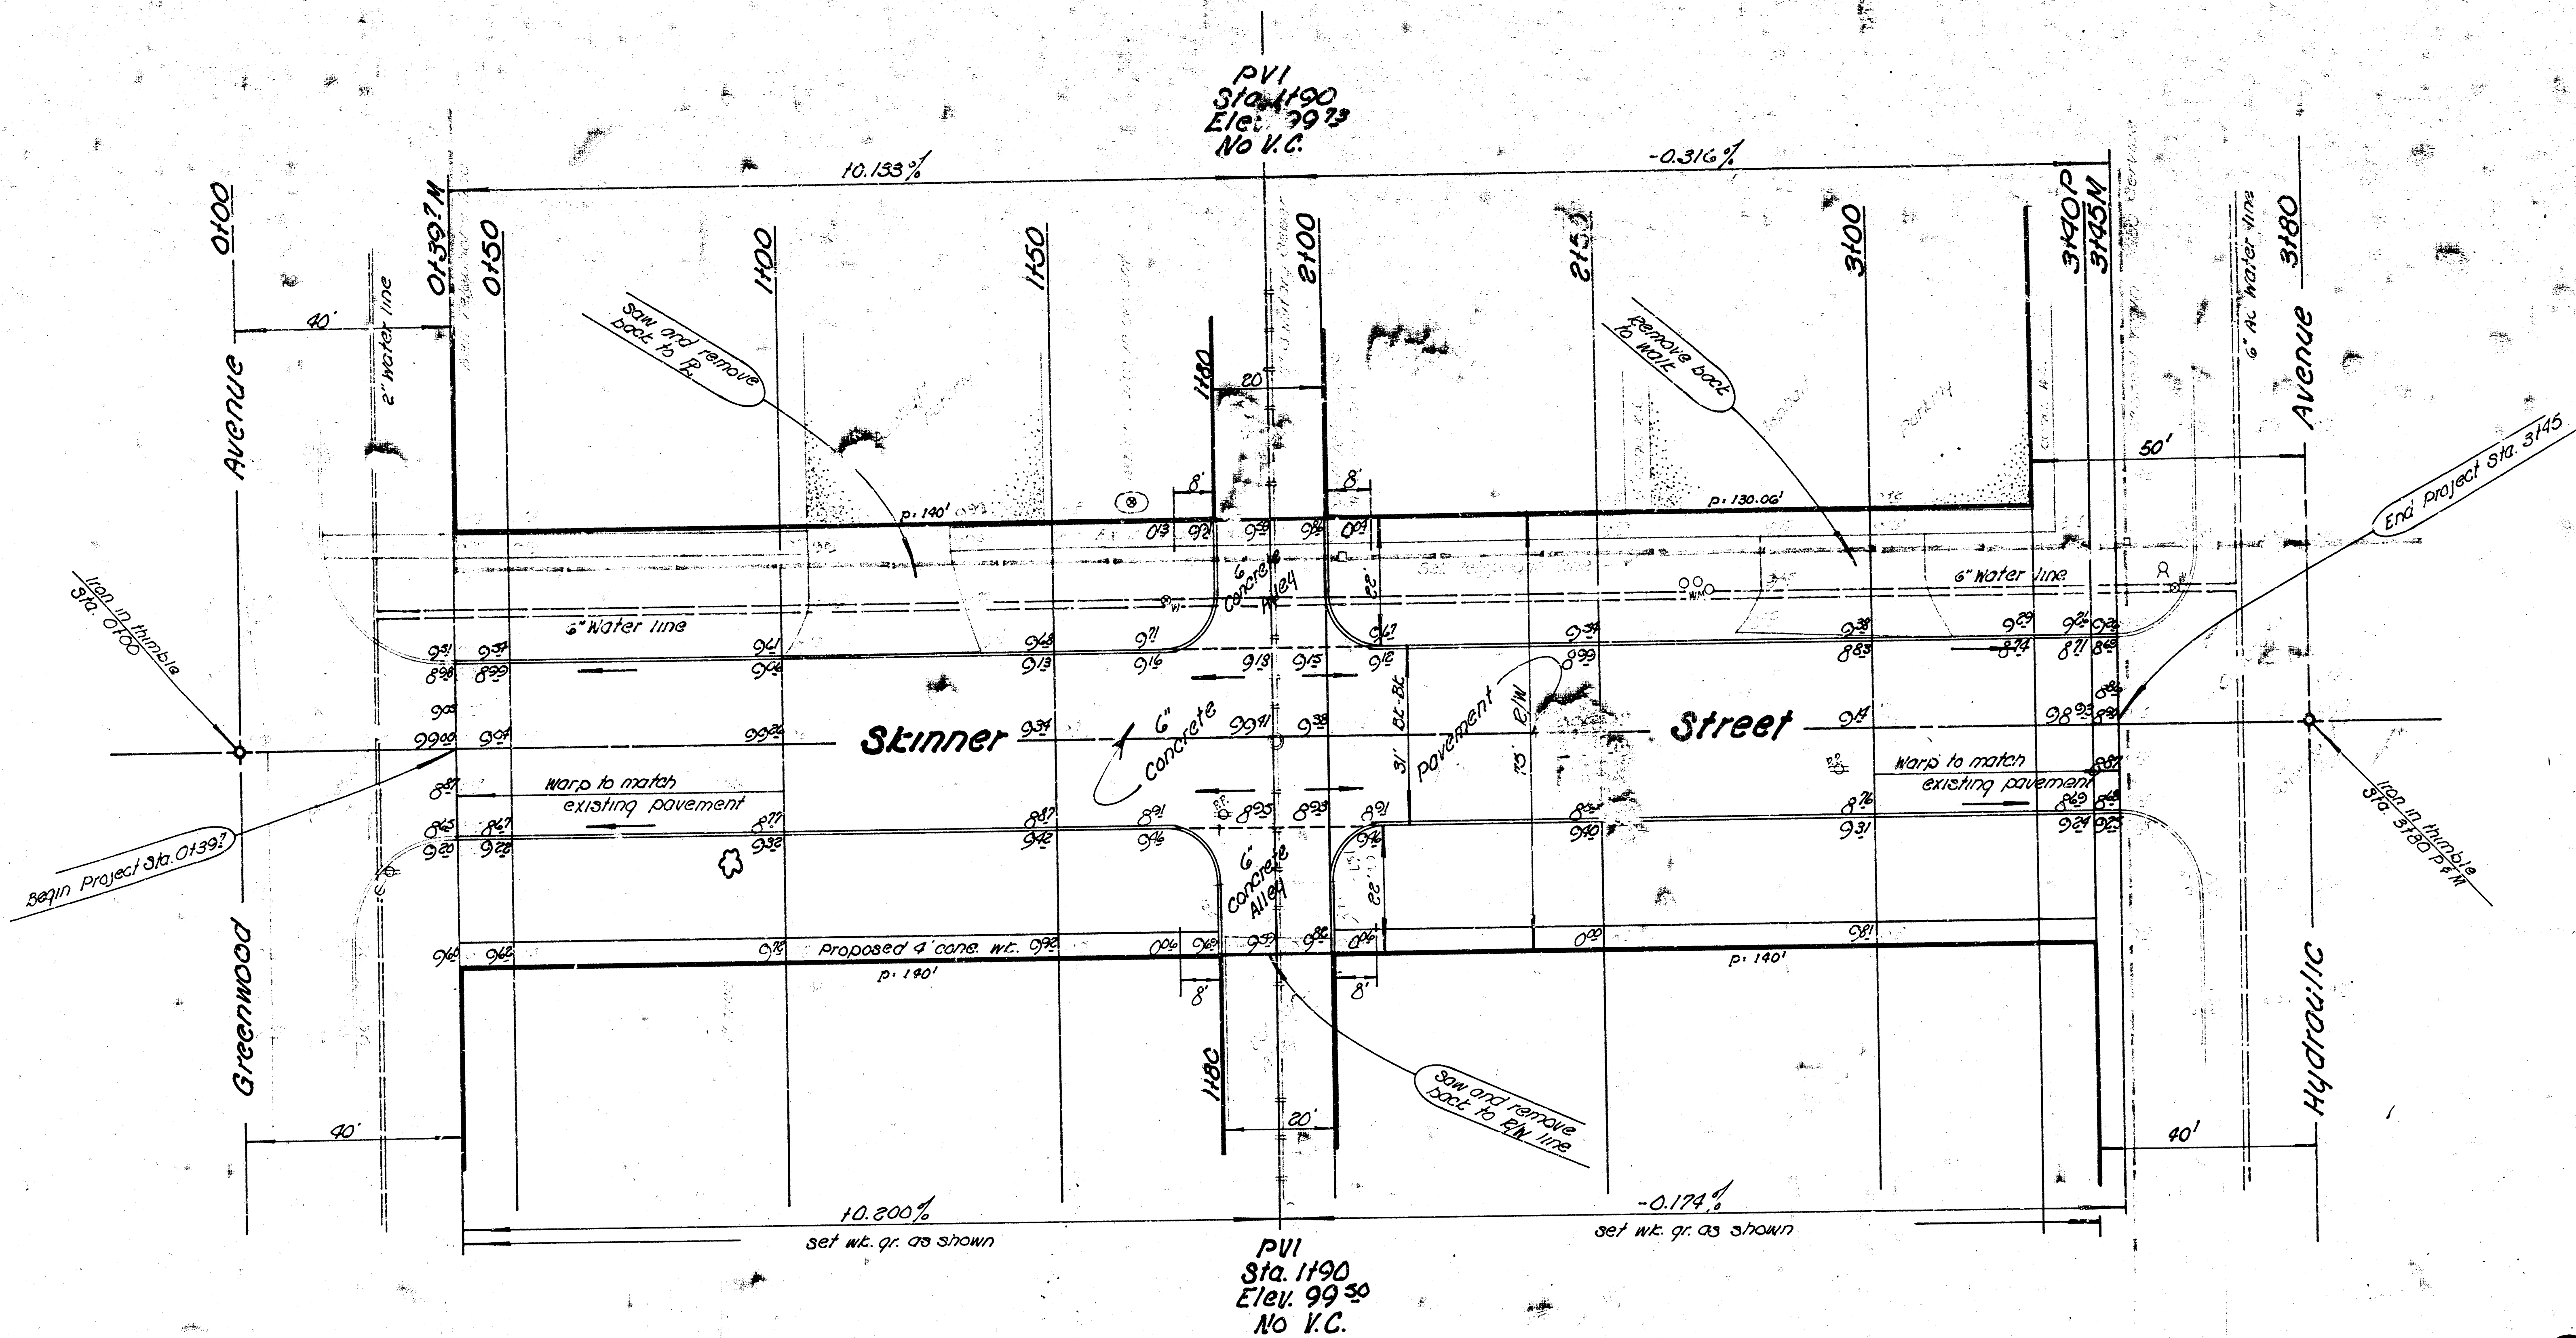

scale 1"=20'

★ General Notes ★

1. Contractor to clear right-of-way, grade parking and construct compact fill in sidewalk areas. Sidewalk to be constructed by others.
2. Sidewalk project has been initiated for North side of Skinner from Alley West of Hydraulic to Hydraulic.

Property		City	
Excavation	No comp. fill	Excavation	No comp. fill
361.3 cu yds		71.1 cu yds	
+10% 36.1 cu yds		+10% 7.1 cu yds	
Total 397.4 cu yds		Total 78.2 cu yds	

Skinner Street
 EL Greenwood to WL Hydraulic
 30' Concrete & curb
 City of Wichita, Kansas
 R.W. Linn City Engineer
 Date: FEB. 1974 Project No. DAKS57309

