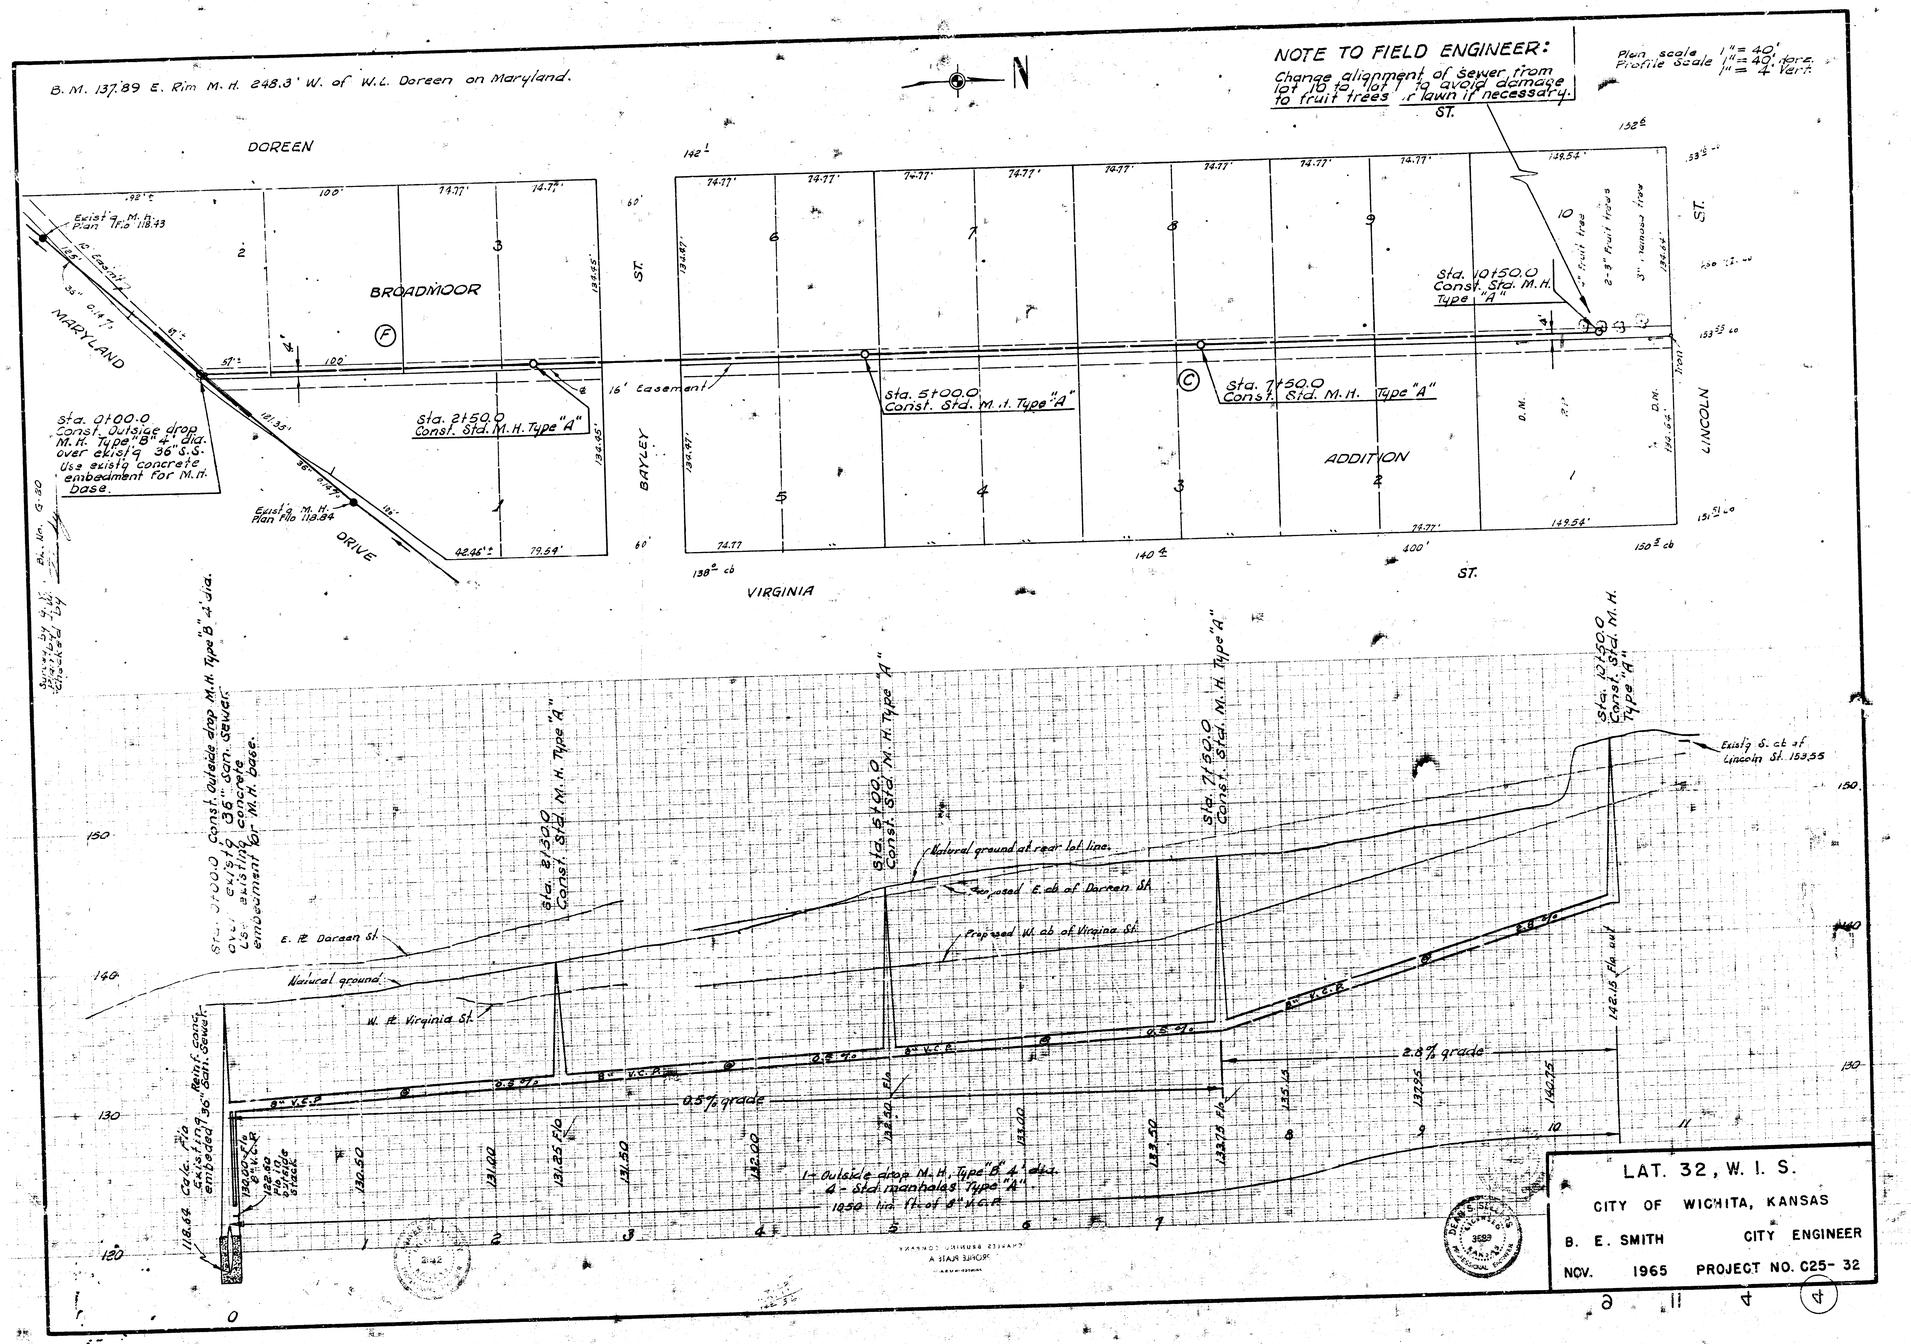

B. M. 137.89 E. Rim M. H. 248.3' W. of W.L. Doreen on Maryland.
NOTE TO FIELD ENGINEER:
Change alignment of sewer from lot 10 to lot 7 to avoid damage to fruit trees or lawn if necessary.
Plan scale 1" = 40'
Profile Scale 1" = 40' Horz. 1" = 4' Vert.
N
DOREEN
BROADMOOR
MARYLAND
DRIVE
BAYLEY
ST.
VIRGINIA
ST.
ADDITION
LINCOLN
ST.
Sta. 0+00.0 Const. Outside drop M.H. Type "B" 4' dia. over exist'g 36" S.S. Use exist'g concrete embedment for M.H. base.
Sta. 2+50.0 Const. Std. M.H. Type "A"
Sta. 5+00.0 Const. Std. M.H. Type "A"
Sta. 7+50.0 Const. Std. M.H. Type "A"
Sta. 10+50.0 Const. Std. M.H. Type "A"
16' Easement
Exist'g M.H. Plan Flo 118.43
Exist'g M.H. Plan Flo 118.84
Natural ground at rear lot line.
Proposed E. cb of Doreen St.
Proposed W. cb of Virginia St.
E. Pl. Doreen St.
Natural ground
W. Pl. Virginia St.
Exist'g S. cb of Lincoln St. 153.55
0.5% grade
2.8% grade
1 - Outside drop M.H. Type "B" 4' dia.
4 - Std. manholes Type "A"
1050 lin. ft. of 8" V.C.P.
LAT. 32, W. I. S.
CITY OF WICHITA, KANSAS
B. E. SMITH CITY ENGINEER
NOV. 1965 PROJECT NO. C25- 32