

PLANS
FOR


SANITARY SEWER EXTENSIONS

BEL AIRE PLAZA

AN ADDITION TO
BEL AIRE, SEDGWICK COUNTY, KANSAS

1983

SU 183

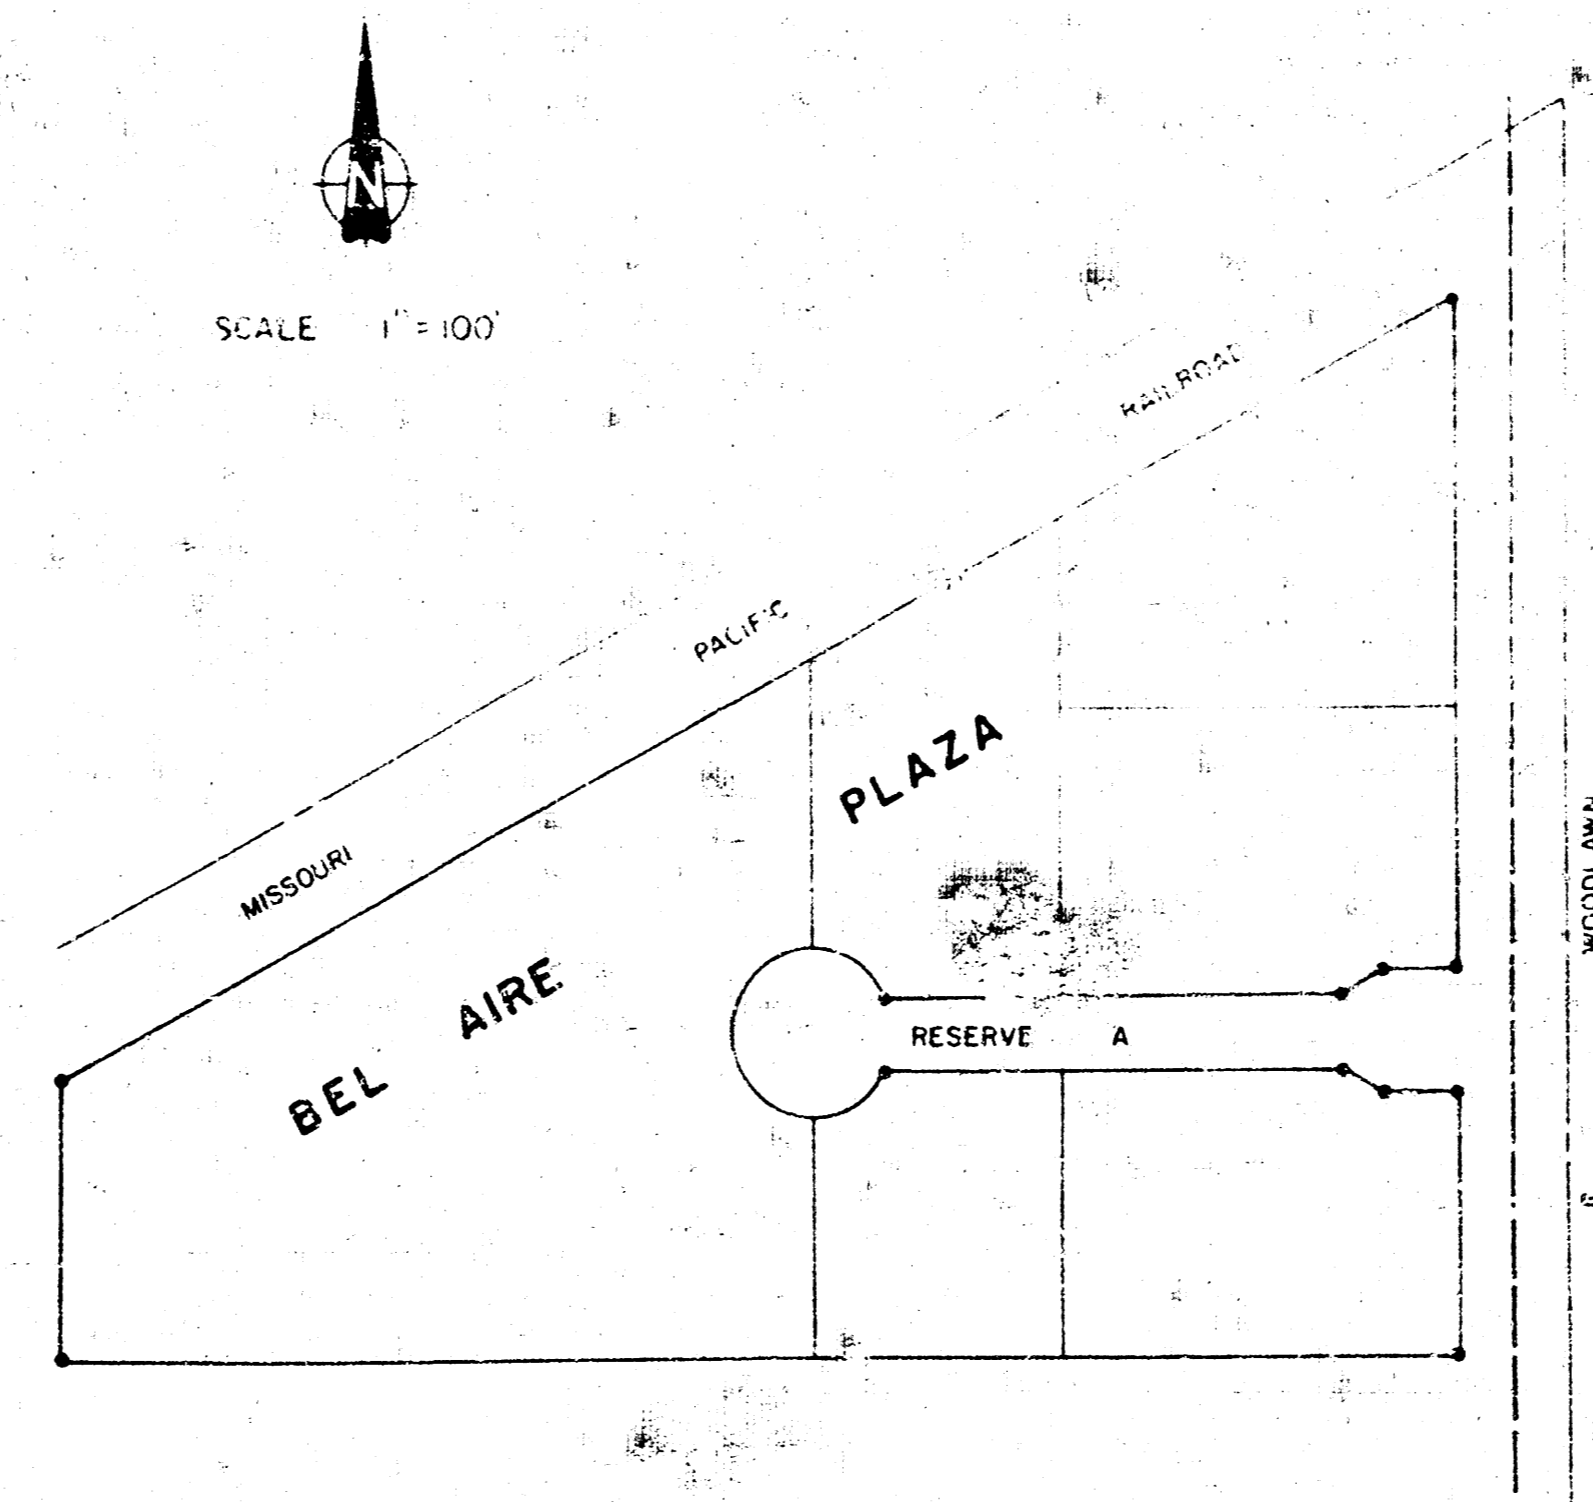


APPROVED AS NOTED
By CITY ENGINEER OF WICHITA
Sanitary Sewers *CLB 11/3/83*
Storm Sewers _____
Driveway Approaches _____

NOTE TO CONTRACTOR
This project will be constructed under the supervision of the CITY ENGINEER and conforming to the REGULATIONS of the CITY OF WICHITA. THE CONTRACTOR shall be responsible for the cost of the project.

REISS & GOODNESS ENGINEERS
2100 WEST 21ST STREET
WICHITA, KANSAS 67203
(316) 632-0233

REVISION	DRAWN BY	CHECKED BY	DESIGNED BY	PROJECT	CUSTOMER	SCALE GIVEN	PROJECT NO.
						DATE 10/83	SU 183
							SHEET 1 OF 7

FILMED FROM THE BEST AVAILABLE COPY....

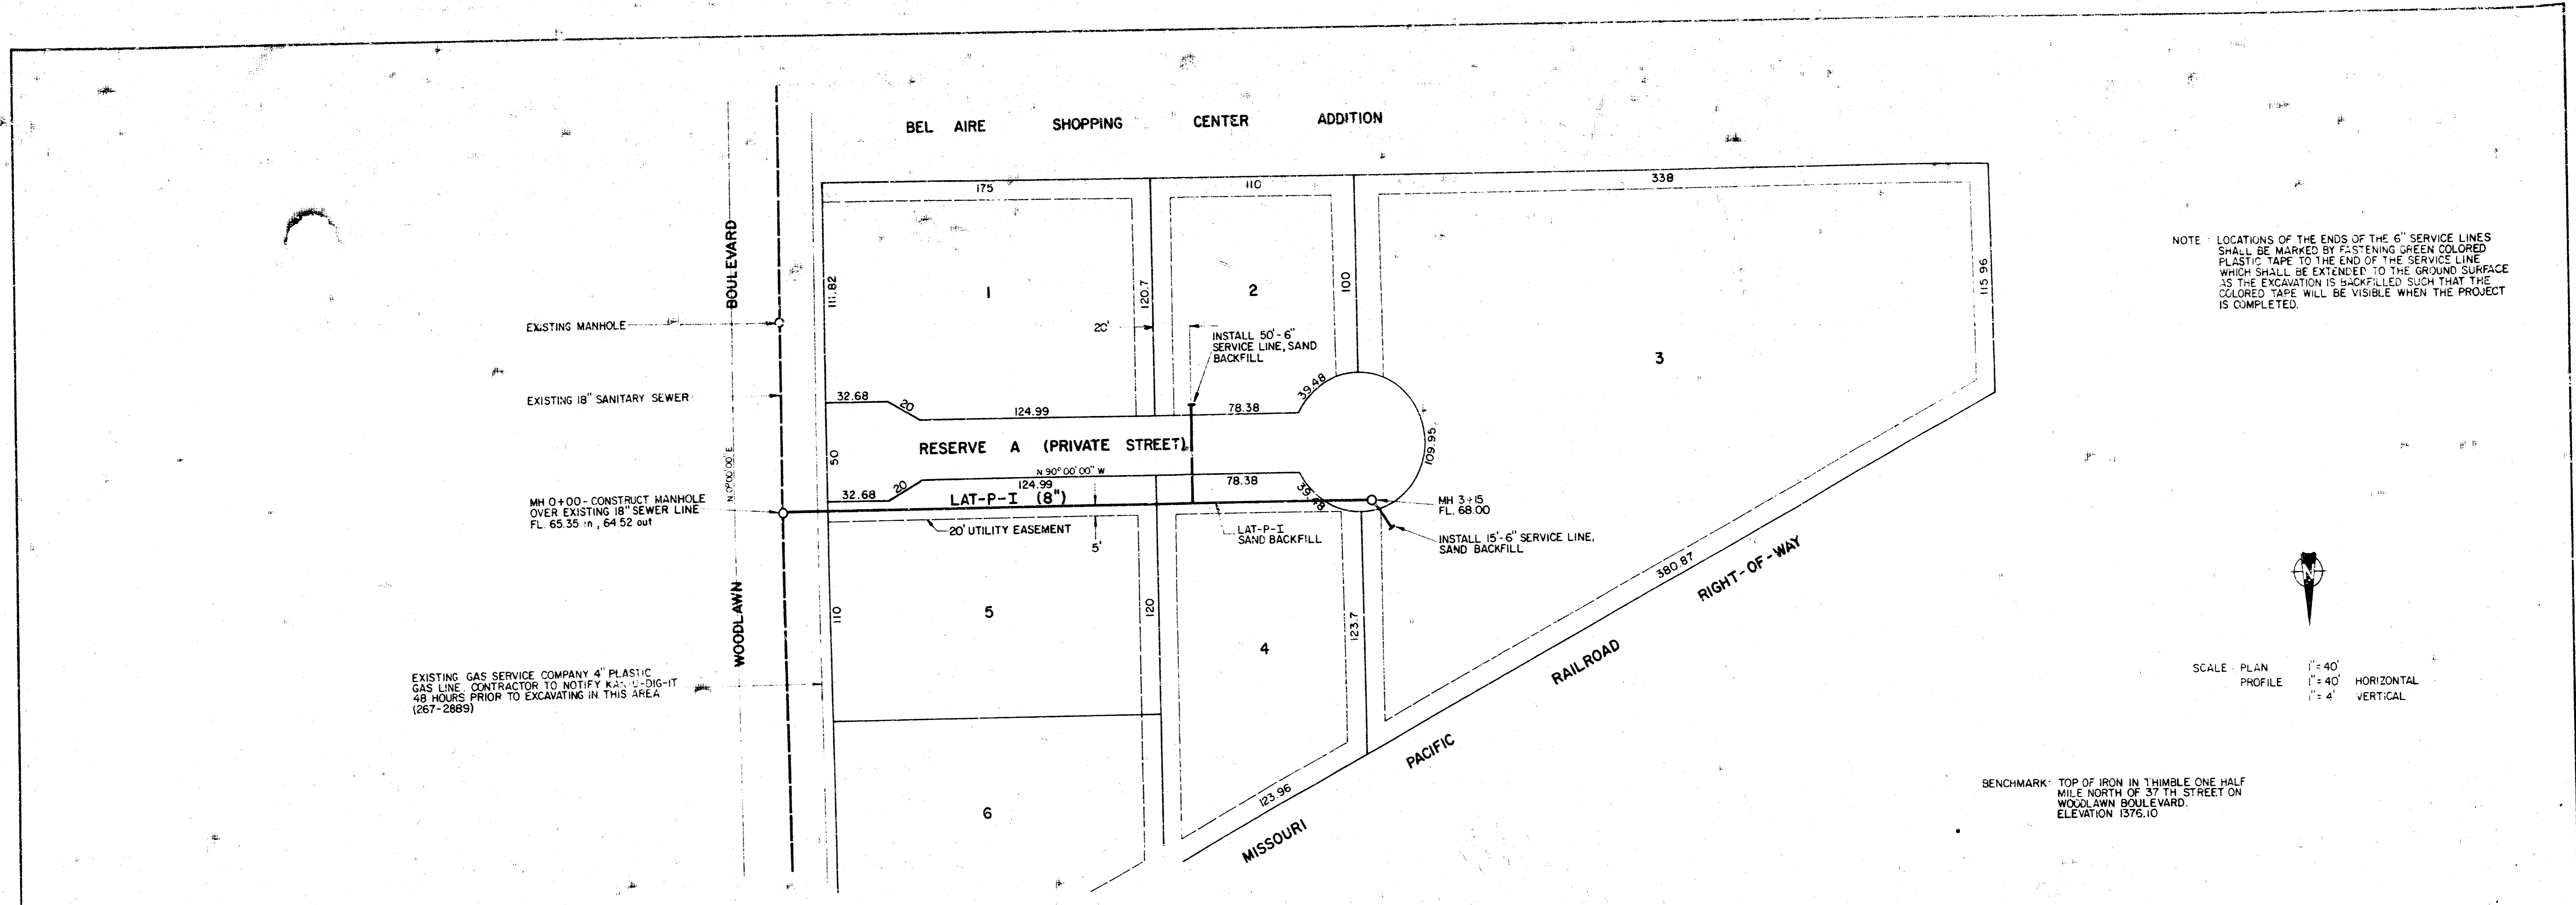


NOTE: LOCATIONS OF THE ENDS OF THE 6" SERVICE LINES SHALL BE MARKED BY FASTENING GREEN COLORED PLASTIC TAPE TO THE END OF THE SERVICE LINE WHICH SHALL BE EXTENDED TO THE GROUND SURFACE AS THE EXCAVATION IS BACKFILLED SUCH THAT THE COLORED TAPE WILL BE VISIBLE WHEN THE PROJECT IS COMPLETED.



SCALE: PLAN 1" = 40'
 PROFILE 1" = 4' HORIZONTAL
 1" = 4' VERTICAL

BENCHMARK: TOP OF IRON IN THIMBLE ONE HALF MILE NORTH OF 37 TH STREET ON WOODLAWN BOULEVARD. ELEVATION 1375.10

LAT-P-I
 ALL PIPE IS 8"

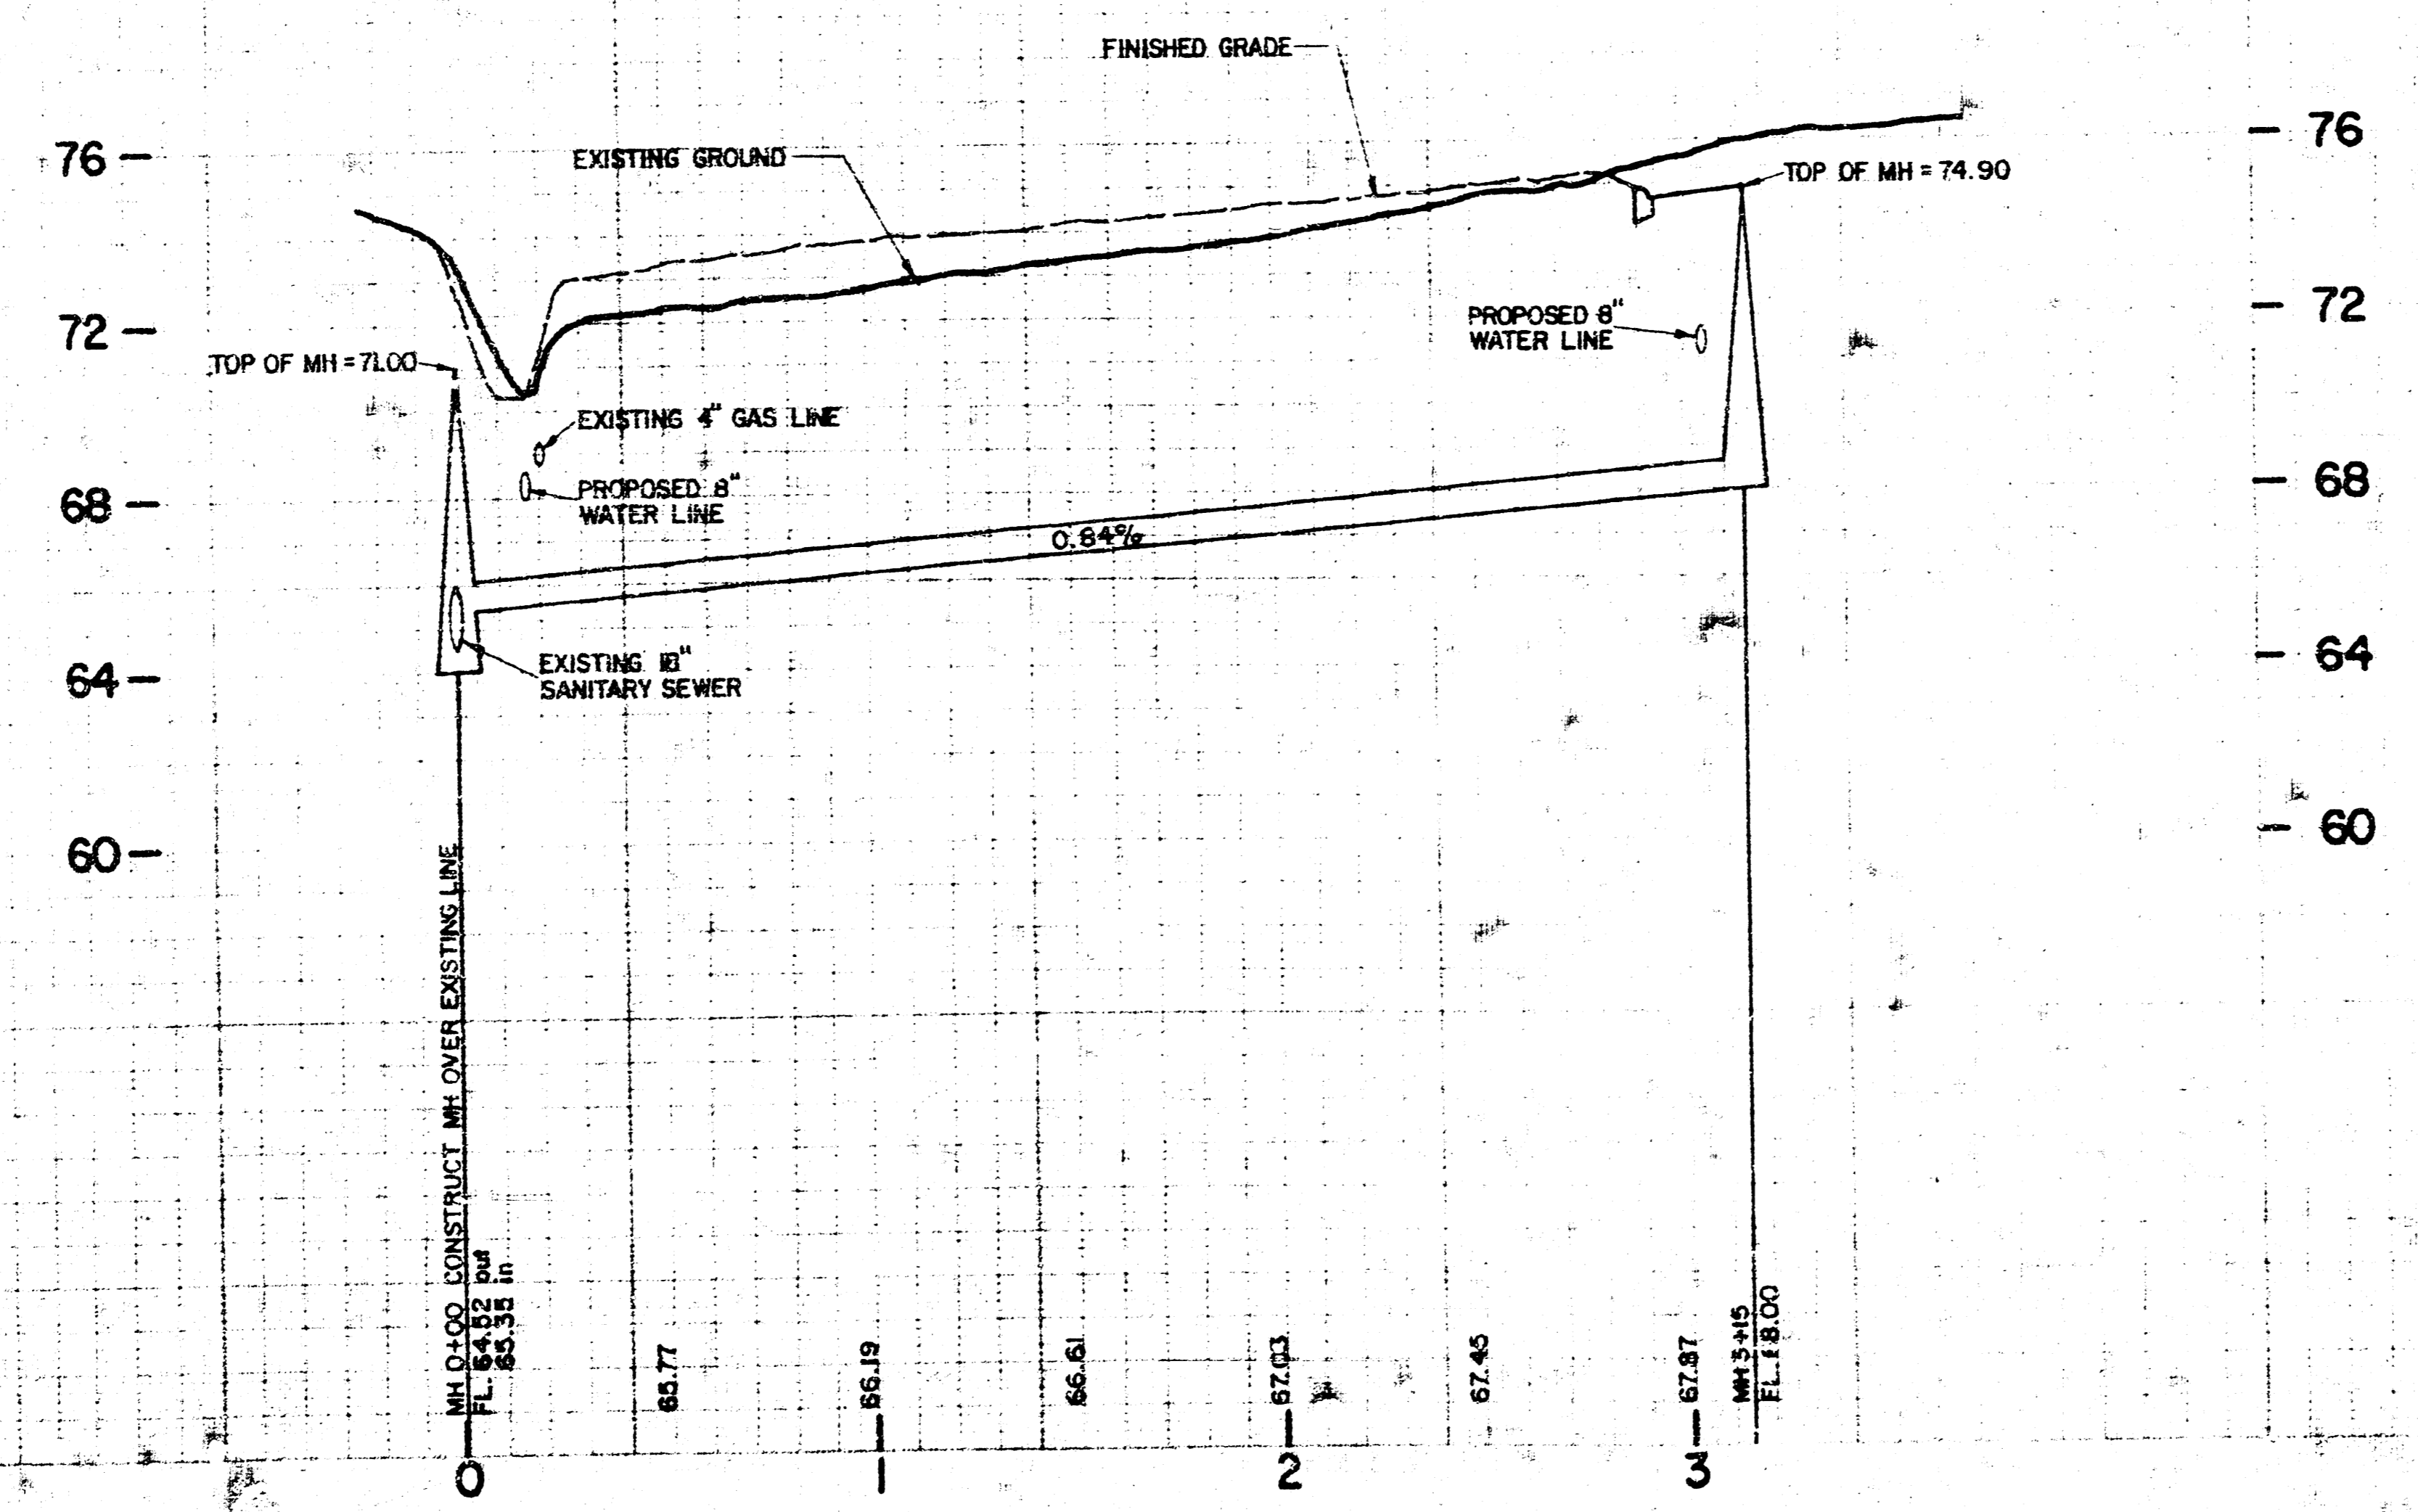

DEISS & GOODNESS ENGINEERS
 2100 WEST 21ST AVENUE
 WICHITA, KANSAS 67204
 (316) 822-0210

FILMED FROM THE BEST


SEWER APPURTENANCES DETAILS

ADOPTED AS STANDARD DESIGN


BY

City of Wichita, Kansas


DETAIL OF OUTSIDE DROP
CONSTRUCTED ON EXISTING MANHOLE

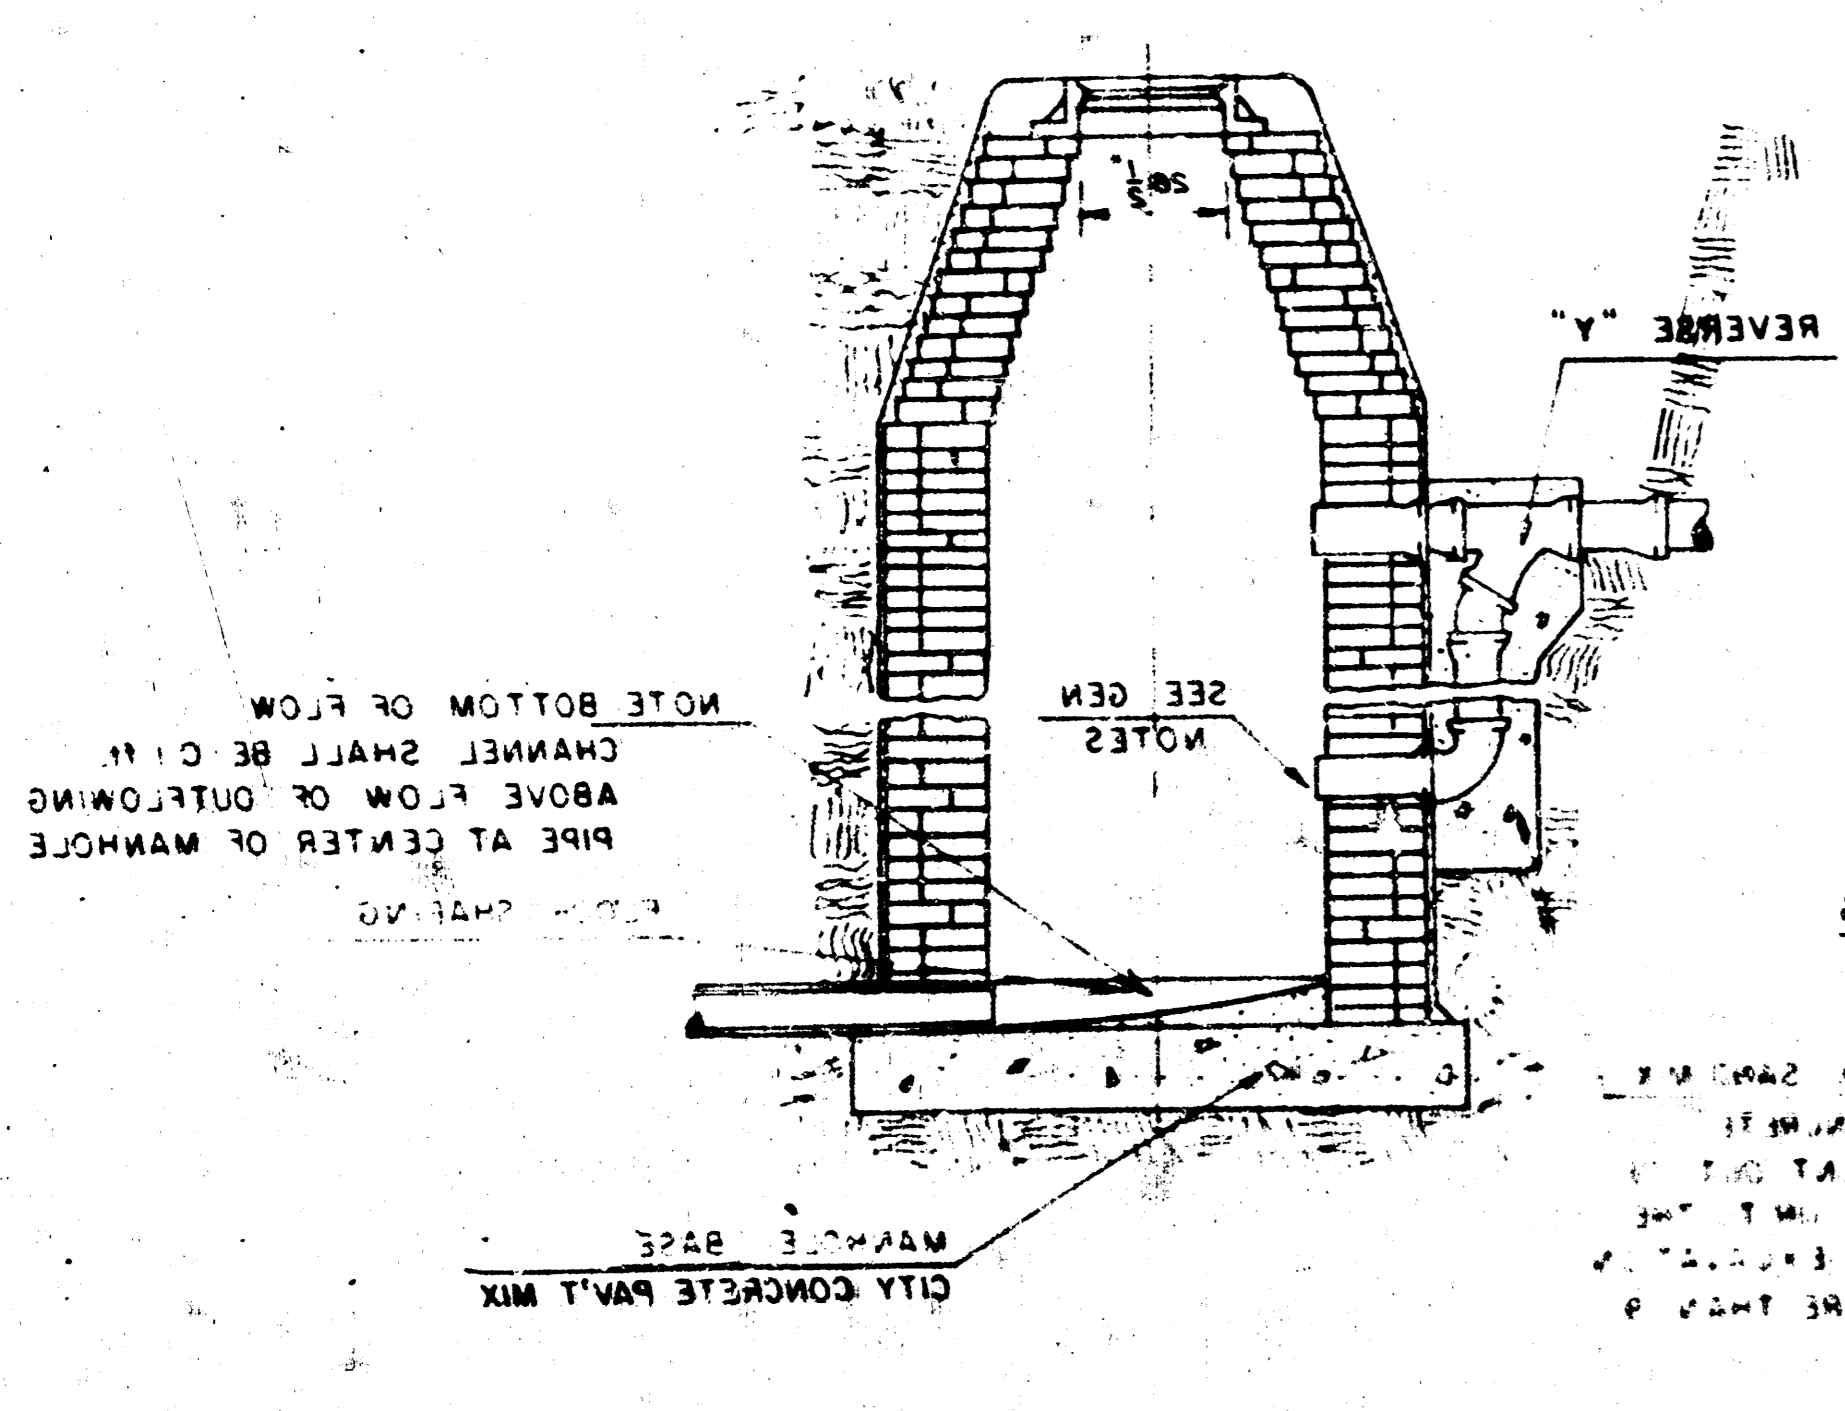


TYPE "B" OUTSIDE DROP MANHOLE

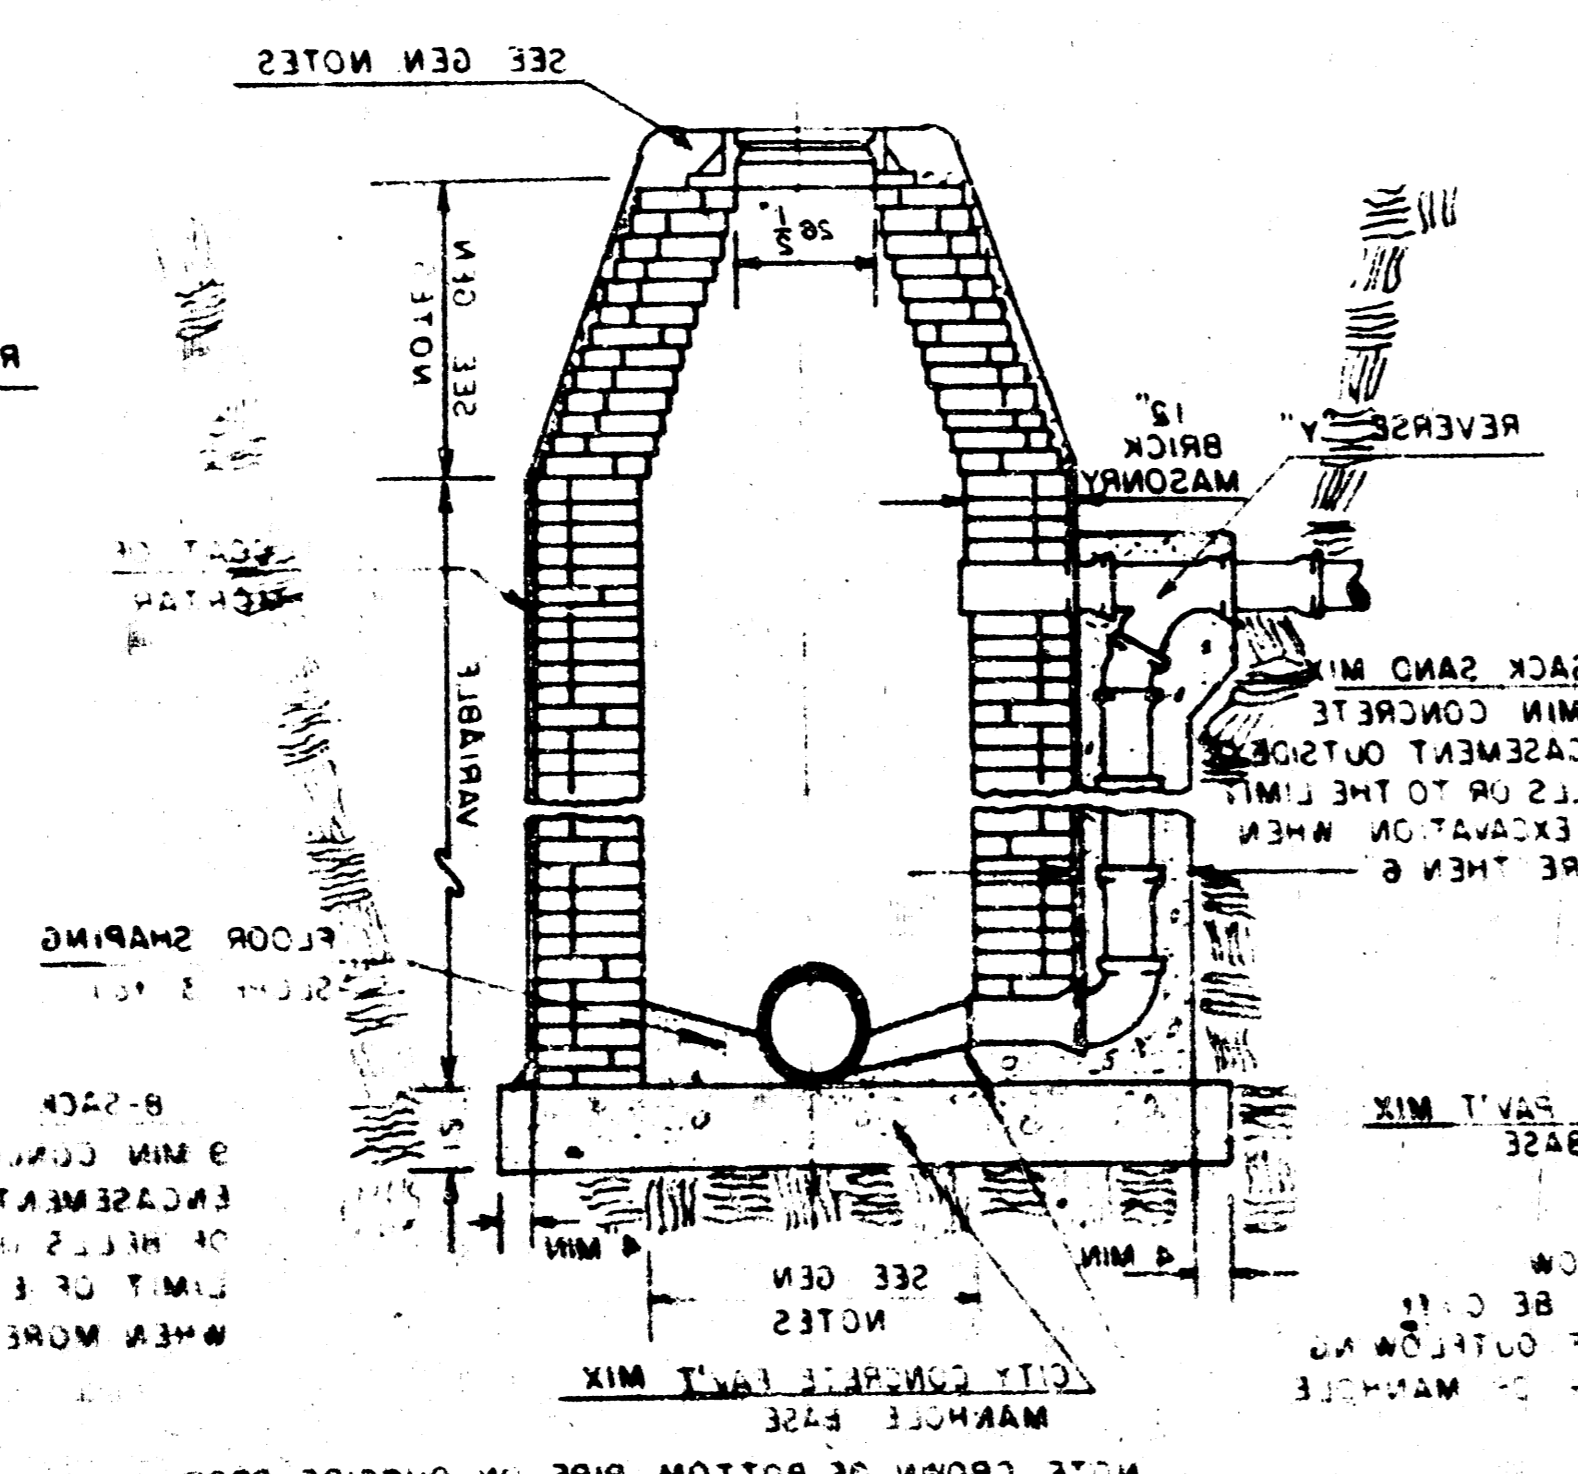

TYPE "B" INSIDE DROP MANHOLE

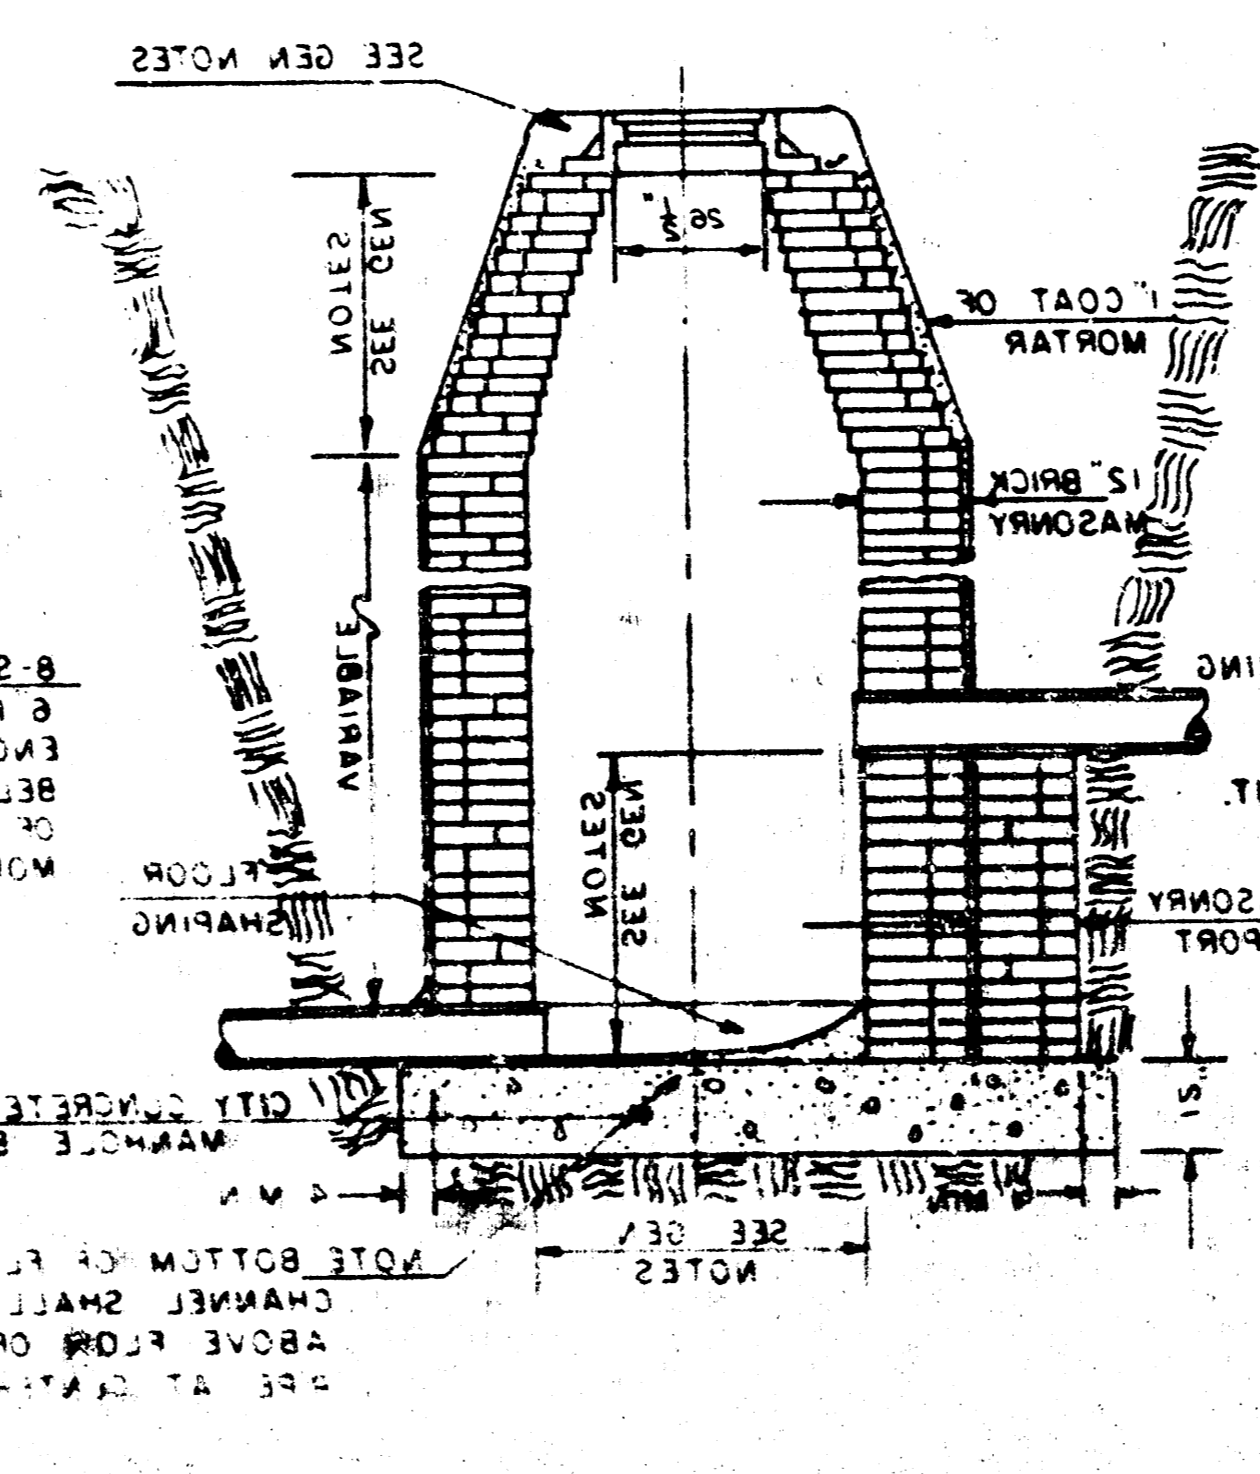

TYPE "B" MANHOLE

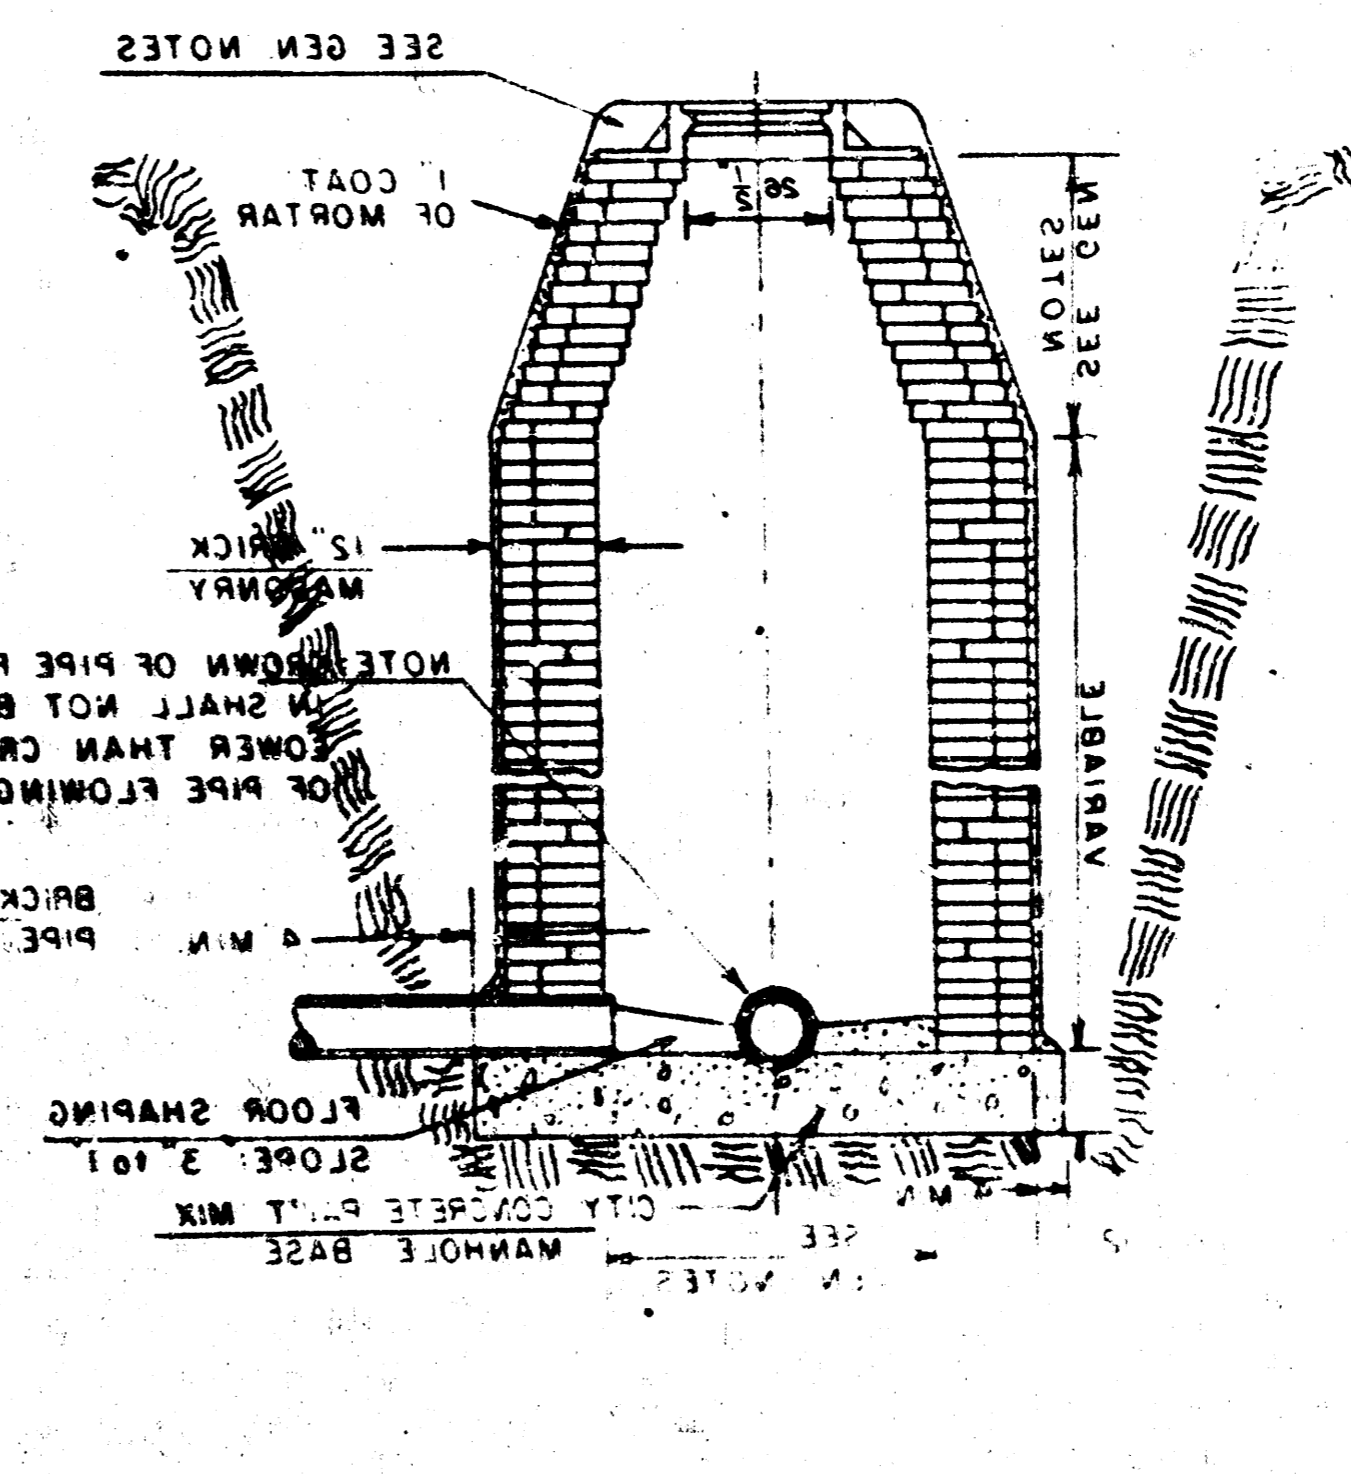




GENERAL NOTES

1. THE FLOOR OF ALL MANHOLES SHALL BE FINISHED WITH 1/2\"/>
2. THE MANHOLE SHALL BE FINISHED WITH 1/2\"/>
3. THE MANHOLE SHALL BE FINISHED WITH 1/2\"/>
4. THE MANHOLE SHALL BE FINISHED WITH 1/2\"/>
5. THE MANHOLE SHALL BE FINISHED WITH 1/2\"/>
6. THE MANHOLE SHALL BE FINISHED WITH 1/2\"/>
7. THE MANHOLE SHALL BE FINISHED WITH 1/2\"/>
8. THE MANHOLE SHALL BE FINISHED WITH 1/2\"/>

SEWER APPURTENANCES DETAILS

ADOPTED AS STANDARD DESIGN
BY

City of Wichita, Kansas

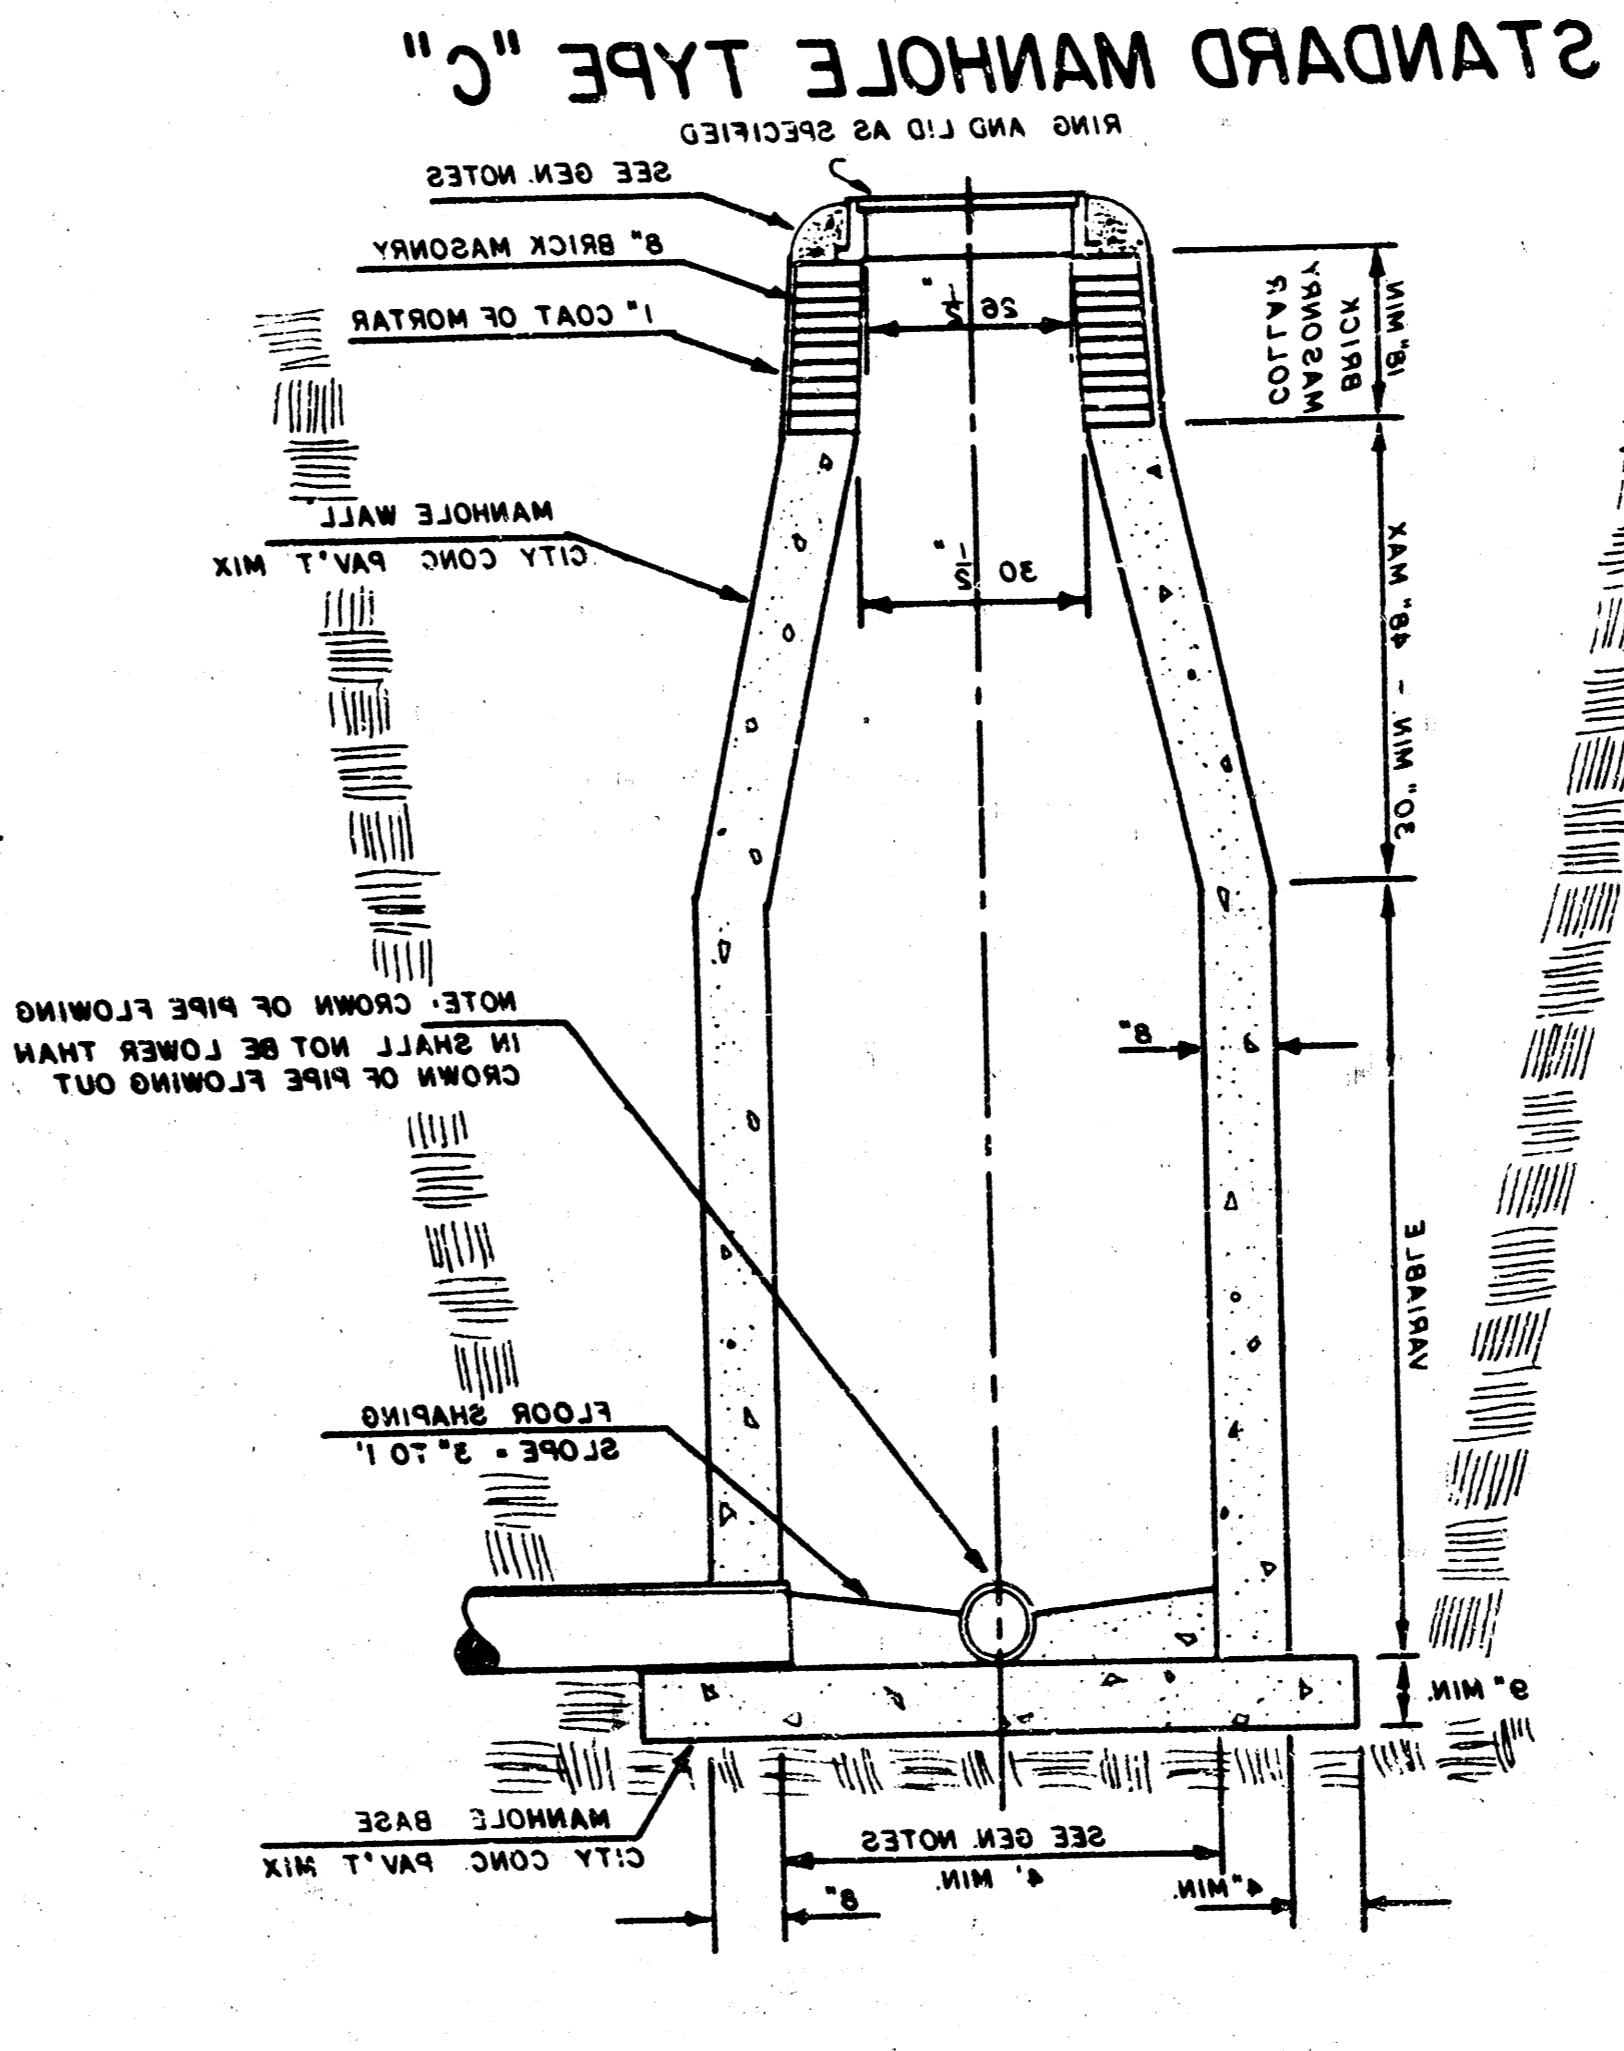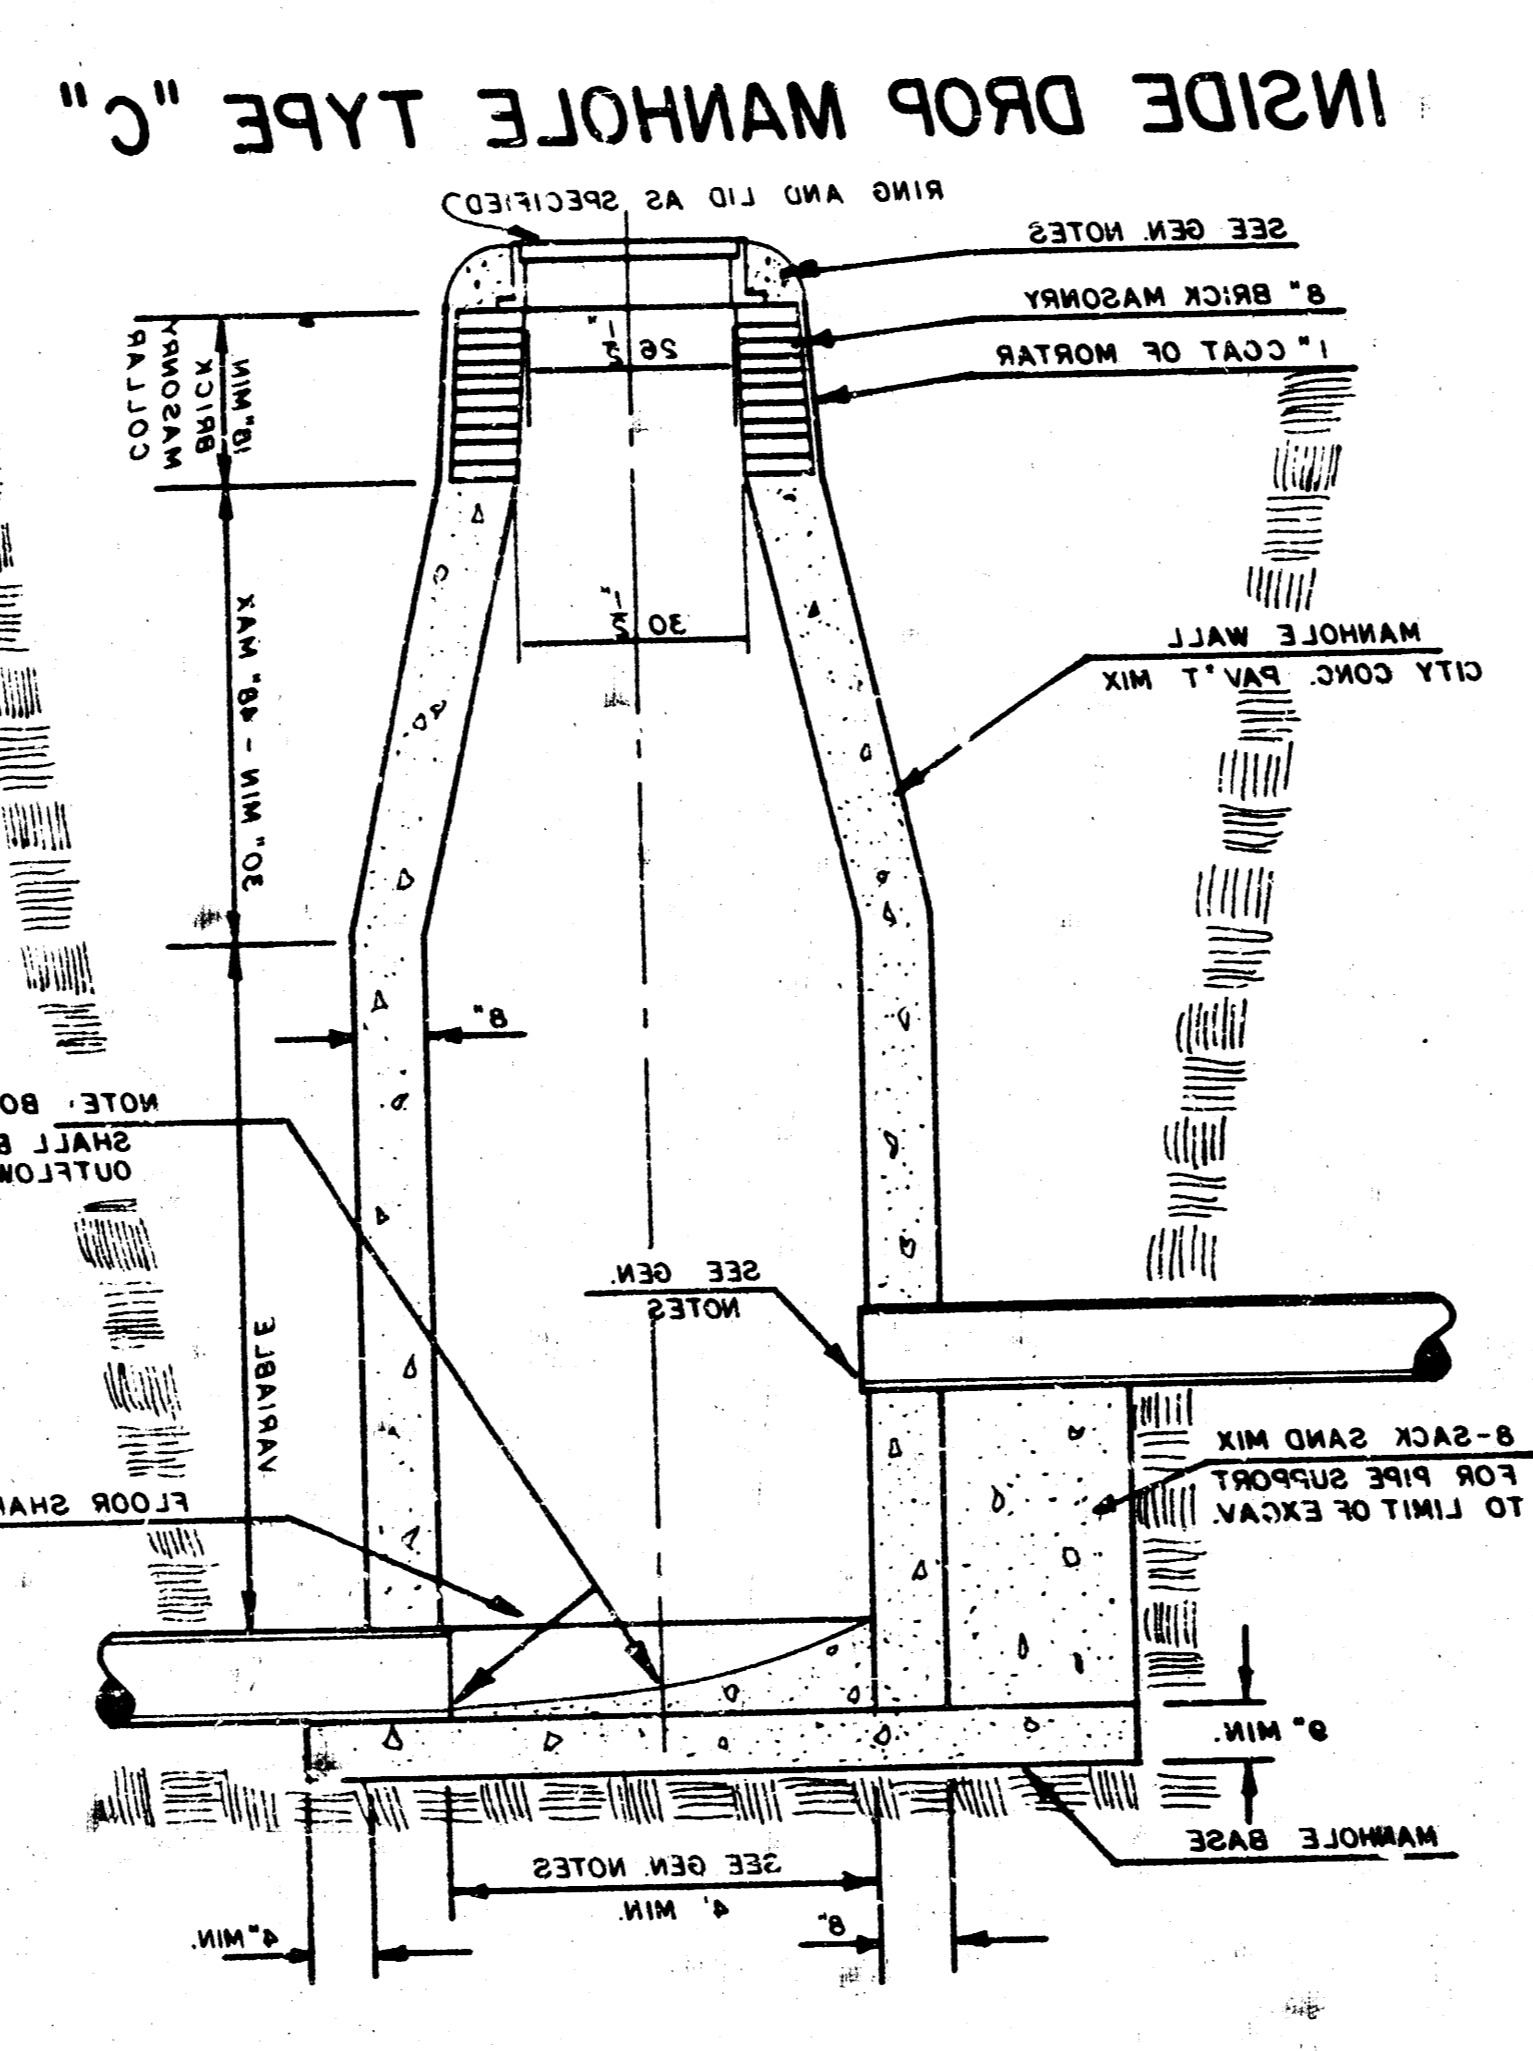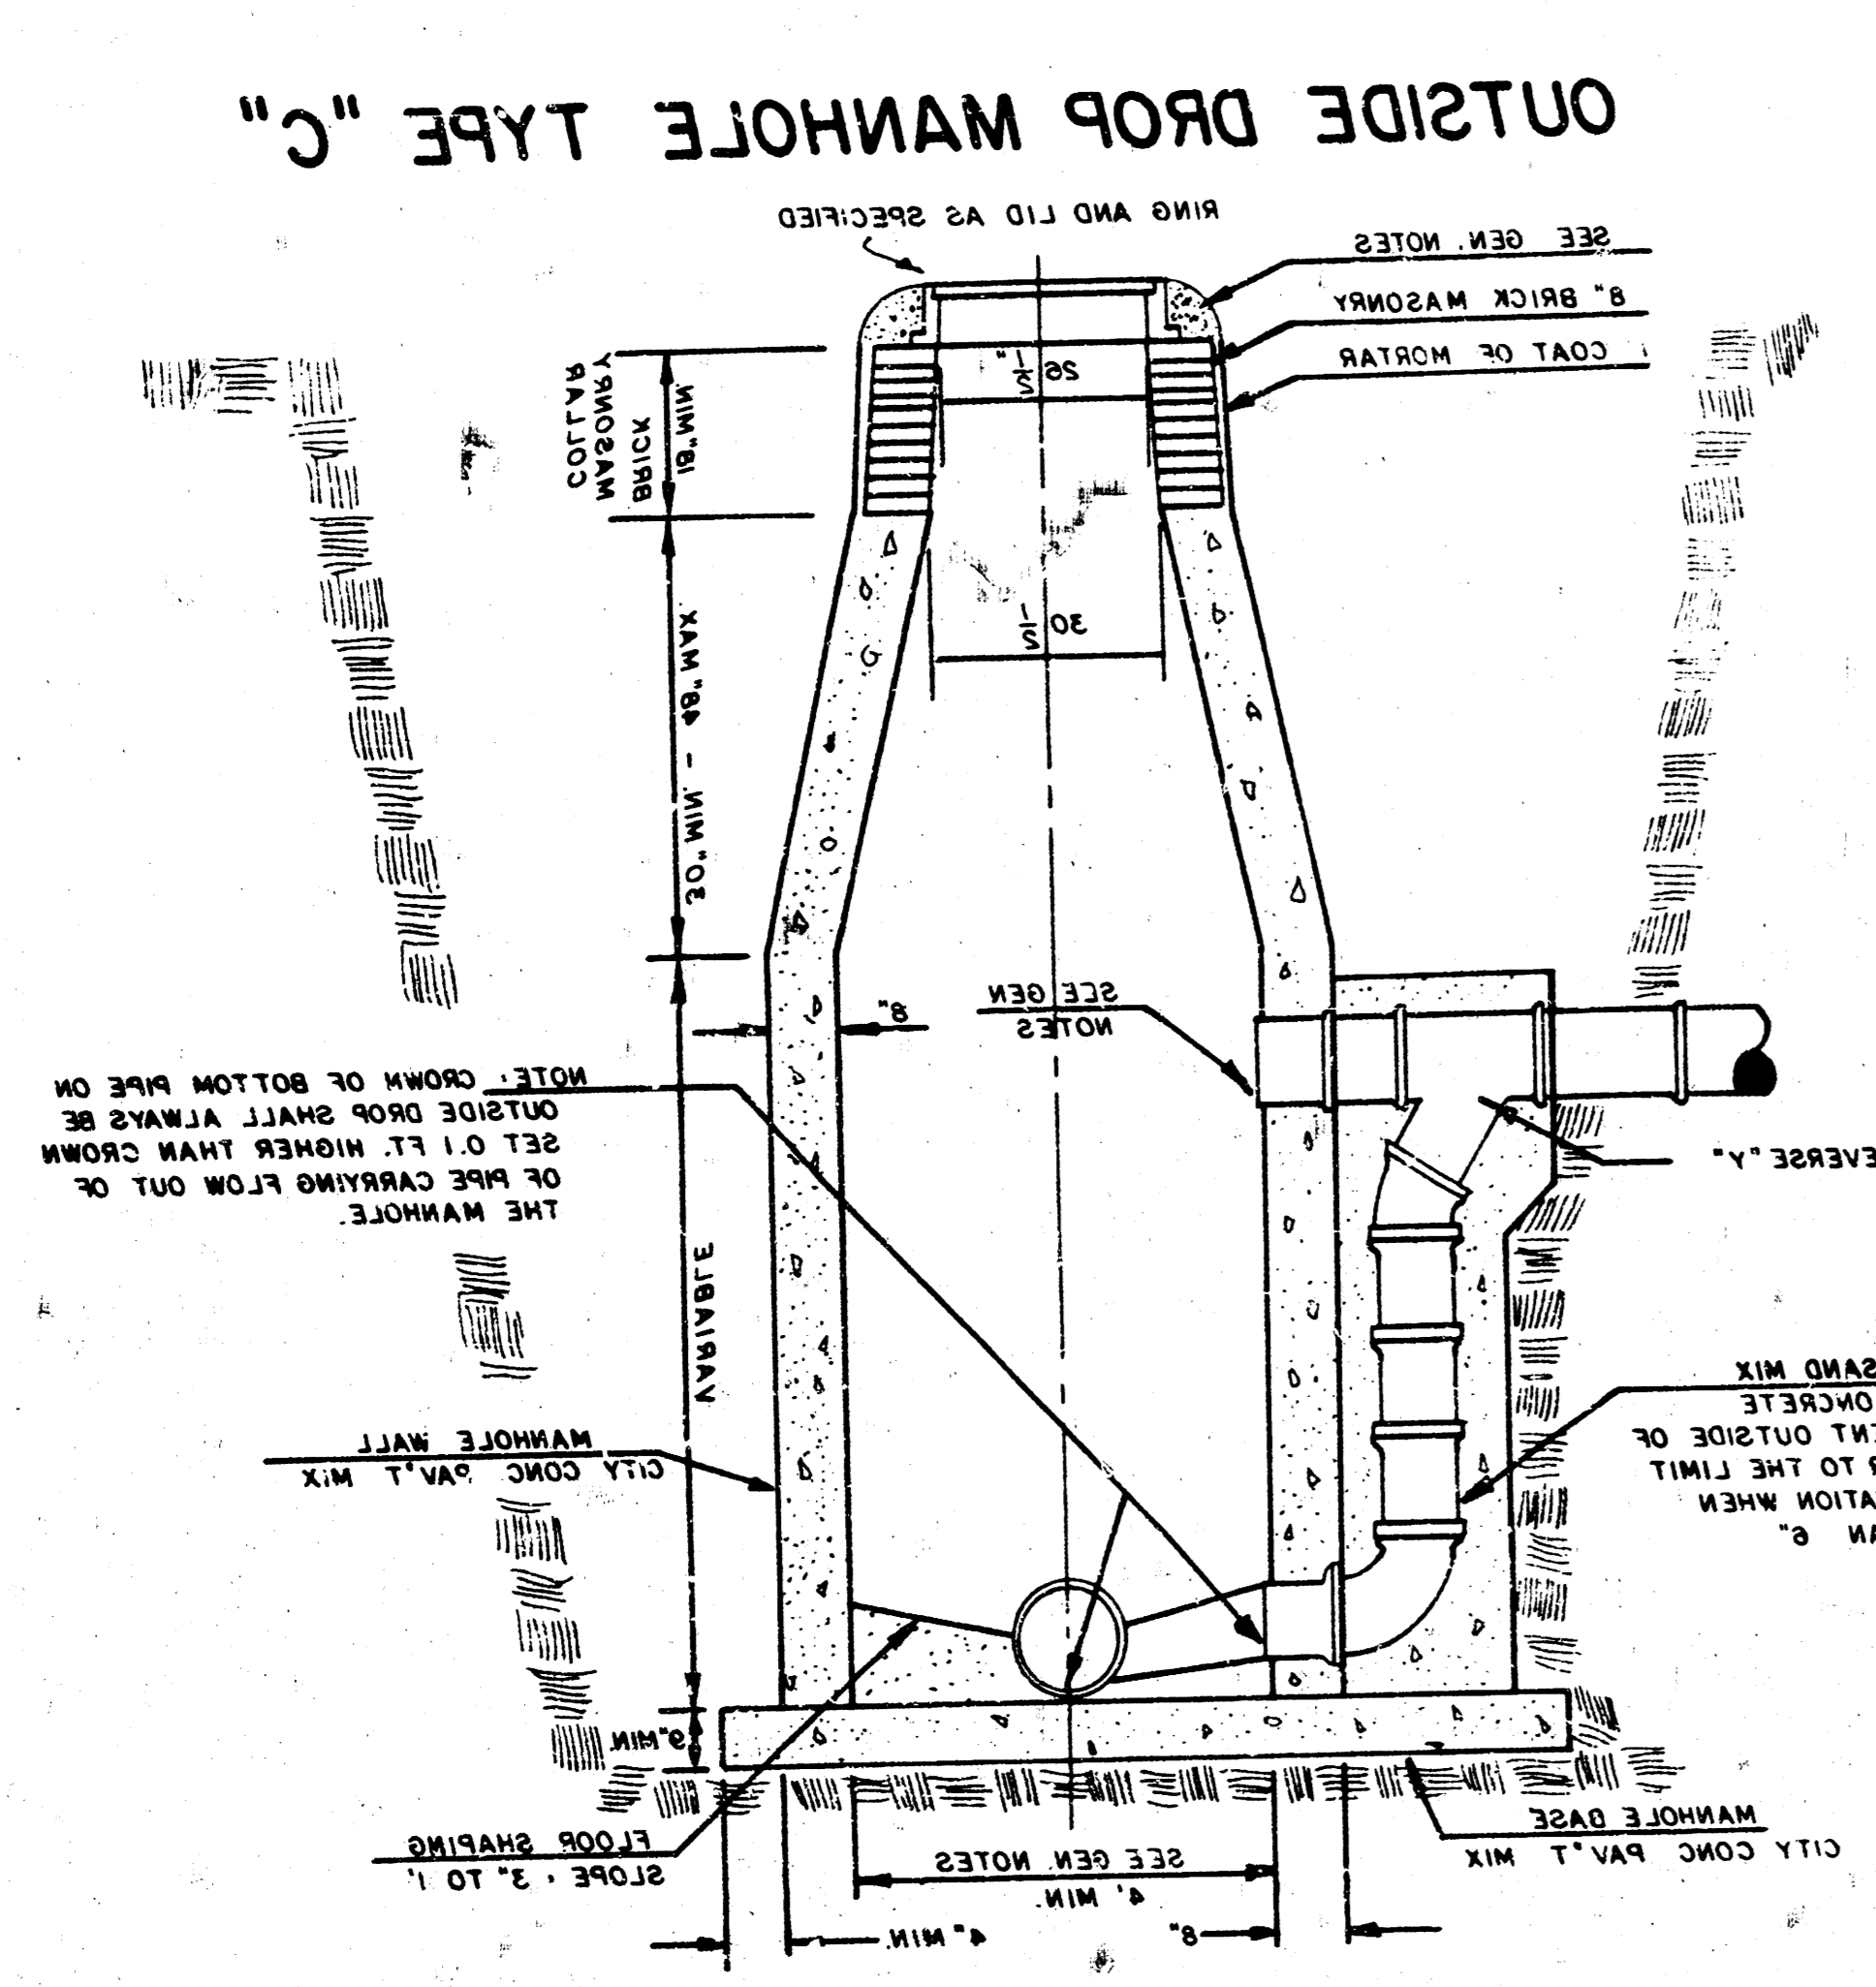


- GENERAL NOTES**
- MORTAR USED IN MASONRY CONSTRUCTION SHALL CONTAIN 8 SACKS OF CEMENT PER CUBIC YARD. CONCRETE USED IN MANHOLE WALLS AND BASES SHALL CONFORM TO THE REQUIREMENTS OF CONCRETE PAVEMENT CONSTRUCTION AS SPECIFIED IN THE CITY STANDARD SPECIFICATIONS USING CITY CONCRETE PAVEMENT MIX WITHOUT AIR EXTRACTING MIXTURE. WORKMANSHIP SHALL BE PLACED AROUND THE MANHOLE RING AS SHOWN ON THE DRAWING. WHEN MANHOLES ARE CONSTRUCTED IN UNPAVED AREAS, TYPE "C" MANHOLES CAN BE CONSTRUCTED ONLY WHERE PIPE SIZES ARE 8" OR SMALLER. THE INSIDE DIAMETER OF TYPE "C" MANHOLES SHALL BE 4' COMPLETE MANHOLE SHALL BE WITHOUT LEAKS AND WATER TIGHT.
 - REINFORCING STEEL SHALL BE INSTALLED IN THE MANHOLE BASE. REINFORCING STEEL SHALL CONSIST OF NO. 4 BARS PLACED ON 6" CENTERS IN BOTH DIRECTIONS. REINFORCING STEEL SHALL BE PLACED ABOVE THE BOTTOM OF THE MANHOLE BASE. COST OF FINISHING AND INSTALLING REINFORCING STEEL SHALL BE INCLUDED IN THE UNIT PRICE BID FOR THE MANHOLE.
 - AN OPENING SHALL BE CUT IN THE MANHOLE WALL FOR THE UPPER INLET PIPE FOR INSIDE AND OUTSIDE DROP MANHOLES. THE UPPER INLET PIPE SHALL BE ROUNDED INTO THIS OPENING WITH NON-SHARP EDGES. THE EXTERIOR OF THIS COMPLETED CONNECTION SHALL BE SEALED WITH AN APPROVED BITUMINOUS COATING SUCH THAT THE CONNECTION WILL BE WATER TIGHT.
 - THE FLOORS OF ALL MANHOLES SHALL BE SHAPED WITH FLOW CHANNELS SUCH THAT THE MANHOLES WILL BE SELF-CLEANING AND FREE OF WEARS WHERE SOLIDS COULD BE DEPOSITED AS SEWAGE FLOWS THROUGH THE MANHOLE FROM ALL INLET PIPES TO THE OUTLET PIPES. FLOW CHANNELS SHALL BE FORMED TO MATCH THE BOTTOM WAVES OF THE INLET PIPES AND THE OUTGOING PIPE AS SHOWN BY THE DRAWINGS EXCEPT FOR INSIDE DROP MANHOLES. FLOW CHANNELS FOR INSIDE DROP MANHOLES SHALL BE CONSTRUCTED AS INDICATED BY THE DRAWING. MANHOLE FLOORS SHALL BE CONSTRUCTED AS INDICATED BY THE DRAWING.
 - MANHOLE COVER CASTINGS AND MANHOLE FRAME CASTINGS SHALL CONFORM TO THE REQUIREMENTS AS INDICATED IN THE STANDARD SPECIFICATIONS AND AS SHOWN IN THE STANDARD DETAIL DRAWING.
 - THE VERTICAL DROP IN INSIDE DROP MANHOLES SHALL NOT EXCEED 4' FOR INLET PIPES SIZED 12" OR SMALLER AND 5' FOR INLET PIPES SIZED LARGER THAN 12". THE CROWN OF INLET PIPES SHALL NEVER BE SET LOWER THAN THE CROWN OF THE OUTGOING PIPE.
 - STANDARD MANHOLES TYPE "C" AND STANDARD INSIDE DROP MANHOLES TYPE "C" SHALL BE BID AS STANDARD MANHOLES FOR THE TYPE AS DIAMETER INDICATED. OUTSIDE DROP MANHOLES TYPE "C" SHALL BE BID AS STANDARD OUTSIDE DROP MANHOLES FOR THE TYPE AND DIAMETER INDICATED. MANHOLE DIAMETERS WILL BE 4' UNLESS INDICATED OTHERWISE.

CITY OF WICHITA, KANSAS BY ADOPTED AS STANDARD DESIGN SEWER APPURTENANCES DETAILS

TYPE "D" OUTSIDE DROP MANHOLE

TYPE "D" INSIDE DROP MANHOLE

TYPE "D" MANHOLE

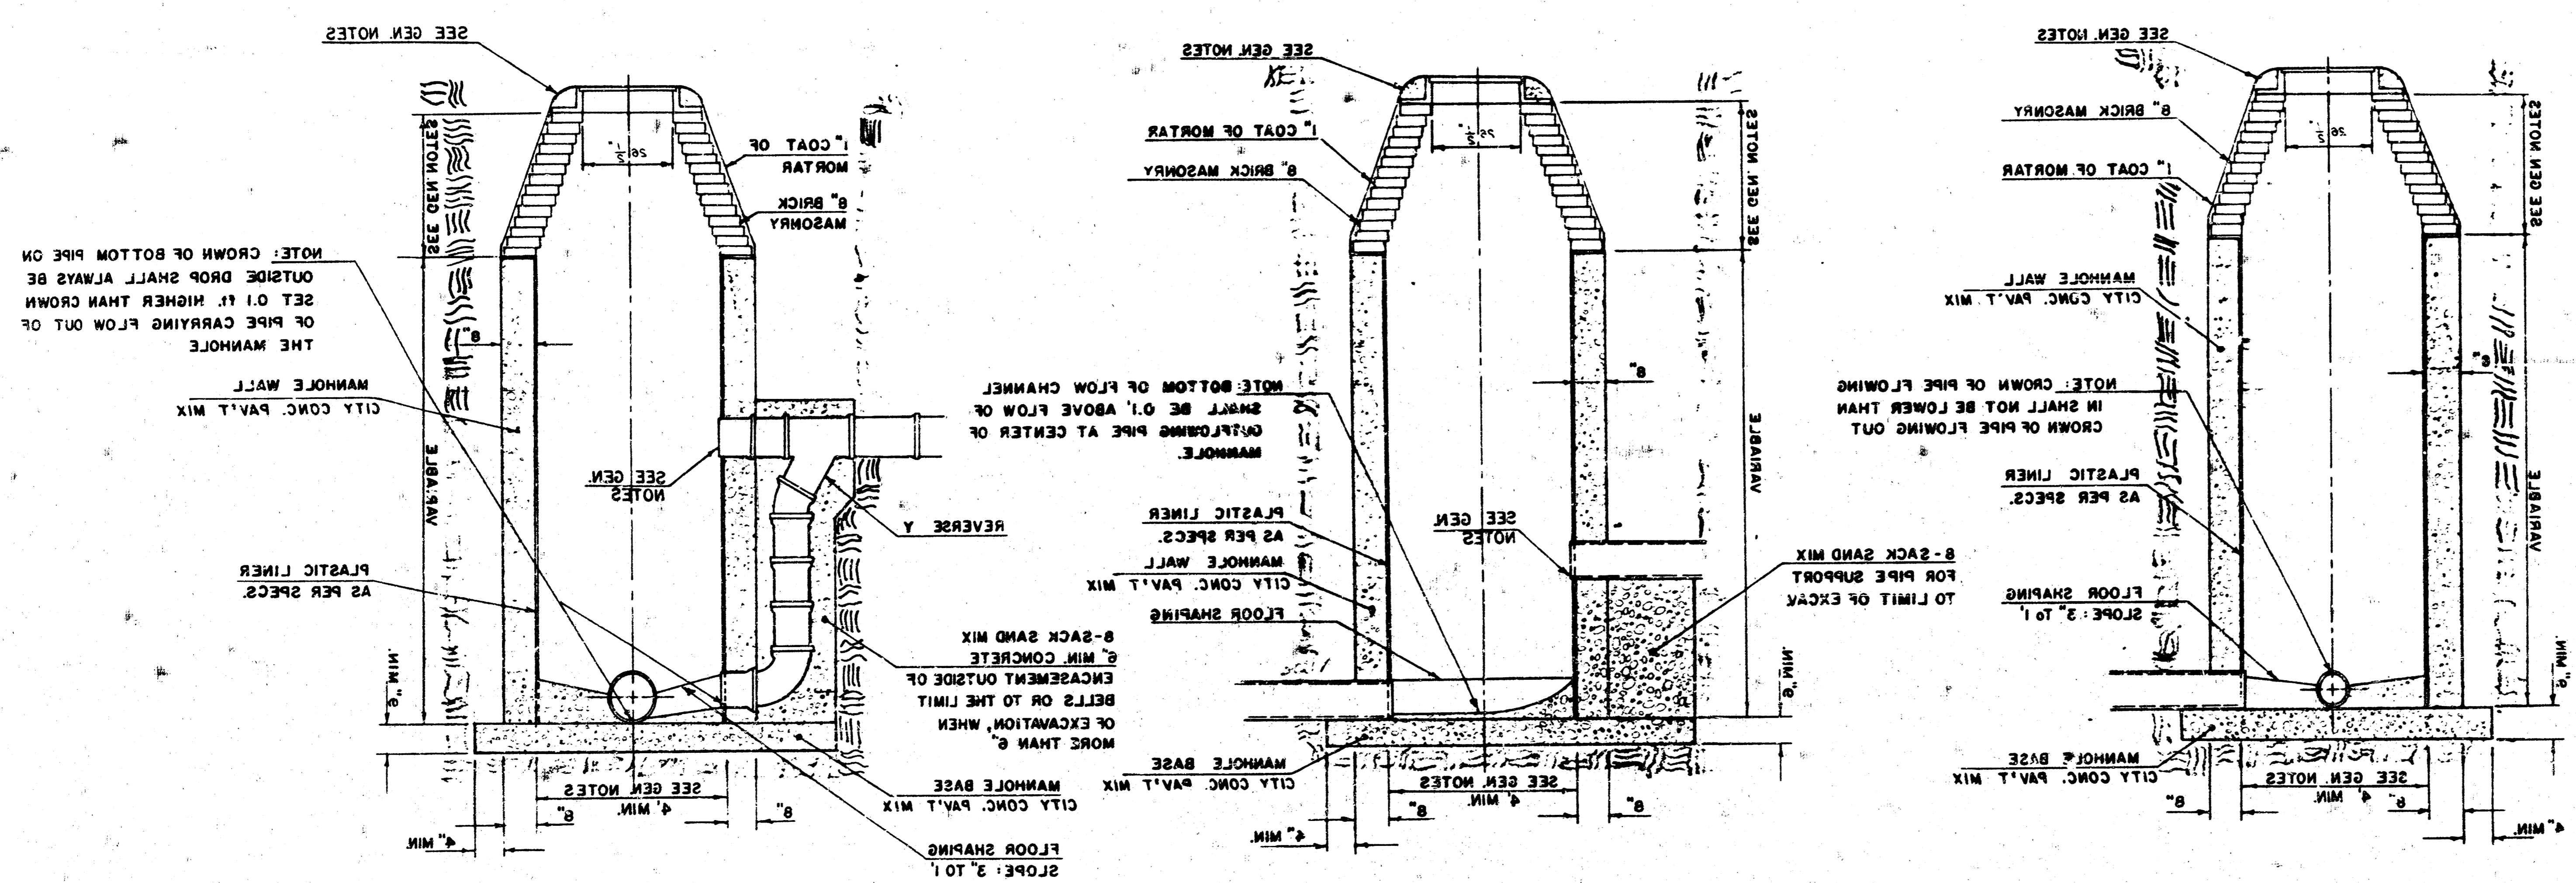

- GENERAL NOTES**
1. THE FLOOR OF ALL MANHOLES SHALL BE SHAPED WITH FLOOR CHANNELS SUCH THAT THE MANHOLE WILL BE SELF-CLEANING AND FREE OF DEBRIS WHERE SETTING SHOULD BE MAINTAINED TO SECURE FLOW THROUGH THE MANHOLE FROM ALL INLET PIPES TO THE OUTLET PIPE.
 2. AN OPENING SHALL BE CUT IN THE MANHOLE WALL FOR THE UPPER INLET PIPE FOR INSIDE AND OUTSIDE DROP MANHOLES. THE UPPER INLET PIPE SHALL BE CONNECTED INTO THIS OPENING WITH AN APPROVED BITUMINOUS COATING SUCH THAT THE CONNECTION WILL BE WATER-TIGHT. THE INTERIOR PLASTIC LINING SHALL BE SEWED AROUND THE INLET PIPE DURING IN SUCH A MANNER THAT THE EFFECTIVELY MAINTAIN THE INTEGRITY OF THE PROTECTIVE PLASTIC LINER.
 3. REINFORCING STEEL SHALL BE INSTALLED IN THE MANHOLE BASE. REINFORCING STEEL SHALL CONSIST OF NO. 4 BARS PLACED ON 6" CENTERS IN BOTH DIRECTIONS. REINFORCING STEEL SHALL BE PLACED 6" ABOVE THE BOTTOM OF THE MANHOLE BASE. COST OF REINFORCING AND INSTALLING REINFORCING STEEL SHALL BE INCLUDED IN THE UNIT PRICE BID FOR THE MANHOLE.
 4. AN OPENING SHALL BE CUT IN THE MANHOLE WALL FOR THE UPPER INLET PIPE FOR INSIDE AND OUTSIDE DROP MANHOLES. THE UPPER INLET PIPE SHALL BE CONNECTED INTO THIS OPENING WITH AN APPROVED BITUMINOUS COATING SUCH THAT THE CONNECTION WILL BE WATER-TIGHT. THE INTERIOR PLASTIC LINING SHALL BE SEWED AROUND THE INLET PIPE DURING IN SUCH A MANNER THAT THE EFFECTIVELY MAINTAIN THE INTEGRITY OF THE PROTECTIVE PLASTIC LINER.
 5. THE FLOOR OF ALL MANHOLES SHALL BE SHAPED WITH FLOOR CHANNELS SUCH THAT THE MANHOLE WILL BE SELF-CLEANING AND FREE OF DEBRIS WHERE SETTING SHOULD BE MAINTAINED TO SECURE FLOW THROUGH THE MANHOLE FROM ALL INLET PIPES TO THE OUTLET PIPE.
 6. MANHOLE COVER CASTINGS AND MANHOLE FRAME CASTINGS SHALL CONFORM TO THE REQUIREMENTS AS INDICATED IN THE STANDARD SPECIFICATIONS AND BE SHOWN IN THE STANDARD DETAIL DRAWING.
 7. THE VERTICAL DROP IN INSIDE DROP MANHOLES SHALL NOT EXCEED 4' FROM THE INLET PIPE TO THE OUTLET PIPE. THE SLOPE OF THE INLET PIPE SHALL NEVER BE LESS THAN THE SLOPE OF THE OUTLET PIPE.
 8. STANDARD MANHOLES TYPE "D" AND STANDARD INSIDE DROP MANHOLES TYPE "D" SHALL BE BID AS STANDARD MANHOLES FOR THE TYPE AND DIMENSIONS INDICATED. OUTSIDE DROP MANHOLES TYPE "D" SHALL BE BID AS STANDARD MANHOLES WITH A 2' VERTICAL INSIDE DROP.
 9. PIPES INSTALLED WITHIN THE EXCAVATION MADE FOR THE MANHOLE SHALL BE PROTECTED BY THE PLASTIC LINING. TYPE "D" MANHOLES MAY BE USED ON PIPE SIZES UP TO 36" WHEN THE MANHOLE DEPTH EXCEEDS THE RECORDED CORREL HEIGHT. 8" PLUS THE OUTSIDE DIAMETER OF THE LARGEST PIPE IN THE MANHOLE. ALL MANHOLES CONSTRUCTED WHERE THE PIPE SIZES ARE 36" OR LARGER SHALL HAVE A DIAMETER OF 4'. MANHOLES CONSTRUCTED WHERE THE PIPE SIZES ARE 36" OR LARGER SHALL HAVE A DIAMETER OF 3'. MANHOLES HAVING A DIAMETER OF 3' SHALL HAVE CORNERS OF THE MANHOLE WALL WHICH WOULD BE EXPOSED TO SEWER GAS SHALL BE PROTECTED BY THE PLASTIC LINING.
 10. WHEN THE MANHOLE DEPTH EXCEEDS THE RECORDED CORREL HEIGHT, SIZES UP TO 36" WHEN THE MANHOLE DEPTH EXCEEDS THE RECORDED CORREL HEIGHT, 8" PLUS THE OUTSIDE DIAMETER OF THE LARGEST PIPE IN THE MANHOLE. ALL MANHOLES CONSTRUCTED WHERE THE PIPE SIZES ARE 36" OR LARGER SHALL HAVE A DIAMETER OF 4'. MANHOLES CONSTRUCTED WHERE THE PIPE SIZES ARE 36" OR LARGER SHALL HAVE A DIAMETER OF 3'. MANHOLES HAVING A DIAMETER OF 3' SHALL HAVE CORNERS OF THE MANHOLE WALL WHICH WOULD BE EXPOSED TO SEWER GAS SHALL BE PROTECTED BY THE PLASTIC LINING.
 11. MANHOLES SHALL BE CONSTRUCTED WITH PLASTIC LINING. ALL INSIDE PLASTIC LINING SHALL BE INSTALLED WITHIN THE EXCAVATION MADE FOR THE MANHOLE. PLASTIC LINING SHALL CONFORM TO THE MANHOLE RING AS SHOWN ON THE DRAWING. PLASTIC LINING SHALL CONFORM TO THE MANHOLE RING AS SHOWN ON THE DRAWING. PLASTIC LINING SHALL CONFORM TO THE MANHOLE RING AS SHOWN ON THE DRAWING. PLASTIC LINING SHALL CONFORM TO THE MANHOLE RING AS SHOWN ON THE DRAWING.
 12. PLASTIC LINING SHALL BE INSTALLED WITHIN THE EXCAVATION MADE FOR THE MANHOLE. PLASTIC LINING SHALL CONFORM TO THE MANHOLE RING AS SHOWN ON THE DRAWING. PLASTIC LINING SHALL CONFORM TO THE MANHOLE RING AS SHOWN ON THE DRAWING. PLASTIC LINING SHALL CONFORM TO THE MANHOLE RING AS SHOWN ON THE DRAWING.
 13. PLASTIC LINING SHALL BE INSTALLED WITHIN THE EXCAVATION MADE FOR THE MANHOLE. PLASTIC LINING SHALL CONFORM TO THE MANHOLE RING AS SHOWN ON THE DRAWING. PLASTIC LINING SHALL CONFORM TO THE MANHOLE RING AS SHOWN ON THE DRAWING. PLASTIC LINING SHALL CONFORM TO THE MANHOLE RING AS SHOWN ON THE DRAWING.
 14. PLASTIC LINING SHALL BE INSTALLED WITHIN THE EXCAVATION MADE FOR THE MANHOLE. PLASTIC LINING SHALL CONFORM TO THE MANHOLE RING AS SHOWN ON THE DRAWING. PLASTIC LINING SHALL CONFORM TO THE MANHOLE RING AS SHOWN ON THE DRAWING. PLASTIC LINING SHALL CONFORM TO THE MANHOLE RING AS SHOWN ON THE DRAWING.
 15. PLASTIC LINING SHALL BE INSTALLED WITHIN THE EXCAVATION MADE FOR THE MANHOLE. PLASTIC LINING SHALL CONFORM TO THE MANHOLE RING AS SHOWN ON THE DRAWING. PLASTIC LINING SHALL CONFORM TO THE MANHOLE RING AS SHOWN ON THE DRAWING. PLASTIC LINING SHALL CONFORM TO THE MANHOLE RING AS SHOWN ON THE DRAWING.
 16. PLASTIC LINING SHALL BE INSTALLED WITHIN THE EXCAVATION MADE FOR THE MANHOLE. PLASTIC LINING SHALL CONFORM TO THE MANHOLE RING AS SHOWN ON THE DRAWING. PLASTIC LINING SHALL CONFORM TO THE MANHOLE RING AS SHOWN ON THE DRAWING. PLASTIC LINING SHALL CONFORM TO THE MANHOLE RING AS SHOWN ON THE DRAWING.
 17. PLASTIC LINING SHALL BE INSTALLED WITHIN THE EXCAVATION MADE FOR THE MANHOLE. PLASTIC LINING SHALL CONFORM TO THE MANHOLE RING AS SHOWN ON THE DRAWING. PLASTIC LINING SHALL CONFORM TO THE MANHOLE RING AS SHOWN ON THE DRAWING. PLASTIC LINING SHALL CONFORM TO THE MANHOLE RING AS SHOWN ON THE DRAWING.
 18. PLASTIC LINING SHALL BE INSTALLED WITHIN THE EXCAVATION MADE FOR THE MANHOLE. PLASTIC LINING SHALL CONFORM TO THE MANHOLE RING AS SHOWN ON THE DRAWING. PLASTIC LINING SHALL CONFORM TO THE MANHOLE RING AS SHOWN ON THE DRAWING. PLASTIC LINING SHALL CONFORM TO THE MANHOLE RING AS SHOWN ON THE DRAWING.
 19. PLASTIC LINING SHALL BE INSTALLED WITHIN THE EXCAVATION MADE FOR THE MANHOLE. PLASTIC LINING SHALL CONFORM TO THE MANHOLE RING AS SHOWN ON THE DRAWING. PLASTIC LINING SHALL CONFORM TO THE MANHOLE RING AS SHOWN ON THE DRAWING. PLASTIC LINING SHALL CONFORM TO THE MANHOLE RING AS SHOWN ON THE DRAWING.
 20. PLASTIC LINING SHALL BE INSTALLED WITHIN THE EXCAVATION MADE FOR THE MANHOLE. PLASTIC LINING SHALL CONFORM TO THE MANHOLE RING AS SHOWN ON THE DRAWING. PLASTIC LINING SHALL CONFORM TO THE MANHOLE RING AS SHOWN ON THE DRAWING. PLASTIC LINING SHALL CONFORM TO THE MANHOLE RING AS SHOWN ON THE DRAWING.


MANHOLE FRAME AND COVER DETAIL

ADOPTED AS STANDARD DESIGN


BY

City of Wichita, Kansas

MANHOLE FRAME
Weight: 540 Lbs

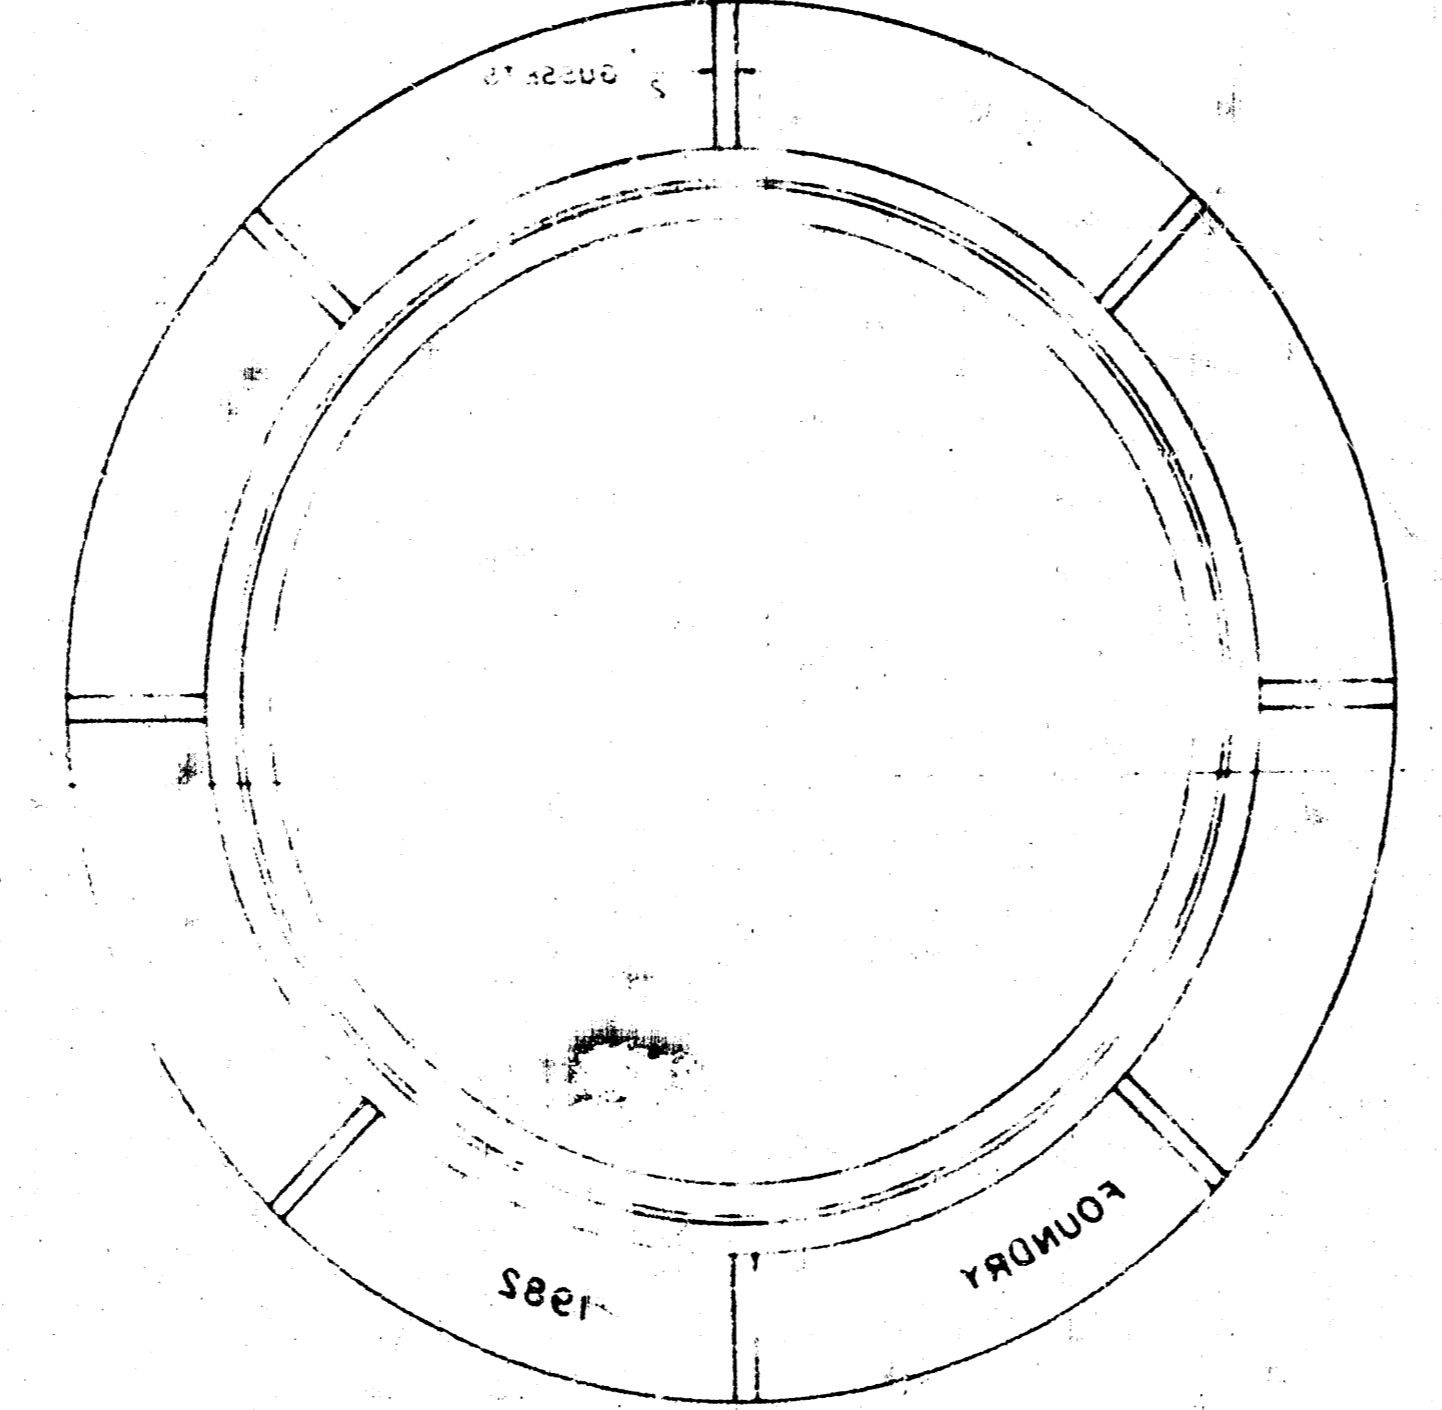


TOP VIEW

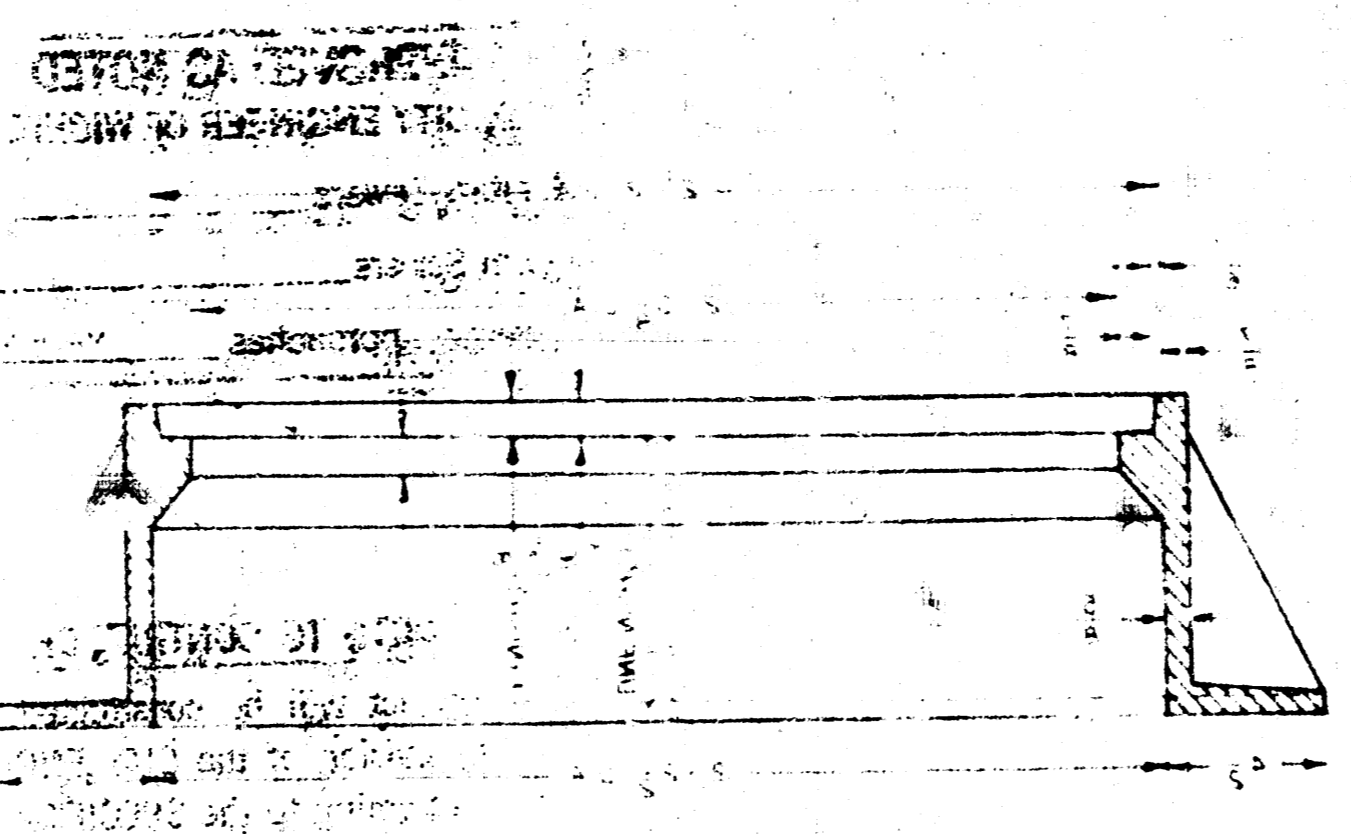


SECTION A-A


MANHOLE COVER
Weight: 180 Lbs

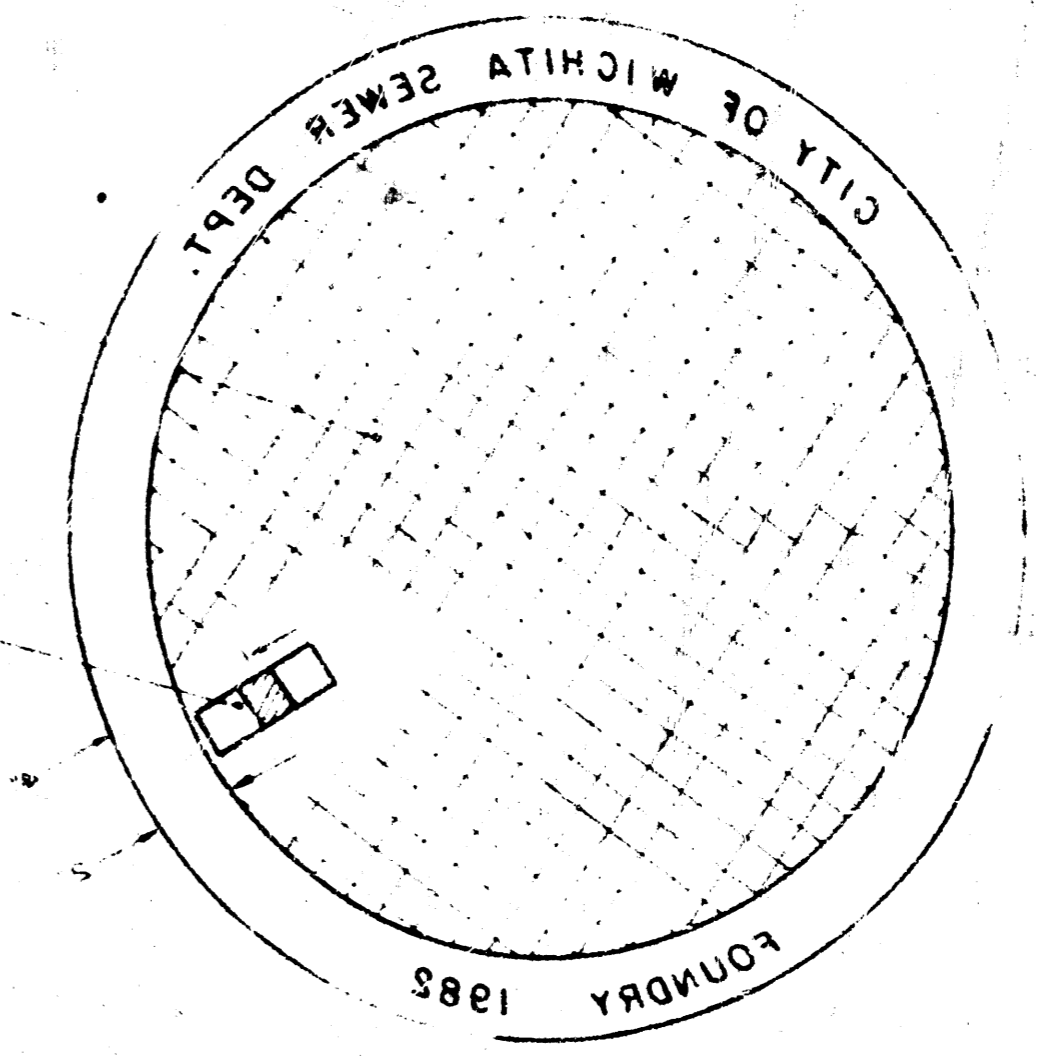

TOP VIEW

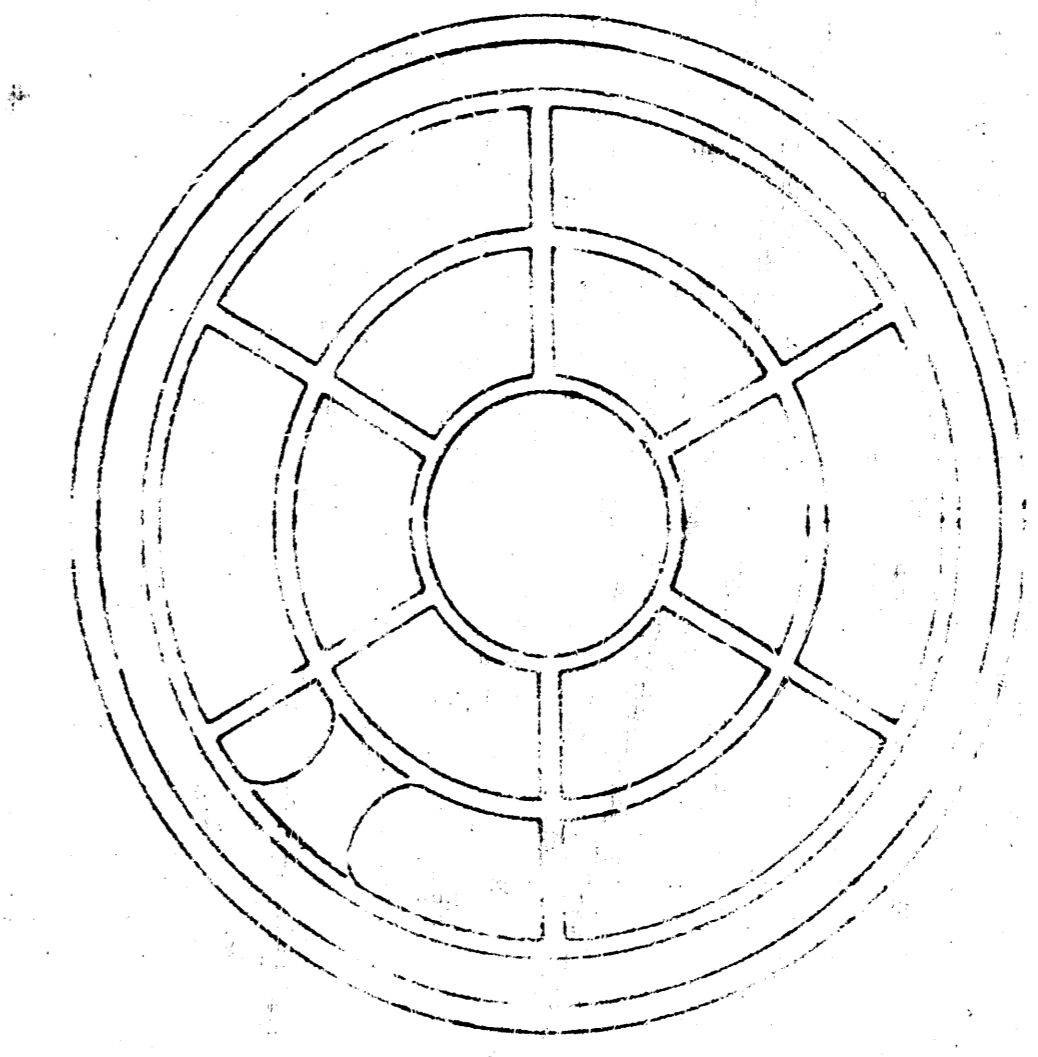


BOTTOM VIEW

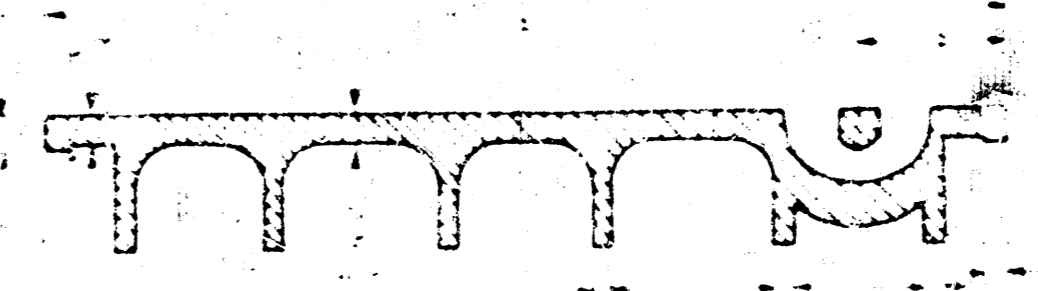


SECTION VIEW

PICKHOLE DETAIL

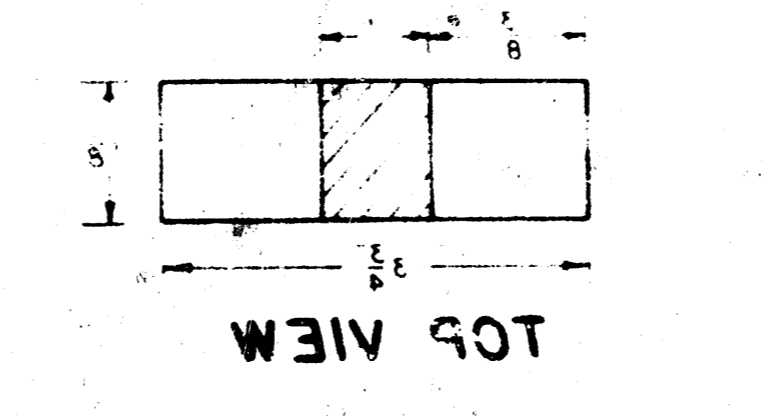

TOP VIEW

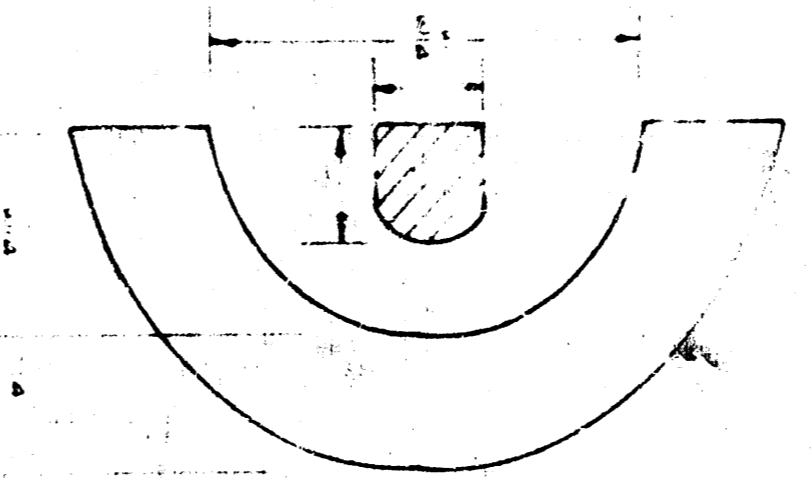

SECTION VIEW

GENERAL NOTES:
1. THE MANHOLE FRAME AND COVER SHALL BE CONCRETE AND SHALL BE CAST IN PLACE.
2. THE MANHOLE FRAME SHALL BE CAST WITH A REINFORCING BARS AS SHOWN ON THE DRAWING.
3. THE MANHOLE COVER SHALL BE CAST WITH A REINFORCING BARS AS SHOWN ON THE DRAWING.
4. THE MANHOLE FRAME SHALL BE CAST WITH A REINFORCING BARS AS SHOWN ON THE DRAWING.
5. THE MANHOLE COVER SHALL BE CAST WITH A REINFORCING BARS AS SHOWN ON THE DRAWING.
6. THE MANHOLE FRAME SHALL BE CAST WITH A REINFORCING BARS AS SHOWN ON THE DRAWING.
7. THE MANHOLE COVER SHALL BE CAST WITH A REINFORCING BARS AS SHOWN ON THE DRAWING.
8. THE MANHOLE FRAME SHALL BE CAST WITH A REINFORCING BARS AS SHOWN ON THE DRAWING.
9. THE MANHOLE COVER SHALL BE CAST WITH A REINFORCING BARS AS SHOWN ON THE DRAWING.
10. THE MANHOLE FRAME SHALL BE CAST WITH A REINFORCING BARS AS SHOWN ON THE DRAWING.
11. THE MANHOLE COVER SHALL BE CAST WITH A REINFORCING BARS AS SHOWN ON THE DRAWING.
12. THE MANHOLE FRAME SHALL BE CAST WITH A REINFORCING BARS AS SHOWN ON THE DRAWING.
13. THE MANHOLE COVER SHALL BE CAST WITH A REINFORCING BARS AS SHOWN ON THE DRAWING.
14. THE MANHOLE FRAME SHALL BE CAST WITH A REINFORCING BARS AS SHOWN ON THE DRAWING.
15. THE MANHOLE COVER SHALL BE CAST WITH A REINFORCING BARS AS SHOWN ON THE DRAWING.