


| | | | | |
|--------|-------------|------|-----------|--------|
| STATE | PROJECT NO. | YEAR | SHEET NO. | SHEETS |
| KANSAS | 87N-0135-01 | 2005 | 3 | 119 |

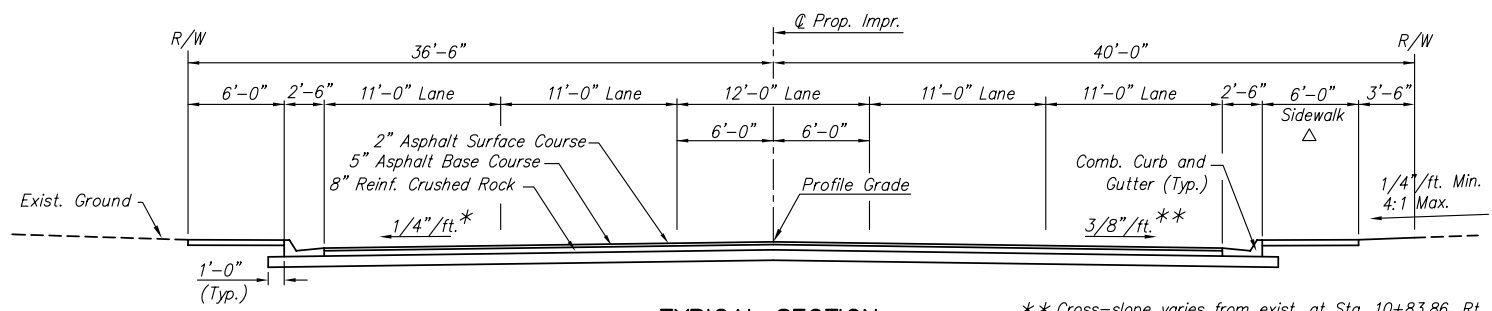


**TYPICAL SECTION
STA. 10+83.86 TO STA. 14+71.71**

* Cross-slope varies from exist. at Sta. 10+83.86, Lt. to 1/4"/ft. at Sta. 11+33.86, Lt.
Cross-slope varies from 1/4"/ft. at Sta. 14+31.81, Lt. to 3/16"/ft. at Sta. 14+84.81, Lt.

△ Exist. 4'-0" sidewalk from Sta. 10+83.36 to 13+00 and new 6'-0" sidewalk from Sta. 13+80 to Sta. 14+71.71


** Cross-slope varies from exist. at Sta. 10+83.86, Rt. to 1/4"/ft. at Sta. 11+33.86, Rt.
Cross-slope varies from 1/4"/ft. at Sta. 12+00.00, Rt. to 3/8"/ft. at Sta. 12+50.00, Rt.
Cross-slope varies from 3/8"/ft. at Sta. 14+31.81, Rt. to 3/16"/ft. at Sta. 14+84.81, Rt.

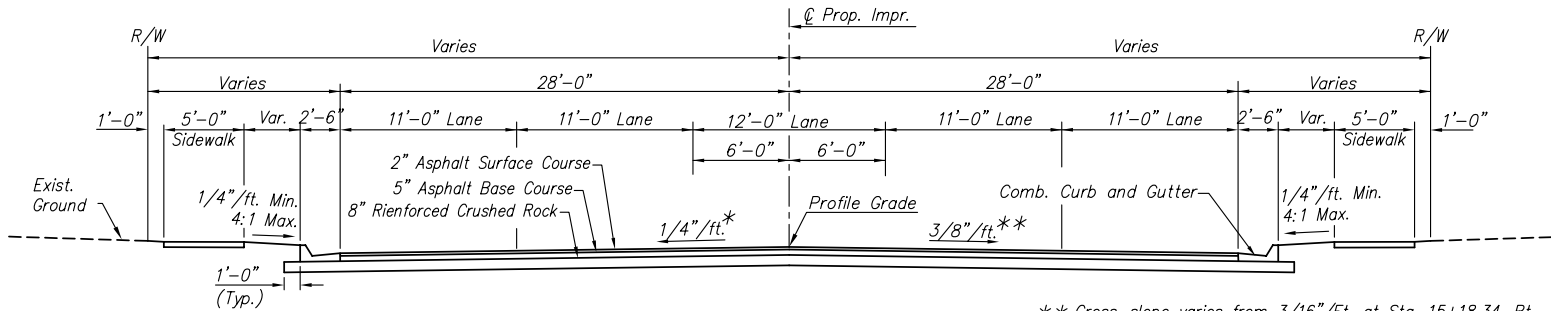


**TYPICAL SECTION
STA. 15+31.45 TO STA. 30+34.80**

* Cross-slope varies from 3/16"/ft. at Sta. 15+18.34, Lt. to 3/8"/ft. at Sta. 15+71.71, Lt.
Cross-slope varies from 3/8"/ft. at Sta. 20+50.00, Lt. to 1/4"/ft. at Sta. 21+00.00, Lt.
Cross-slope varies from 1/4"/ft. at Sta. 26+0.00, Lt. to 3/8"/ft. at Sta. 26+50.00, Lt.

** Cross-slope varies from 3/16"/ft. at Sta. 15+18.34, Rt. to 3/8"/ft. at Sta. 15+71.71, Rt.

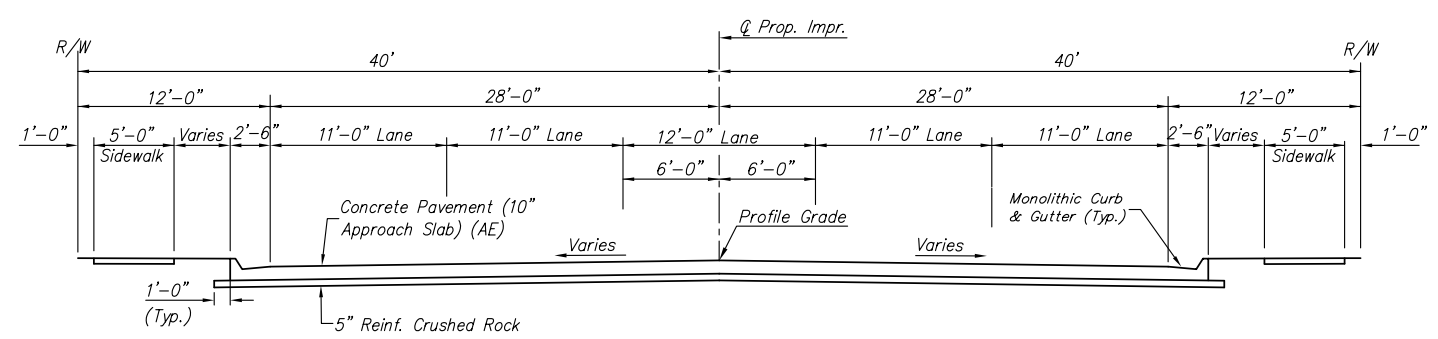


**TYPICAL SECTION
STA. 14+71.71 TO STA. 14+84.81 (WEST APPROACH SLAB)
STA. 15+18.34 TO STA. 15+31.45 (EAST APPROACH SLABS)**

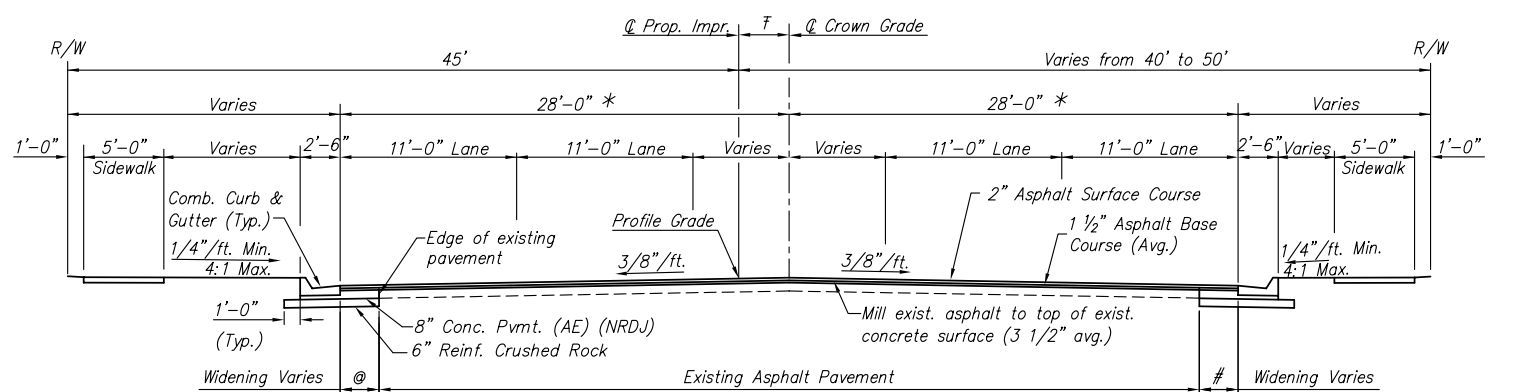


**TYPICAL SECTION
STA. 30+34.80 TO STA. 32+20.32**

* Pavement width transitions from 28'-0" at Sta. 30+34.80 to 27'-6" at Sta. 32+20.32
‡ Crown grade location varies from 0'-0" at Sta. 30+34.80 to 6'-7/4" at Sta. 32+20.32
Right widening varies from 3'-6" at Sta. 30+34.80 to 5'-4" at Sta. 32+18.78
@ Left widening varies from 8'-0" at Sta. 30+34.80 to 0'-0" at Sta. 32+20.32

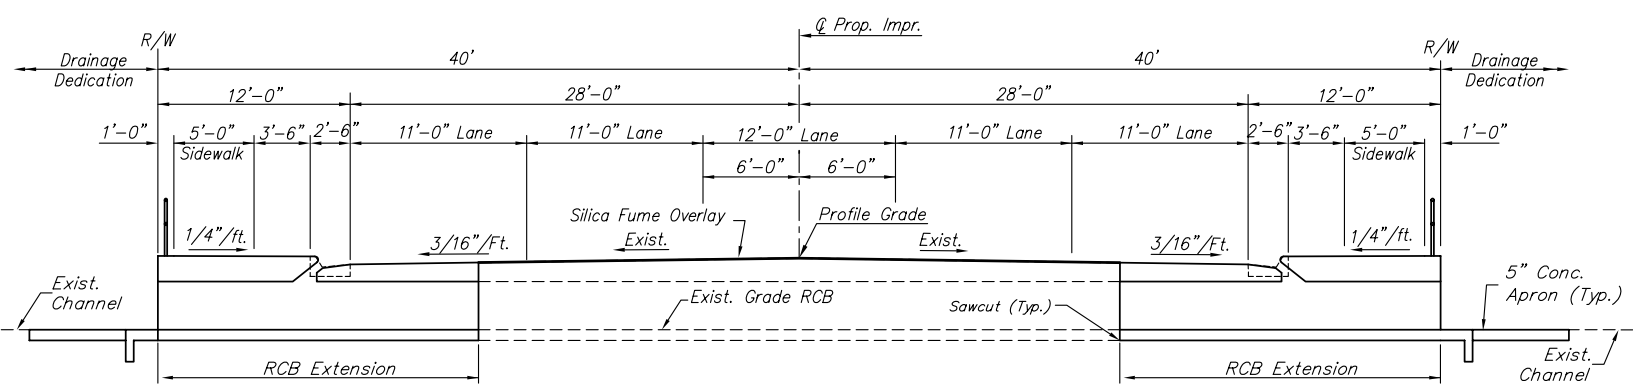

**TYPICAL SECTION
STA. 14+84.81 TO STA. 15+18.34
(REINFORCED CONCRETE GRADE BOX CULVERT)**

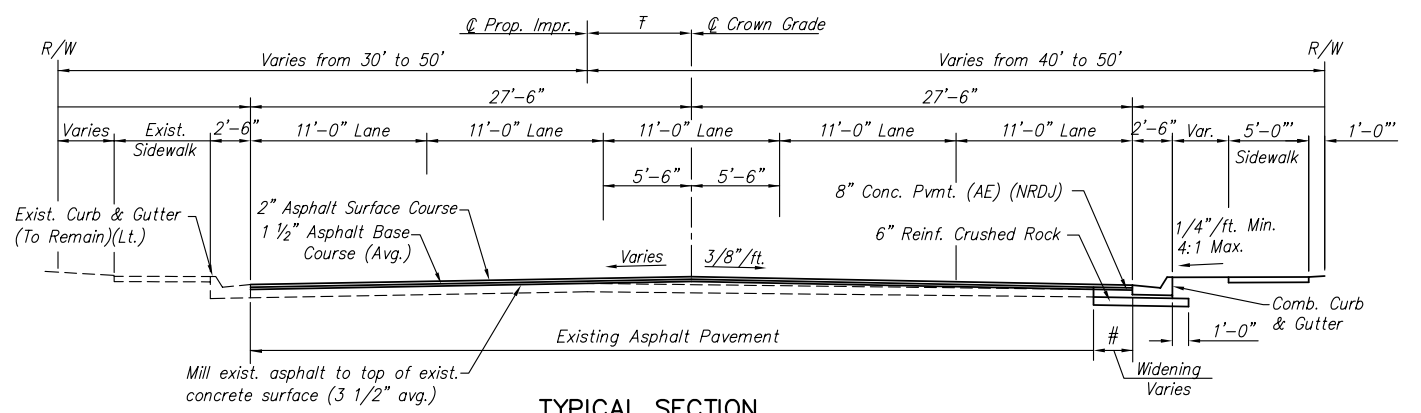

**TYPICAL SECTION
STA. 32+20.32 TO STA. 34+25.50**

Right widening varies from 5'-4" at Sta. 32+18.78, Rt. to 0'-0" at Sta. 34+25.50, Rt.
‡ Crown Grade location varies from 6'-7/4" at Sta. 32+20.32 to 5'-7/2" at Sta. 34+25.50

KANSAS DEPARTMENT OF TRANSPORTATION

TYPICAL SECTIONS

PROJECT NO. 87N-0135-01 SEDGWICK CO.

MKEC ENGINEERING CONSULTANTS, INC.
WICHITA, KANSAS

| | |
|-------------------------|--------------------------------|
| DESIGNED BY: JRA | CHECKED BY: JRA |
| DRAWN BY: WNJ, DPR, JSB | DATE: DEC. 2005 SHEET 3 OF 137 |