



NORTH



HORIZ. (FEET)


0 20 40
GRAPHIC SCALE FOR 1" = 20'

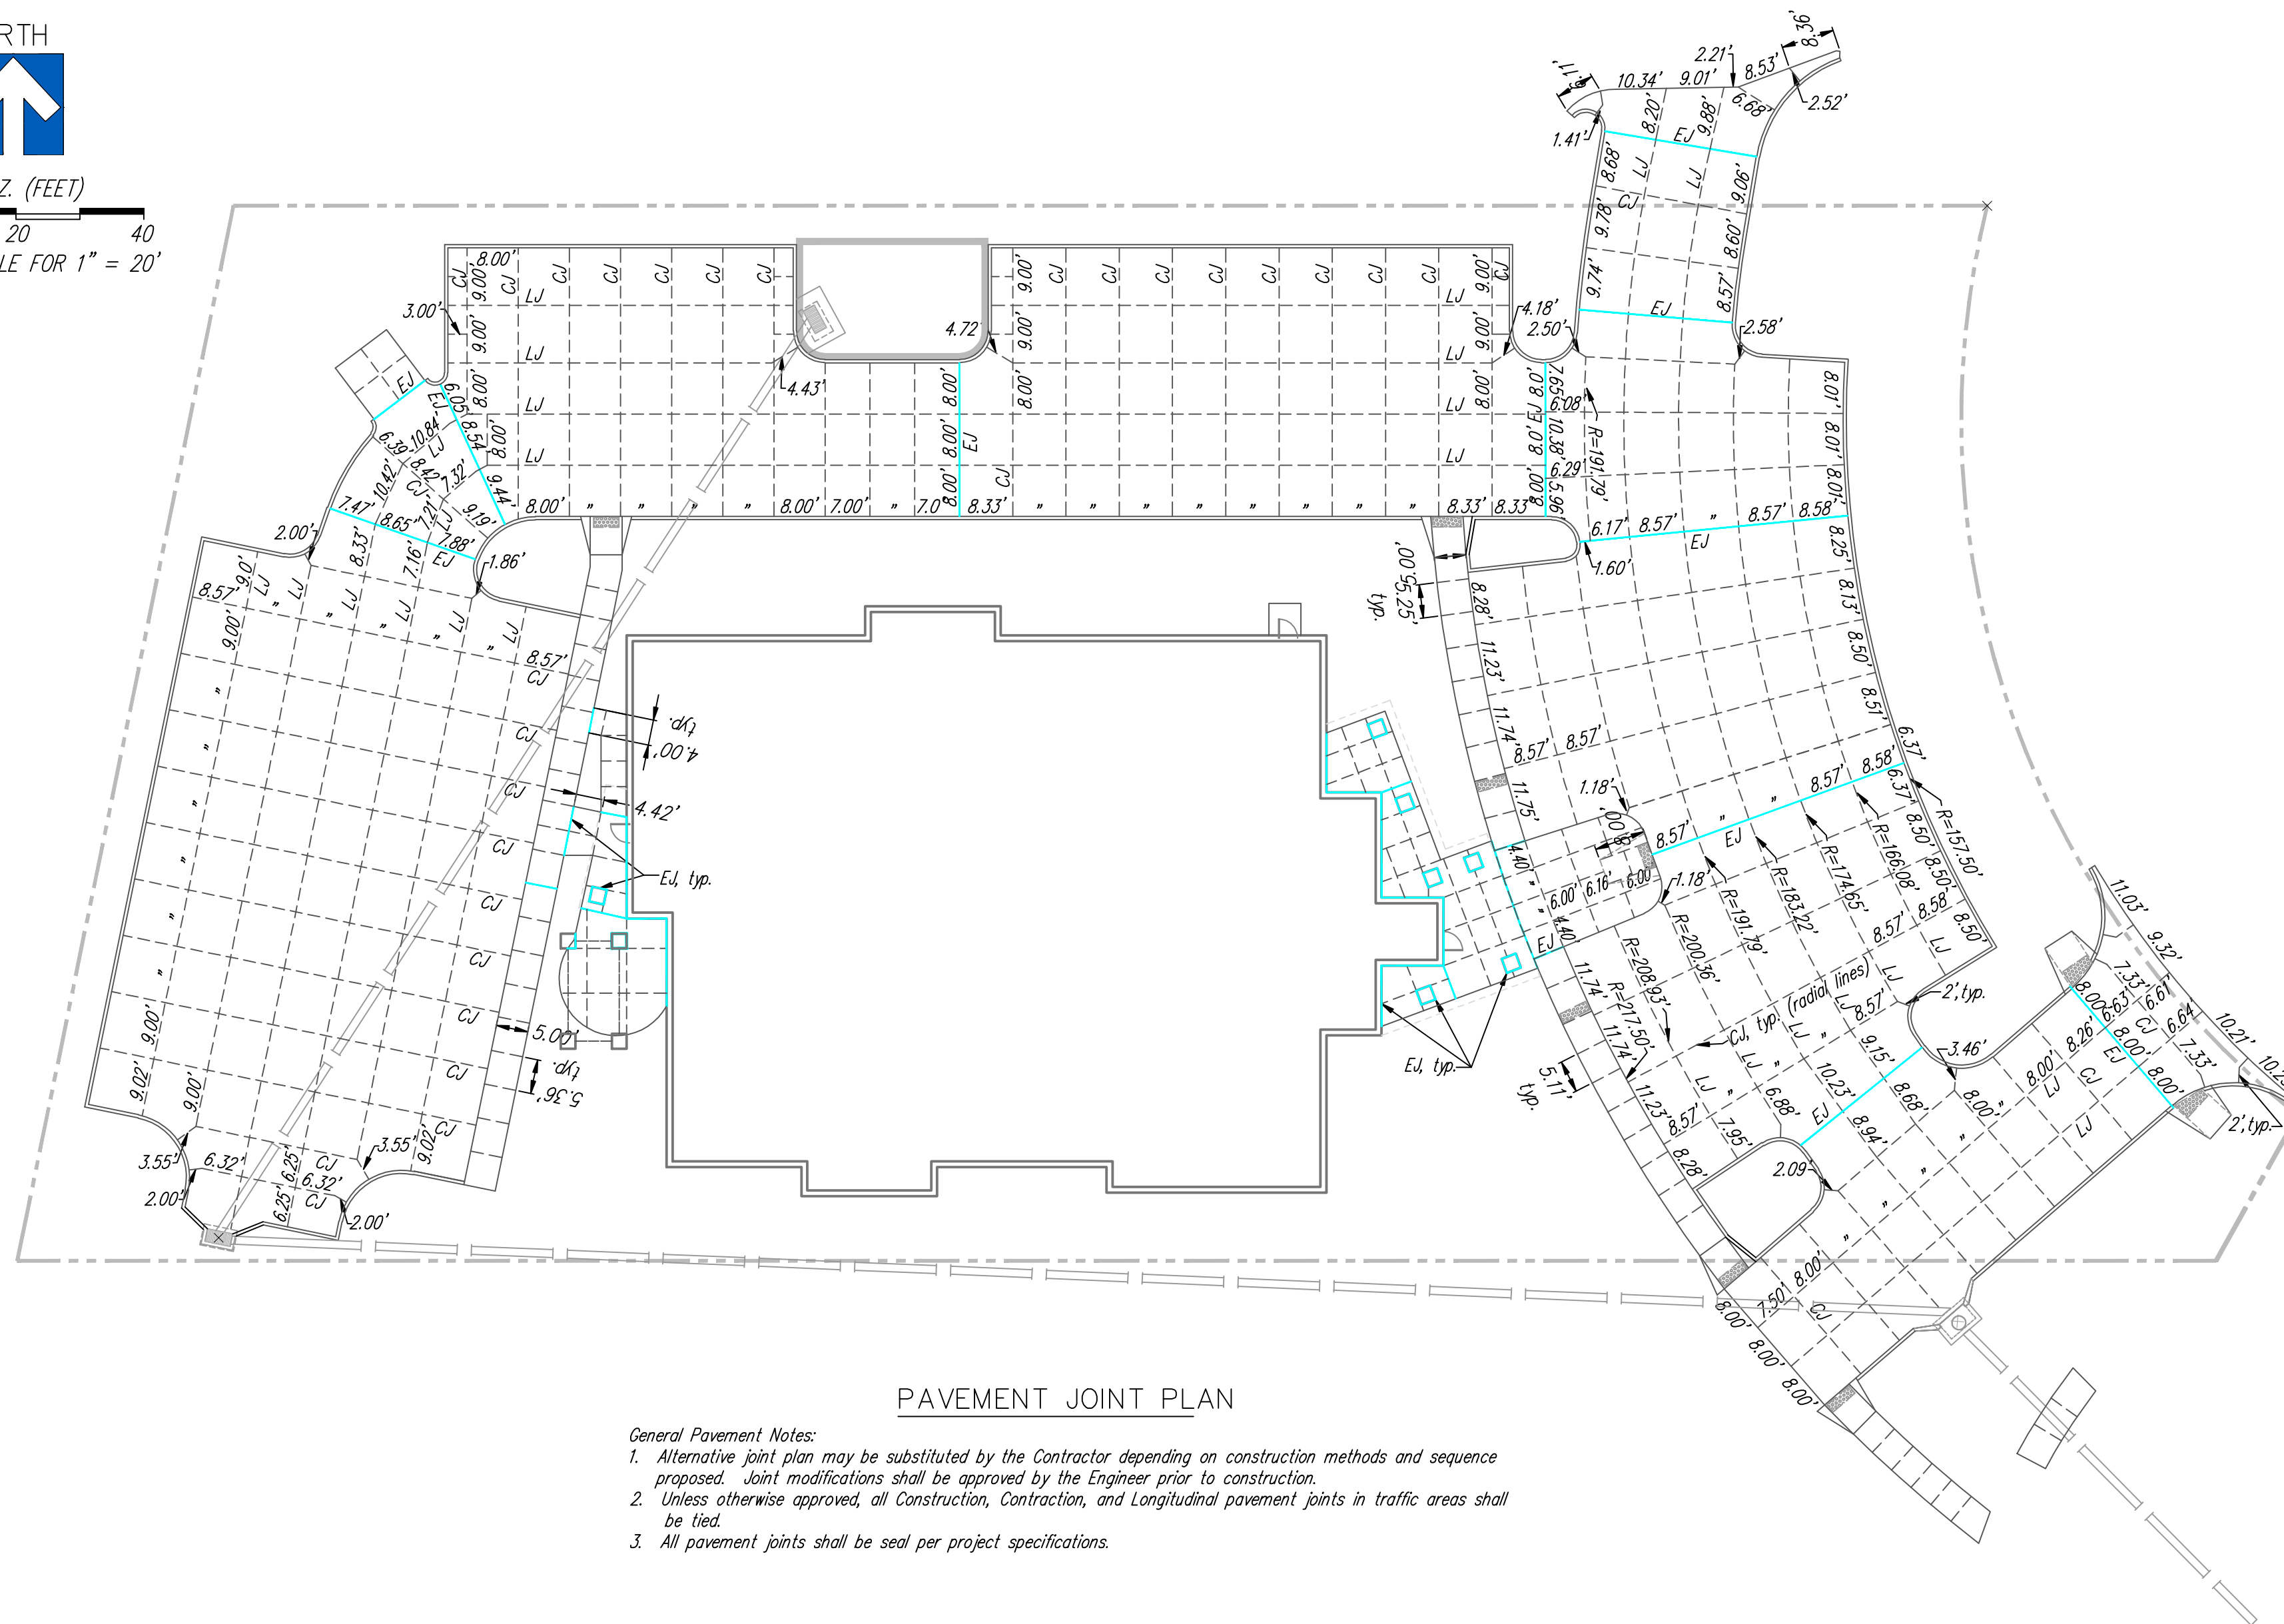

PAVEMENT JOINT PLAN


General Pavement Notes:

1. Alternative joint plan may be substituted by the Contractor depending on construction methods and sequence proposed. Joint modifications shall be approved by the Engineer prior to construction.
2. Unless otherwise approved, all Construction, Contraction, and Longitudinal pavement joints in traffic areas shall be tied.
3. All pavement joints shall be seal per project specifications.

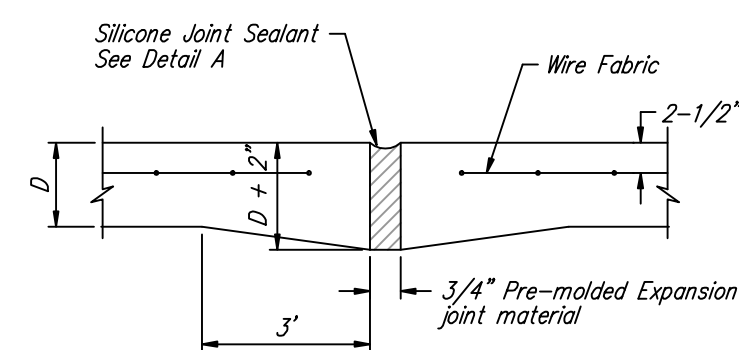


EXPANSION JOINT (E.J.)


NOTE: Extra Thickness to be Subsidiary to Price of Square Yards Pavement

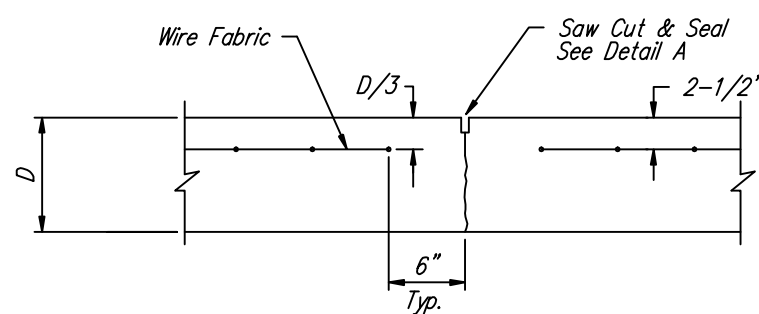


CONTRACTION JOINT DETAIL (C.J.)

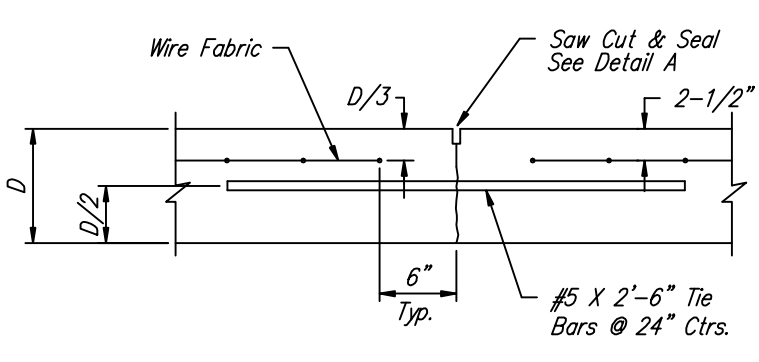


CONTRACTION JOINT DETAIL (C.J.)
(TIED CONTRACTION JOINT)

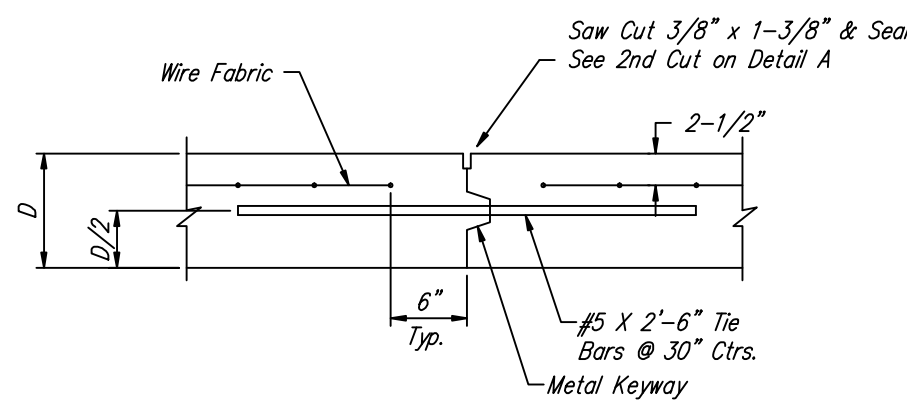


OPTIONAL CONTRACTION JOINT (C.J.)
(TIED AND KEYED CONTRACTION JOINT)

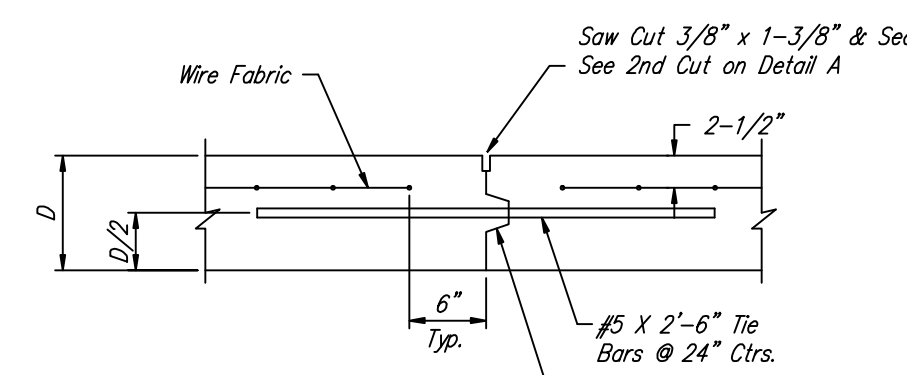


LONGITUDINAL JOINT DETAIL (L.J.)
(TIED AND KEYED CONSTRUCTION JOINT)

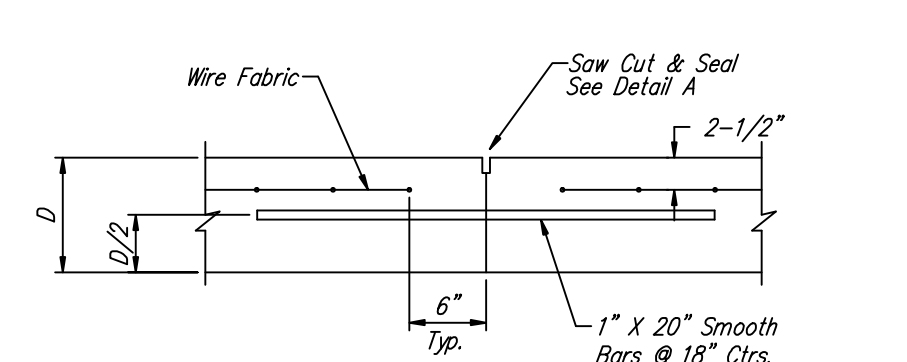


OPTIONAL LONGITUDINAL JOINT DETAIL (L.J.)
(TIED CONSTRUCTION JOINT)

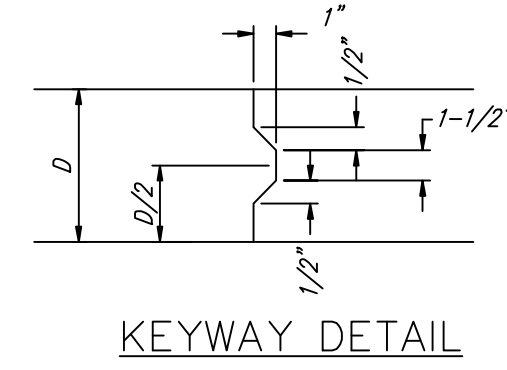


KEYWAY DETAIL

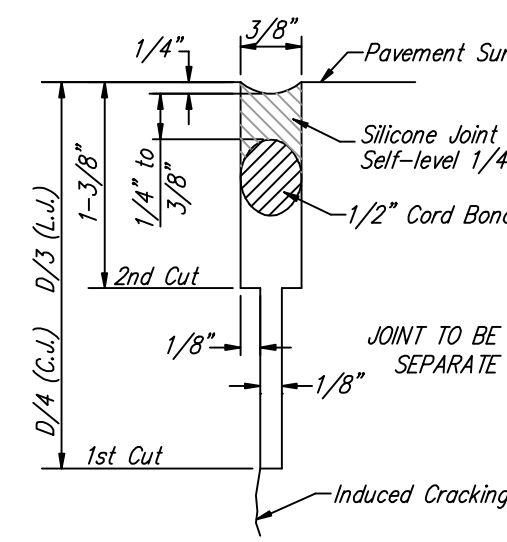

SAW JOINT DETAIL
(DETAIL A)

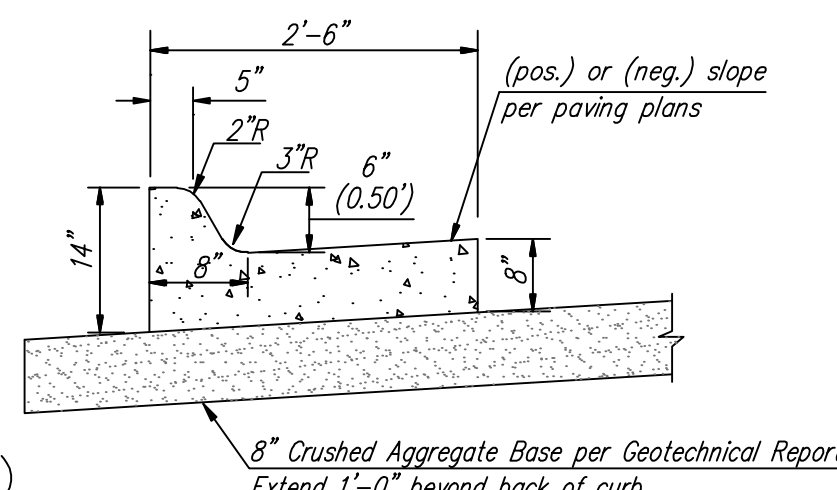


30" MONOLITHIC CURB & GUTTER
Typical Sections, no scale

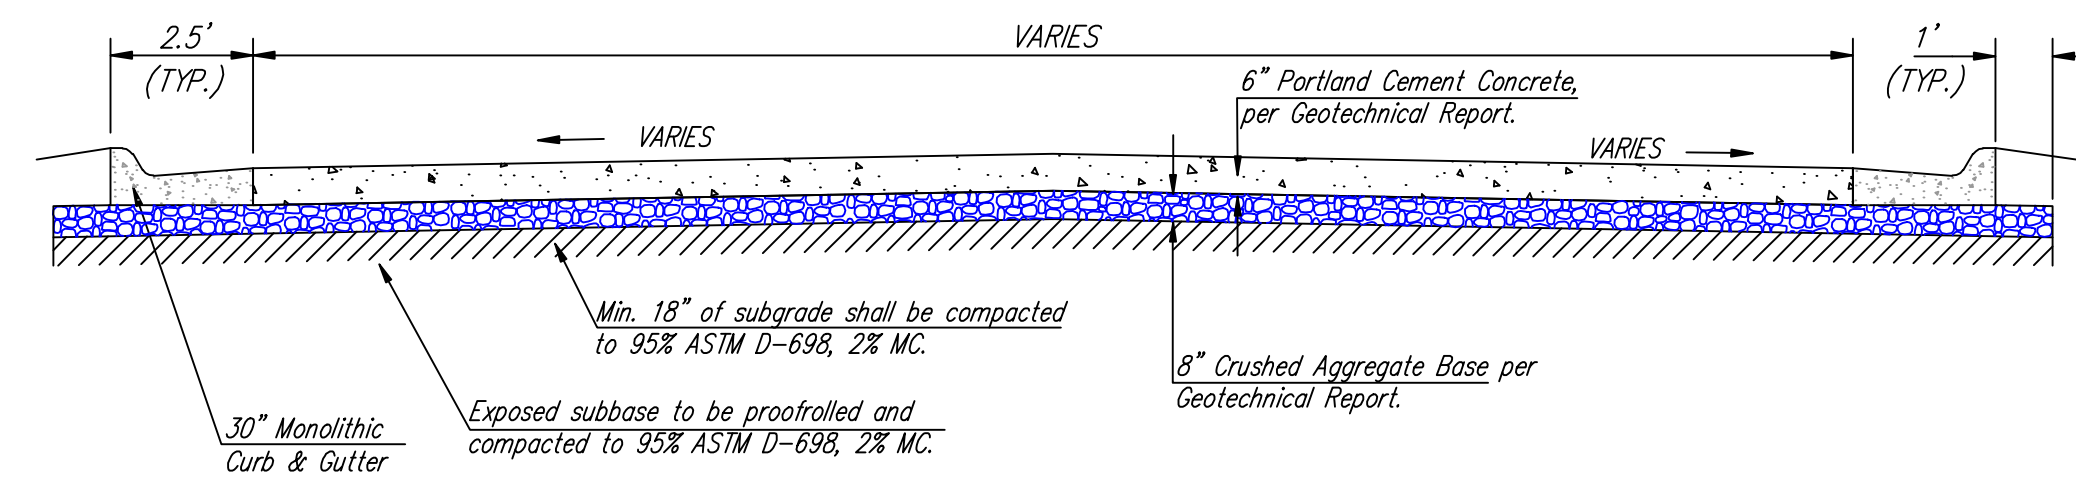


TYPICAL CONCRETE PAVEMENT SECTION
no scale

CONCRETE PAVEMENT GENERAL NOTES:


1. CONCRETE PAVEMENT BETWEEN THE COMBINED CURB AND GUTTER SHALL BE PAID AS SQUARE YARD OF 6" UNREINFORCED CONCRETE PAVEMENT.
2. CONCRETE PAVEMENT SHALL BE CONSTRUCTED IN ACCORDANCE WITH SECTION 400 - PAVEMENT, OF THE "CITY OF WICHITA STANDARD SPECIFICATIONS FOR CITY PROJECTS", THE DEPARTMENT OF PUBLIC WORKS, DIVISION OF ENGINEERING.

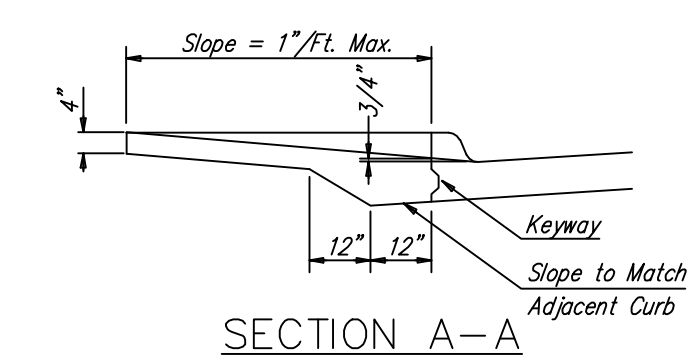


SECTION A-A

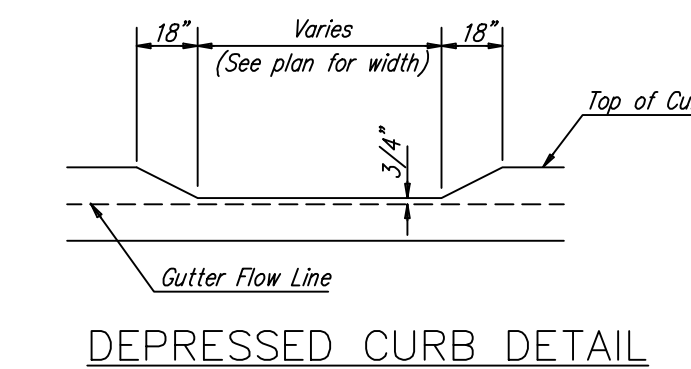


DEPRESSED CURB DETAIL

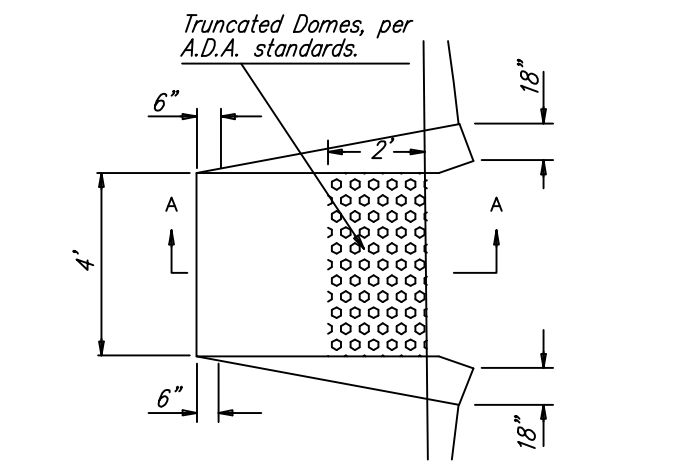


WHEELCHAIR RAMP PLAN VIEW

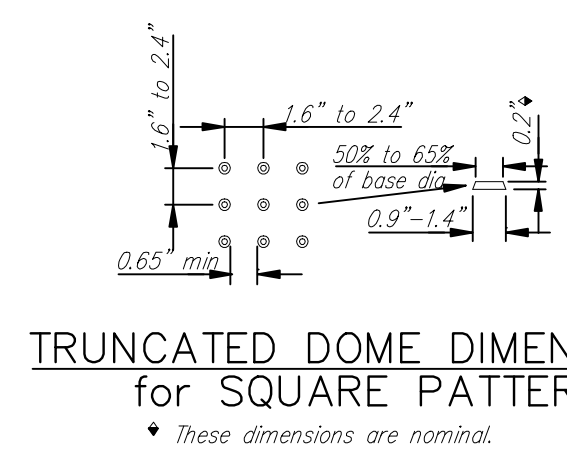

TRUNCATED DOME DIMENSIONS
for SQUARE PATTERN
These dimensions are nominal.

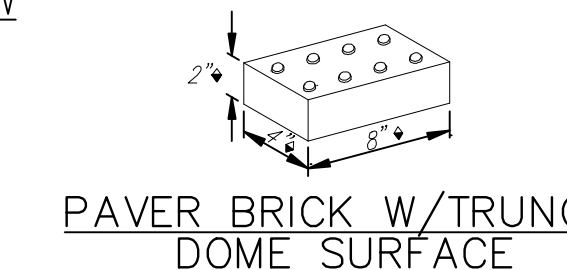


PAVER BRICK W/ TRUNCATED
DOME SURFACE

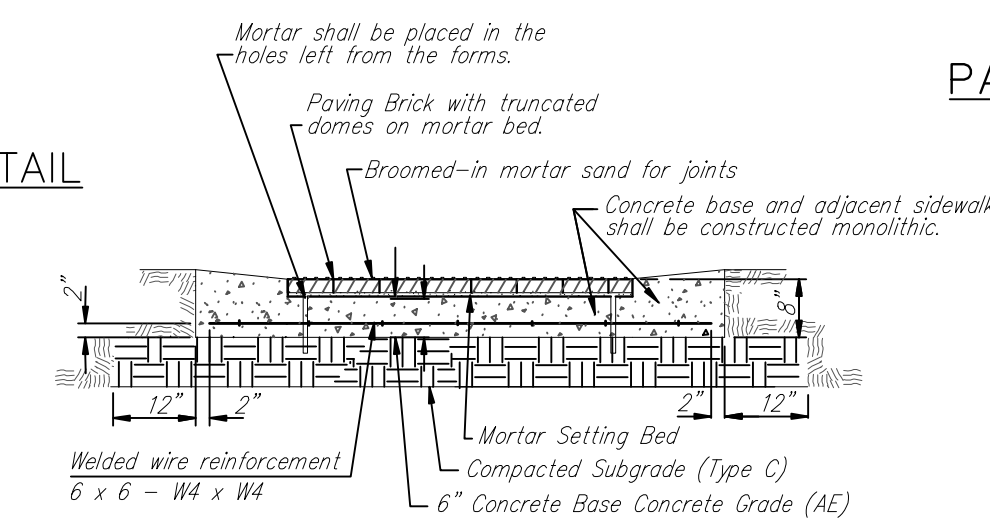


TYPICAL SECTION OF PAVER BRICK

WHEELCHAIR RAMP DETAILS

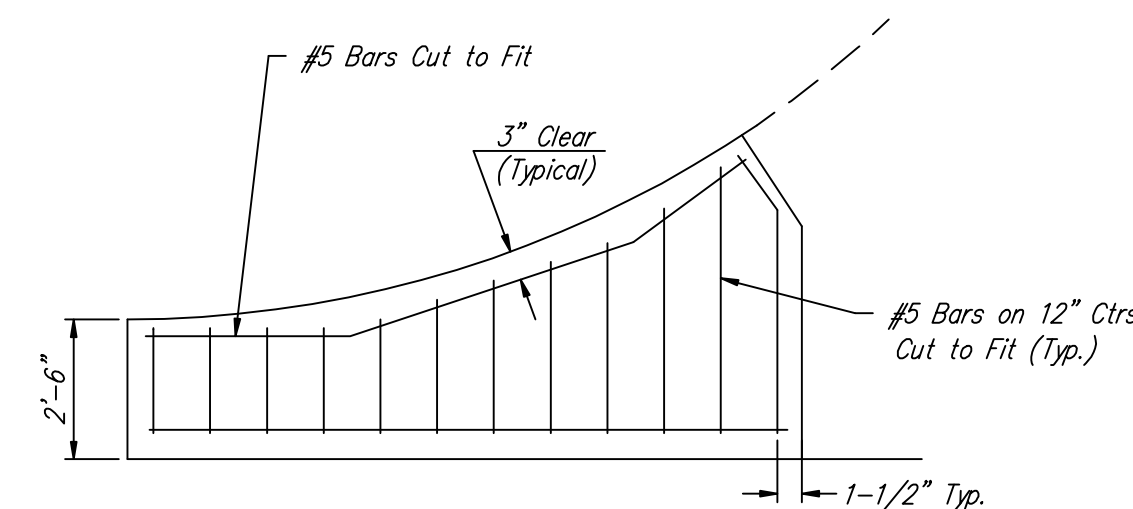


WING REINFORCING DETAIL, TYP.

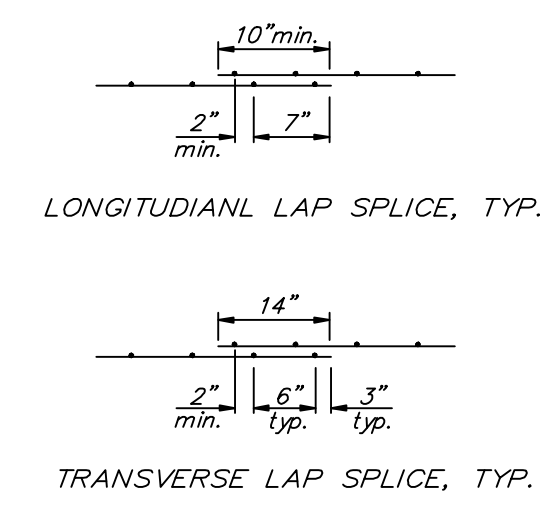

WFF DETAILS

WELDED WIRE FABRIC NOTES:

1. WELDED WIRE FABRIC SHALL BE WWF 6x6-W4.7xW4.7, WEIGHING 68 LBS./100 SQ.-FT.
2. WELDED WIRE FABRIC SHALL HAVE A MINIMUM 0.09 SQ.-IN. PER FOOT OF REINFORCEMENT RUNNING IN EACH DIRECTION.
3. WELDED WIRE FABRIC SHALL BE SUPPLIED IN SHEETS AND FIELD CUT TO FIT PAVEMENT PANELS AND AS DETAILED. OVERLAP AND SPLICE MULTIPLE PANELS AS REQUIRED.

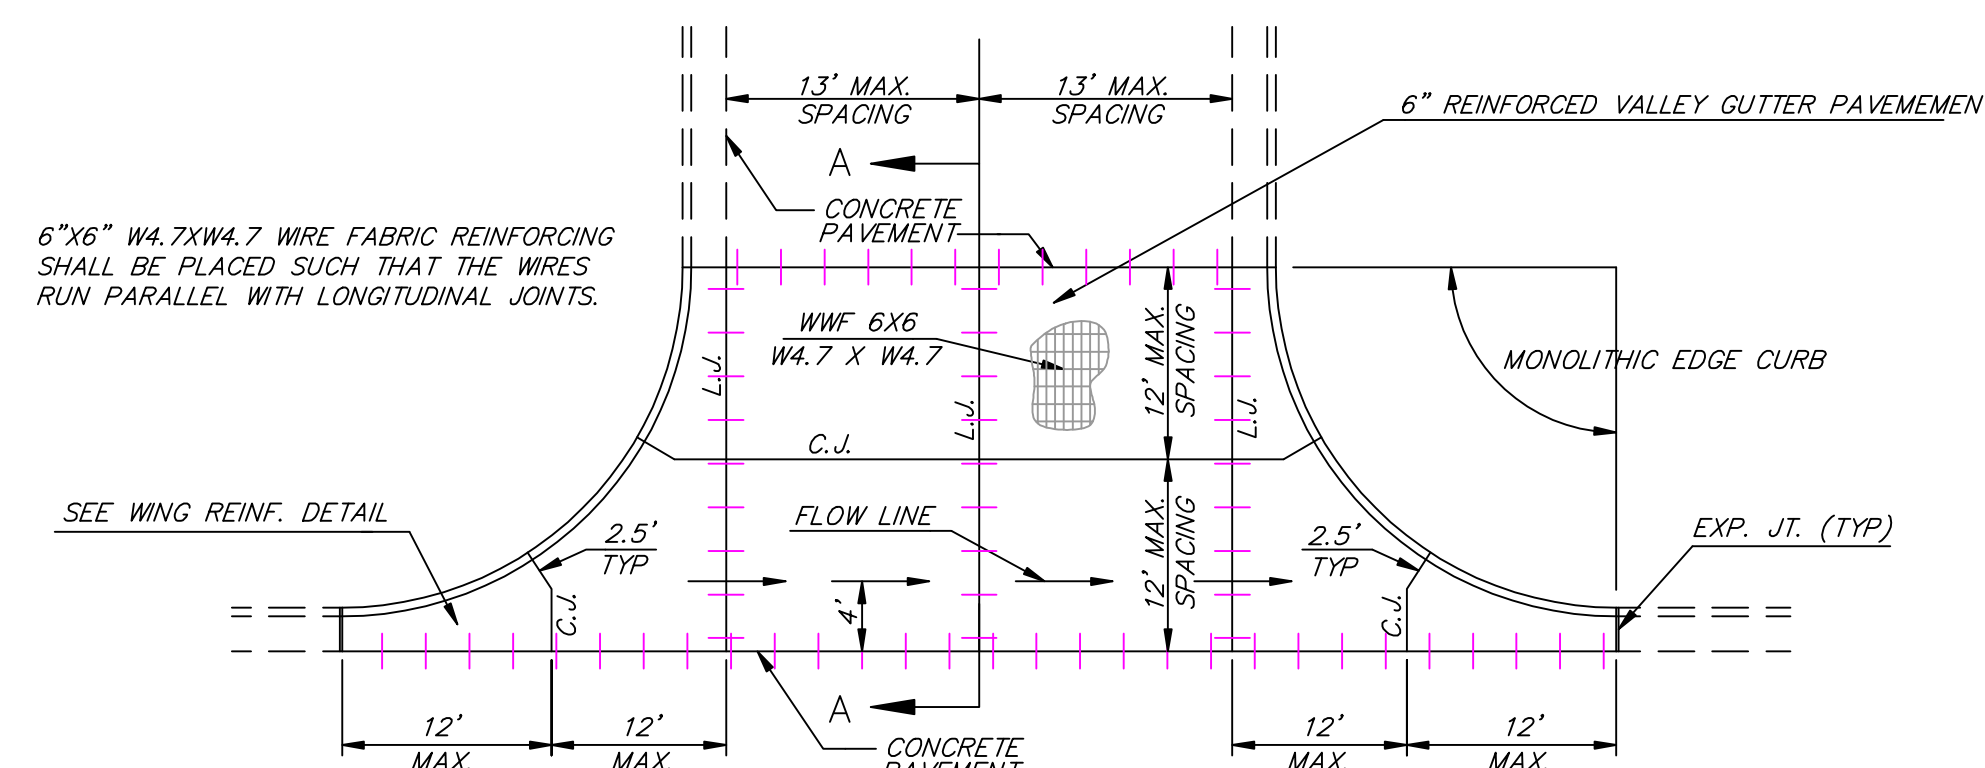

REINFORCED VALLEY GUTTER PLAN, TYP.



WDM Architects P.A.
105 North Washington
Wichita, KS 67202-2
T 316.262.4700
F 316.262.0002
wdmarchitects.com

we do more

Neurology Consultants of Kansas

Wichita, Kansas

PRINTS ISSUED
06/08/09 Concept Review
06/29/09 Preliminary Review
08/14/09 Permit Submittal
10/12/09 For Construction

WDM No. 08135 drawn: ELS checked: CRY

MISC. DETAILS

C4

YOUNG & ASSOCIATES, P.A.
Professional Civil Engineering Consultants
100 South Georgia, Derby, Kansas 67037
tele: (316)788-2552, fax: (316)788-4408, email: youngpa@nemah.com

copy: 8809 WDM Architects P.A.