
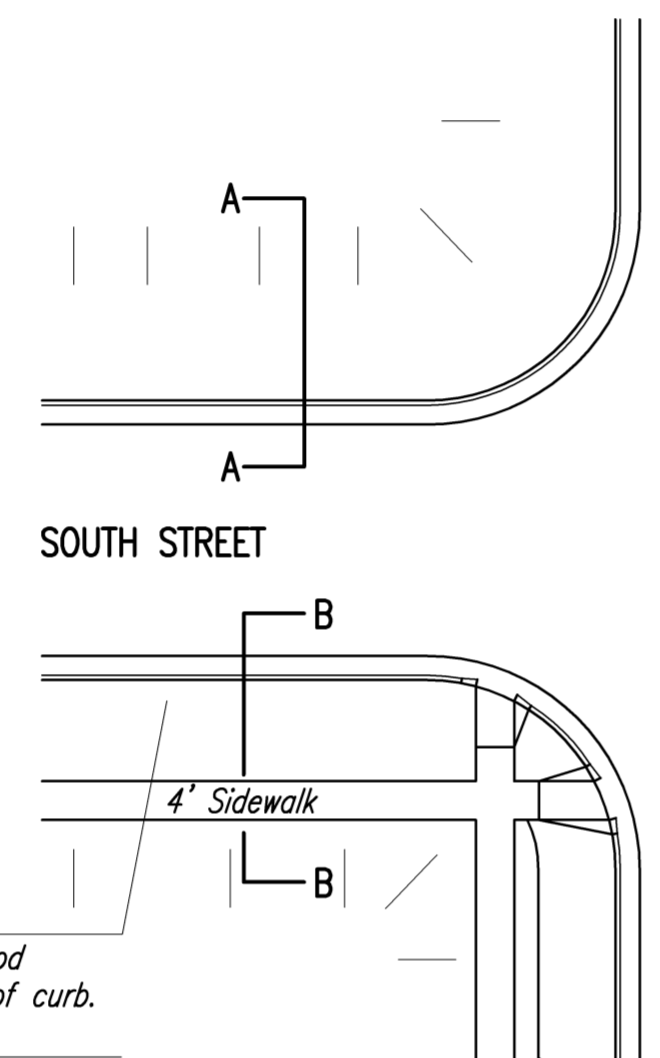
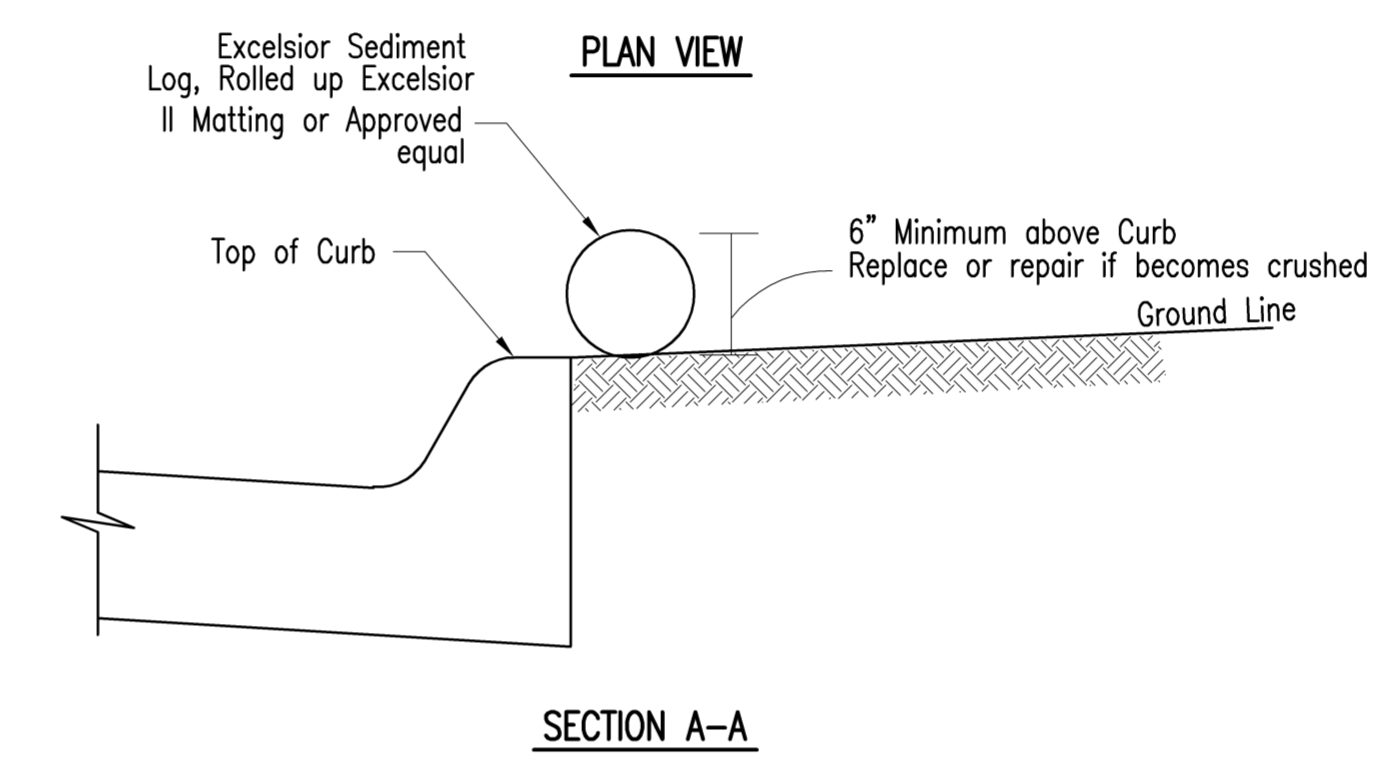
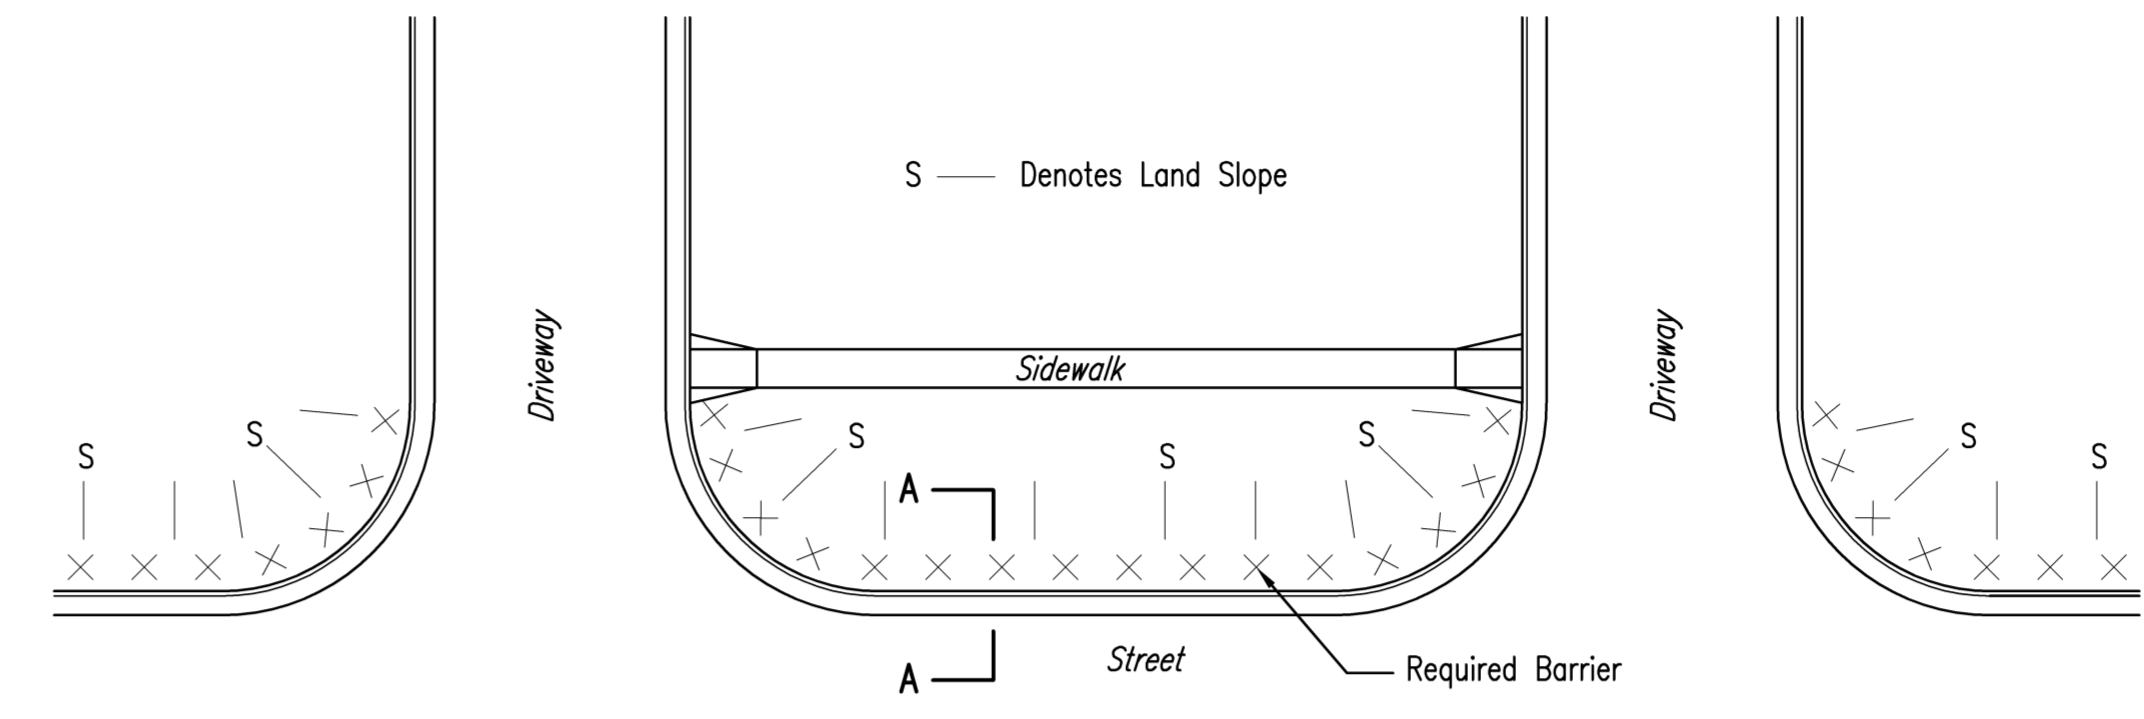


FHWA REG. NO.	STATE	PROJECT NO.:	YEAR	SHEET NUMBER	TOTAL SHEETS
7	KANSAS	87 N-0502-01	2009	75	228
A.R.R.A-N050(201)					

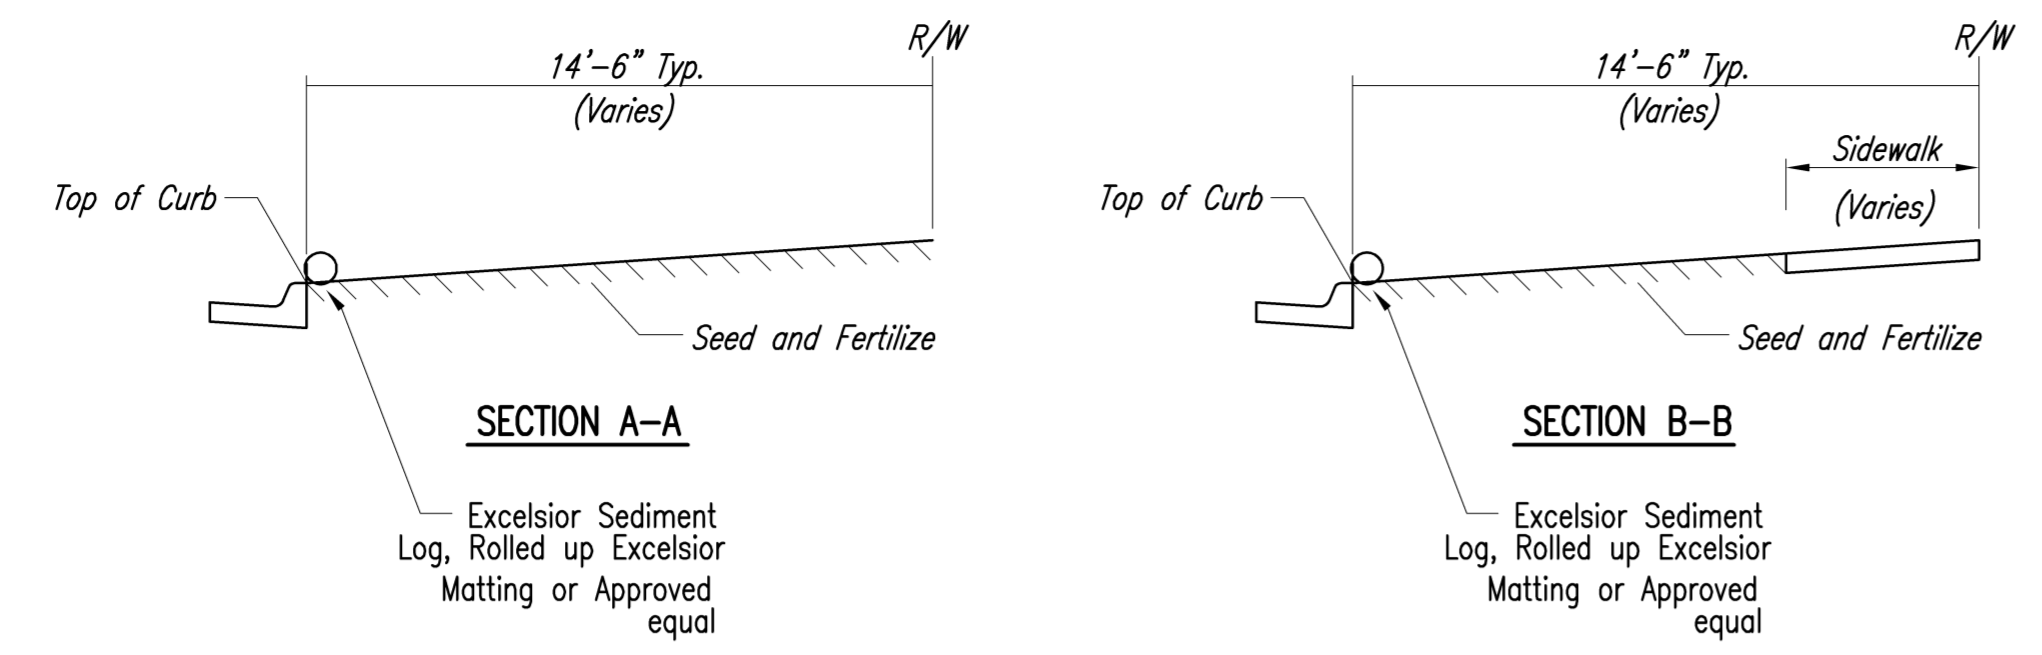


Install Sediment Log/Roll or Sod on prepared surface at back of curb. (See details)

- NOTES:**
- EXCELSIOR LOG/ROLL TO BE INSTALLED WHEN SOD IS NOT SPECIFIED ON PROJECT.
  - AFTER INSTALLATION OF LOG/ROLL, AT LOCATIONS WHERE CONCENTRATED FLOW CARRIES SEDIMENT OVER THE CURB AND INTO THE GUTTER, SUPPLEMENTAL EROSION CONTROL DEVICES WILL BE INSTALLED BY THE CONTRACTOR AS NEEDED, TO FIX THE PROBLEM.

- NOTES:**
- Barriers must be placed back of curb along street and up the driveway sufficiently to catch all sediment from the yard.
  - Anchor to ground every 30" with a 7" min. long staple.
  - Remove accumulated sediment when within 2 inches of top of device.
  - Replace/repair all broken/damaged sediment logs/rolls to maintain effectiveness of device.
  - Sediment logs/rolls can be driven over for access to the site. They need to be picked up and put back down after they have been compacted by any traffic to maintain effectiveness of BMP. Replace as needed per original design.

**BACK OF CURB PROTECTION DETAIL**

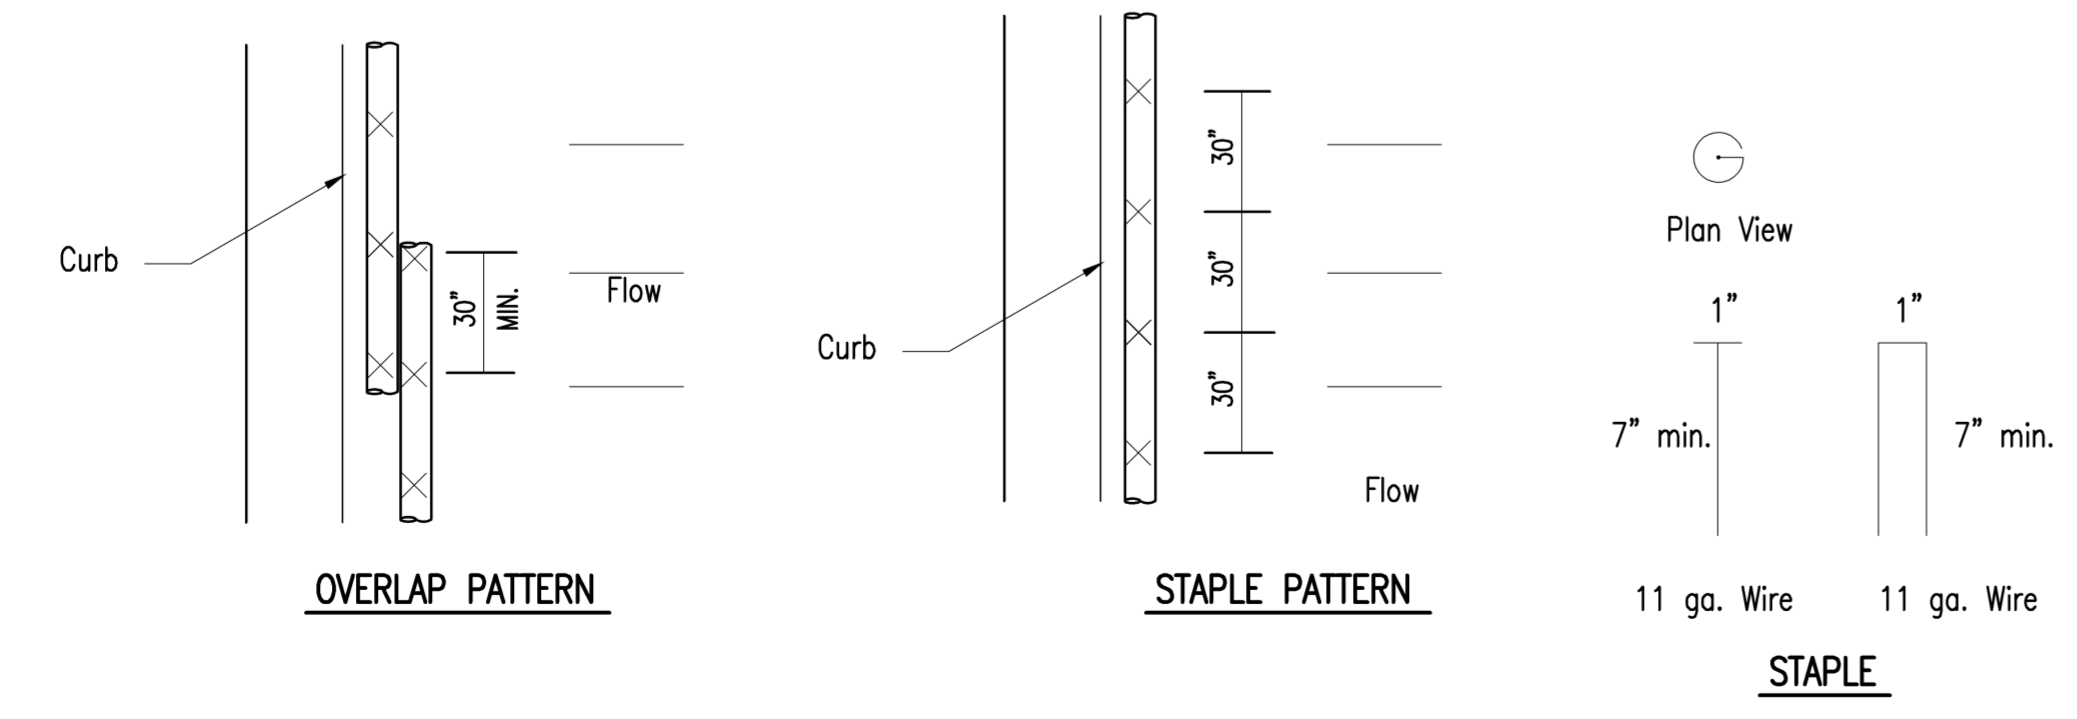

**DETAILS FOR SEDIMENT LOG/ROLL**

**SEDIMENT LOG BARRIERS**

**NOTES:**  
FOLDED Excelsior matting will not be accepted.



SOIL EROSION BMPs  
**BACK OF CURB SEDIMENT BARRIER DETAILS**  
SCOTT LINDEBAK, P.E.  
STORM WATER ENGINEER  
PROJECT NUMBER: OCA NO.  
DATE: SEPT 2009  
Sheet 75 of 228

MAIZE ROAD  
WEST KELLOGG AVE. TO PAWNEE AVE.  
CITY OF WICHITA, KANSAS  
EROSION CONTROL DETAILS

POE & ASSOCIATES, INC.  
CONSULTING ENGINEERS  
5940 E. Central, Suite 200 • Wichita, KS 67208-4242  
Phone: 316/685-4114 • FAX: 316/685-4444

Engineer: P. FERGUSON  
Designer: K. WARREN  
KDOT Job No.: 87 N-0502-01  
Poe Job No.: 1935  
Date: SEPTEMBER 2009