

STORM WATER SEWER NO. 138

CITY OF WICHITA, KANSAS



R. W. LINN CITY ENGINEER

PROJECT NO. 468-76-245-80576-000-000-001

DATE: _____




GENERAL NOTES

1. CONTRACTOR SHALL TAKE ALL NECESSARY PRECAUTIONS AND AS DIRECTED BY THE FIELD ENGINEER, SUCH AS SHORING, SHIELDING, ETC., TO INSURE THAT ALL TREES IN THE VICINITY OF CONSTRUCTION ARE PROTECTED FROM INJURY. ALL EXISTING TREES IN THE VICINITY OF THE PROJECT AREA SHALL BE SAVED. COST OF SAVING THESE TREES, IF ANY IS TO BE CONSIDERED INCIDENTAL TO PROJECT.
2. ENGINEER SHALL TAKE TIES TO ALL IRONS IN THE VICINITY OF THE PROJECT AREA PRIOR TO CONSTRUCTION. ALL IRONS SHALL BE REPLACED AFTER THE CONSTRUCTION.
3. THE LIMITS OF CONSTRUCTION IS APPROXIMATELY 1.0 FOOT BEHIND CURBS AT BOTH EAST AND WEST SIDE OF VICTORIA STREET TO SAVE THE TREES FROM ANY INJURY. THE LIMIT MAY BE EXTENDED AT THE DIRECTION OF THE FIELD ENGINEER AS LONG AS TREES ARE NOT DISTURBED. ALL DISTURBED OR EXCAVATED AREAS IN PARK ARE TO BE RESEDED.
4. CONTRACTOR SHALL NOTE THAT STREET STATION 2 + 40 IS AT NORTH END OF PAWNEE AVENUE.
5. ALL CORRUGATED METAL PIPES USED FOR THIS PROJECT SHALL BE HELICALLY CORRUGATED METAL PIPES.
6. ALL CONCRETE UNLESS OTHERWISE NOTED SHALL BE "2-SACK CONCRETE". THIS INCLUDES CONCRETE FOR THE CURB AND GUTTER.
7. PAVEMENT REMOVAL LIMITS ARE PAINTED ON THE JOB SITE. THE CONTRACTOR SHALL BE PAID FOR REMOVING AND REPLACING ONLY THAT QUANTITY OF PAVEMENT, SIDEWALK, AND DRIVEWAY WHICH IS PAINTED PRIOR TO CONSTRUCTION. ANY CHANGES SHALL BE AT THE DIRECTION OF THE FIELD ENGINEER.

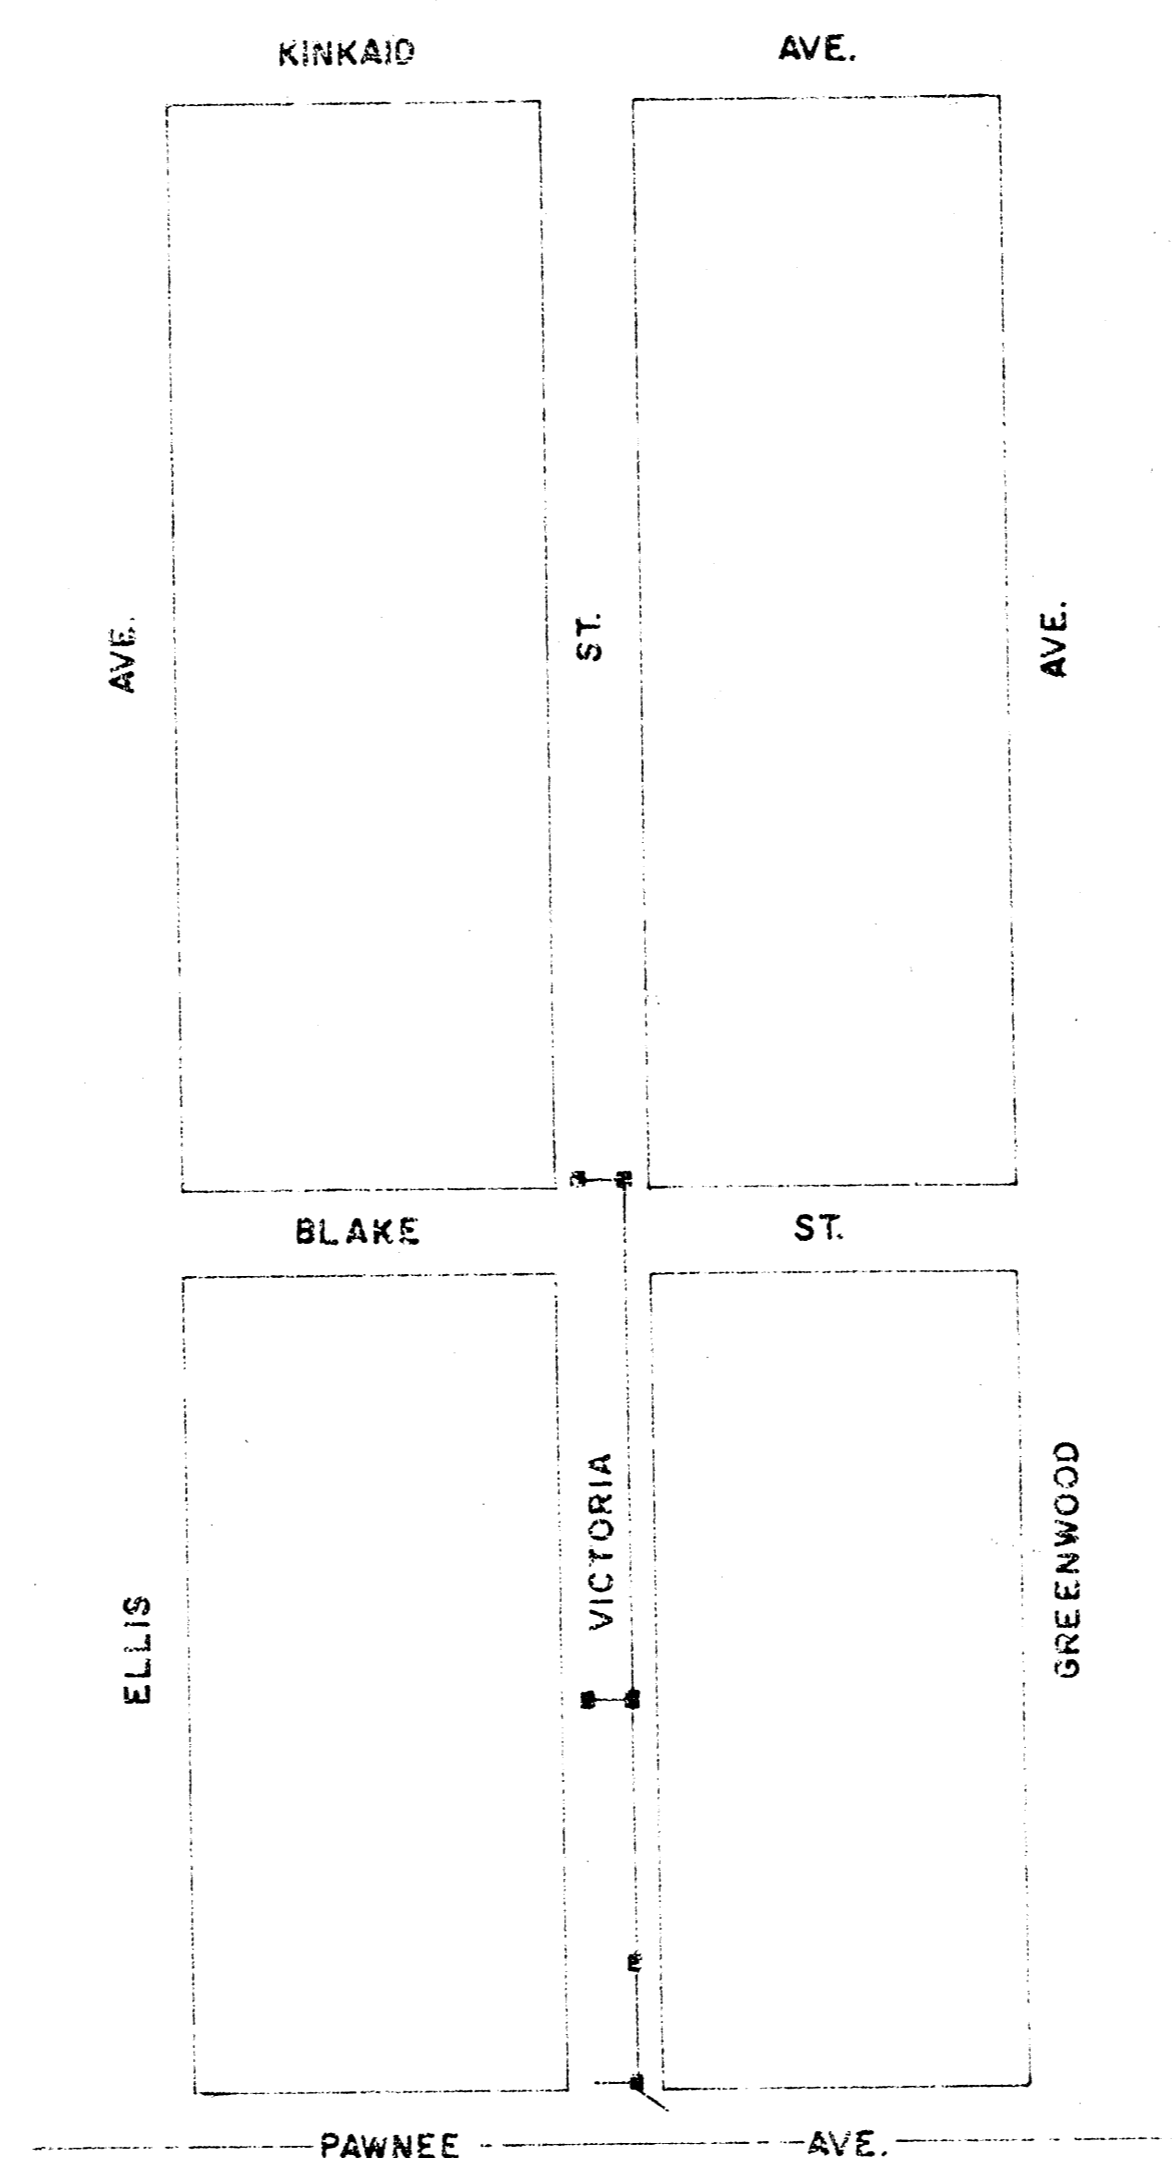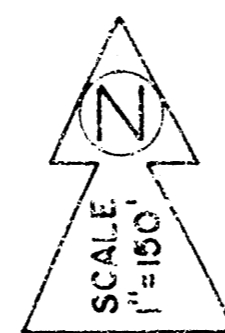

INDEX

- 1 Cover
- 2-3 Plan-Profile
- 4 Standard Type 10 Inlet

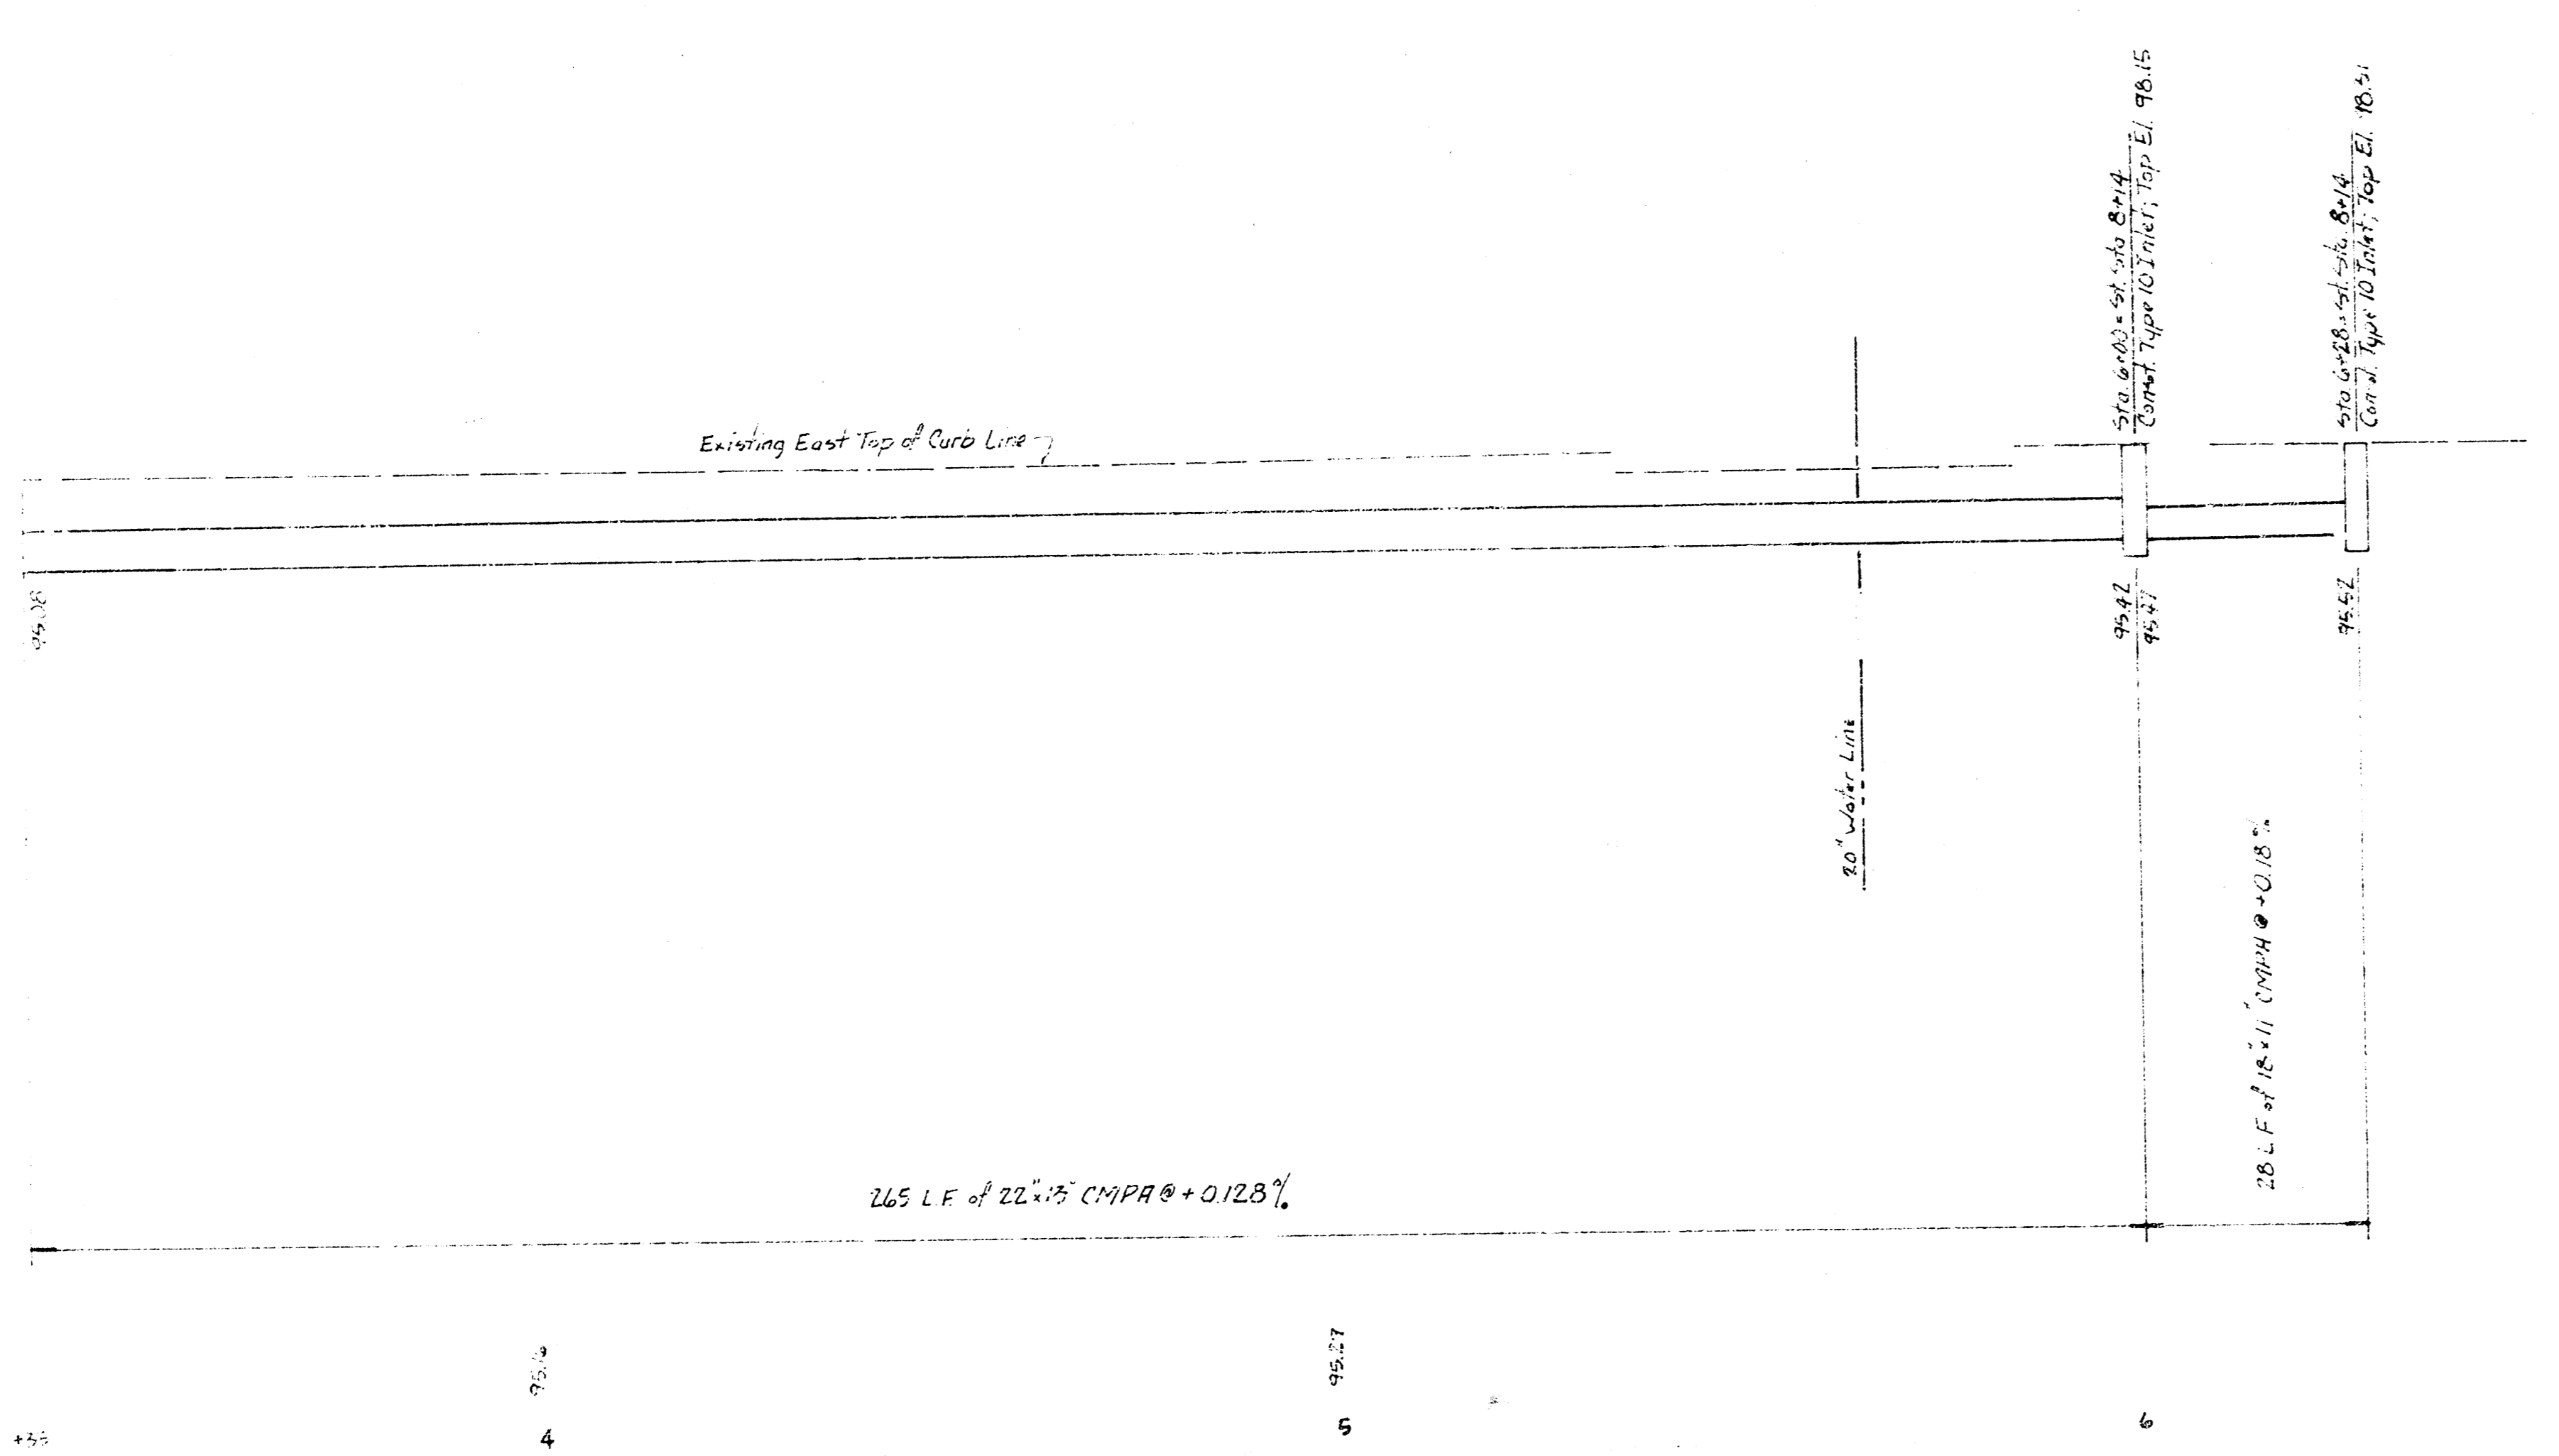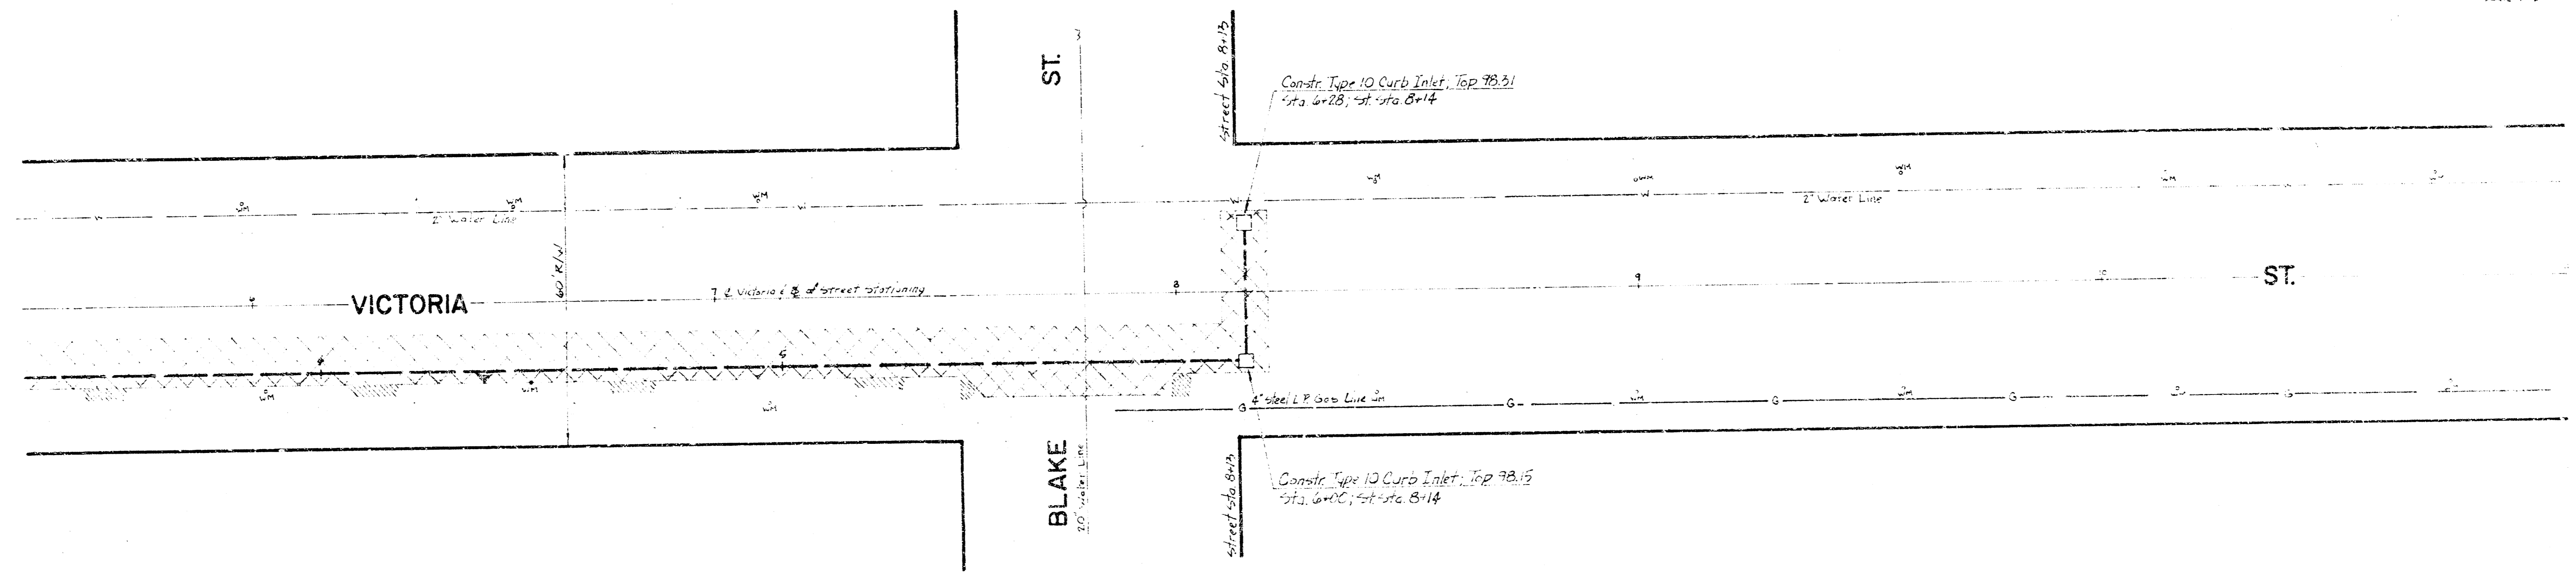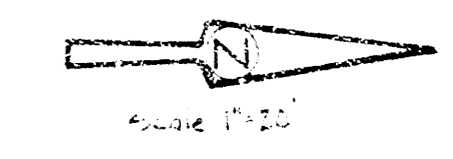

Vertical
Elevation
DGP 161

14 10

6/25/23 [Signature]