


LAWRENCE LANE

SL ROCKHURST 3RD TO NL ROCKHURST 3RD

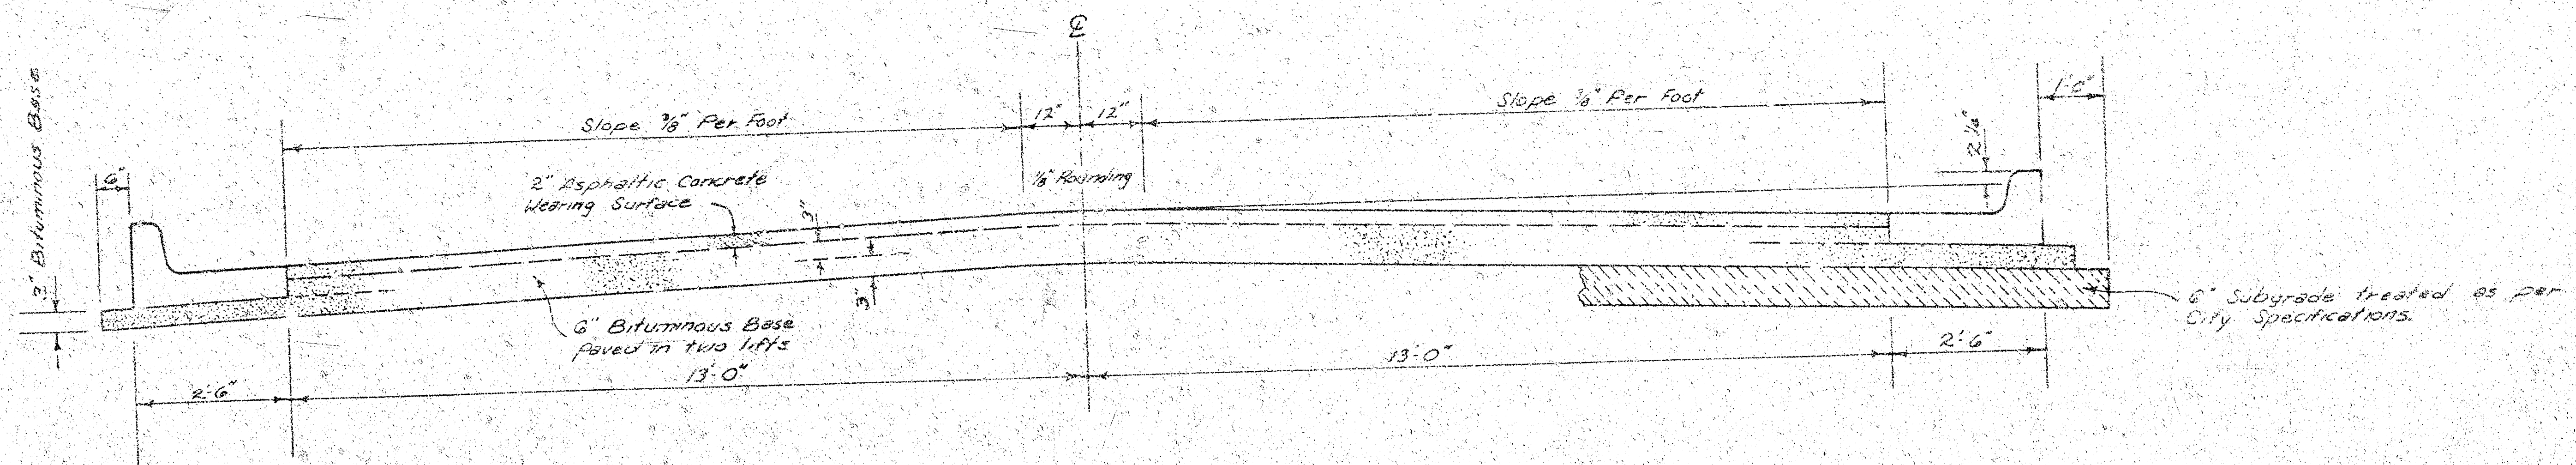


TYPICAL SECTION

31' ASPHALTIC CONCRETE PAVEMENT WITH BITUMINOUS BASE

A TACK COAT OF EMULSIFIED ASPHALT (SS-1H) SHALL BE APPLIED AT AN APPROXIMATE RATE OF 0.05 GALLONS PER SQ. YD. BETWEEN LIFTS OF ASPHALTIC MATERIALS WHEN ORDERED BY THE ENGINEER. TACK COAT WILL NOT BE PAID FOR DIRECTLY AND SHALL BE CONSIDERED AS SUBSIDIARY TO PRICE BID FOR ASPHALTIC PAVEMENT. BITUMINOUS BASE AND ASPHALTIC CONCRETE WEARING SURFACE SHALL BE PLACED WITH A LAYDOWN MACHINE HAVING AUTOMATIC ELECTRONIC CONTROLS FOR CROWN AND GRADE. CONSTRUCTION JOINTS IN EACH LIFT SHALL BE STAGGERED A MINIMUM DISTANCE OF 1' WITH JOINTS IN PRECEDING LIFTS AND SUCH THAT A JOINT WILL BE CONSTRUCTED ON THE PAVEMENT CENTERLINE IN THE TOP LIFT.

DETAIL OF TRANSVERSE CONSTRUCTION JOINTS

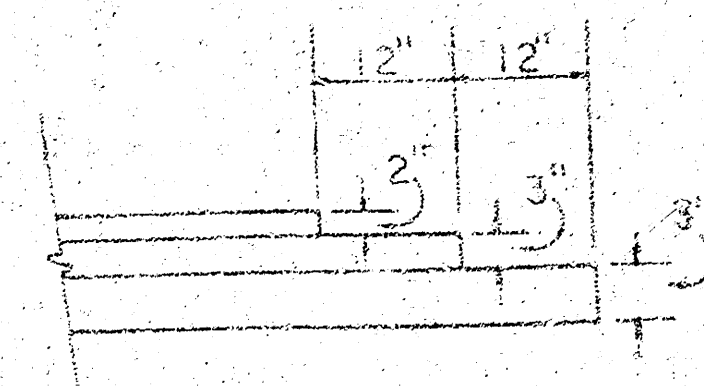

TRANSVERSE CONSTRUCTION JOINTS SHALL BE CONSTRUCTED IN FLEXIBLE BASE PAVEMENTS AT LOCATIONS WHERE PAVEMENT TEMPORARILY ENDS TO FACILITATE FUTURE PAVEMENT CONSTRUCTION. Laid down by Detail. THE COST OF CONSTRUCTING THE TRANSVERSE CONSTRUCTION JOINTS SHALL NOT BE MEASURED OR PAID FOR DIRECTLY BUT SHALL BE INCLUDED IN THE BID PRICE PER SQUARE YARDS OF ASPHALTIC CONCRETE PAVEMENT.

CITY OF WICHITA, KANSAS

DEPARTMENT OF PUBLIC WORKS -- ENGINEERING



R. W. LINN CITY ENGINEER

DATE: November 1976 PROJ. NO. DAKS 576067

DATE: November 1976 PROJ. NO. DAKS 576067

B.M. 197.82 City Std. Gouverneur & 13th St. No.
 41.5' N & 33' E of E. of both
 B.M. 202.02 RR spike W. Side Power Pole on
 W. Side Gouverneur approx. 30' N. of
 E. Lawrence Lane Ct.
 B.M. 185.96 "D" cut in top E. End conc. culvert,
 W. side drainage ditch on W. side Lawrence
 Lane approx. 1000' N of 13th St. No.

Baseline is WL. Lawrence Ln.

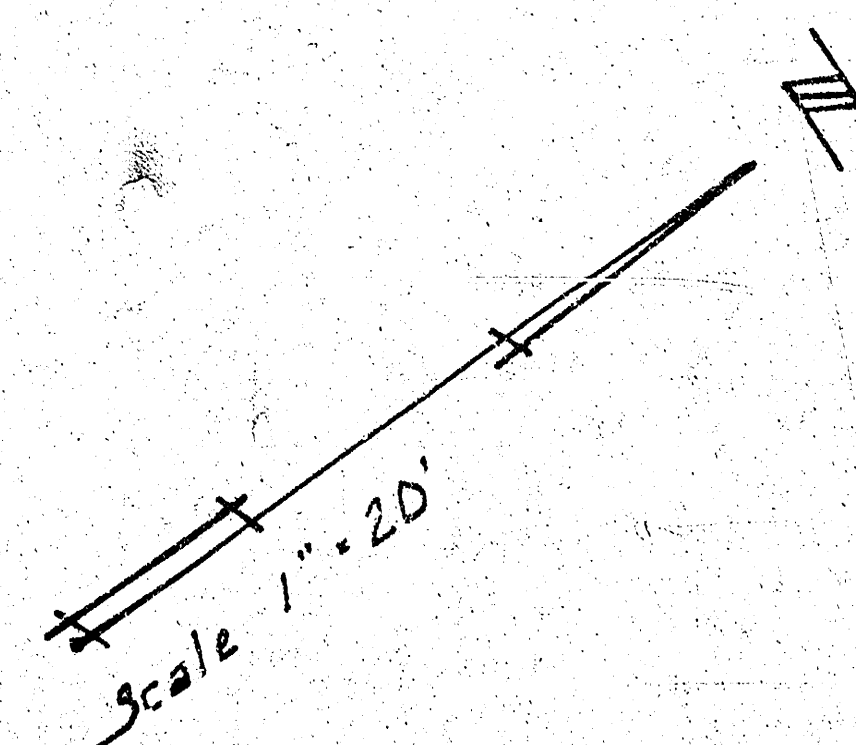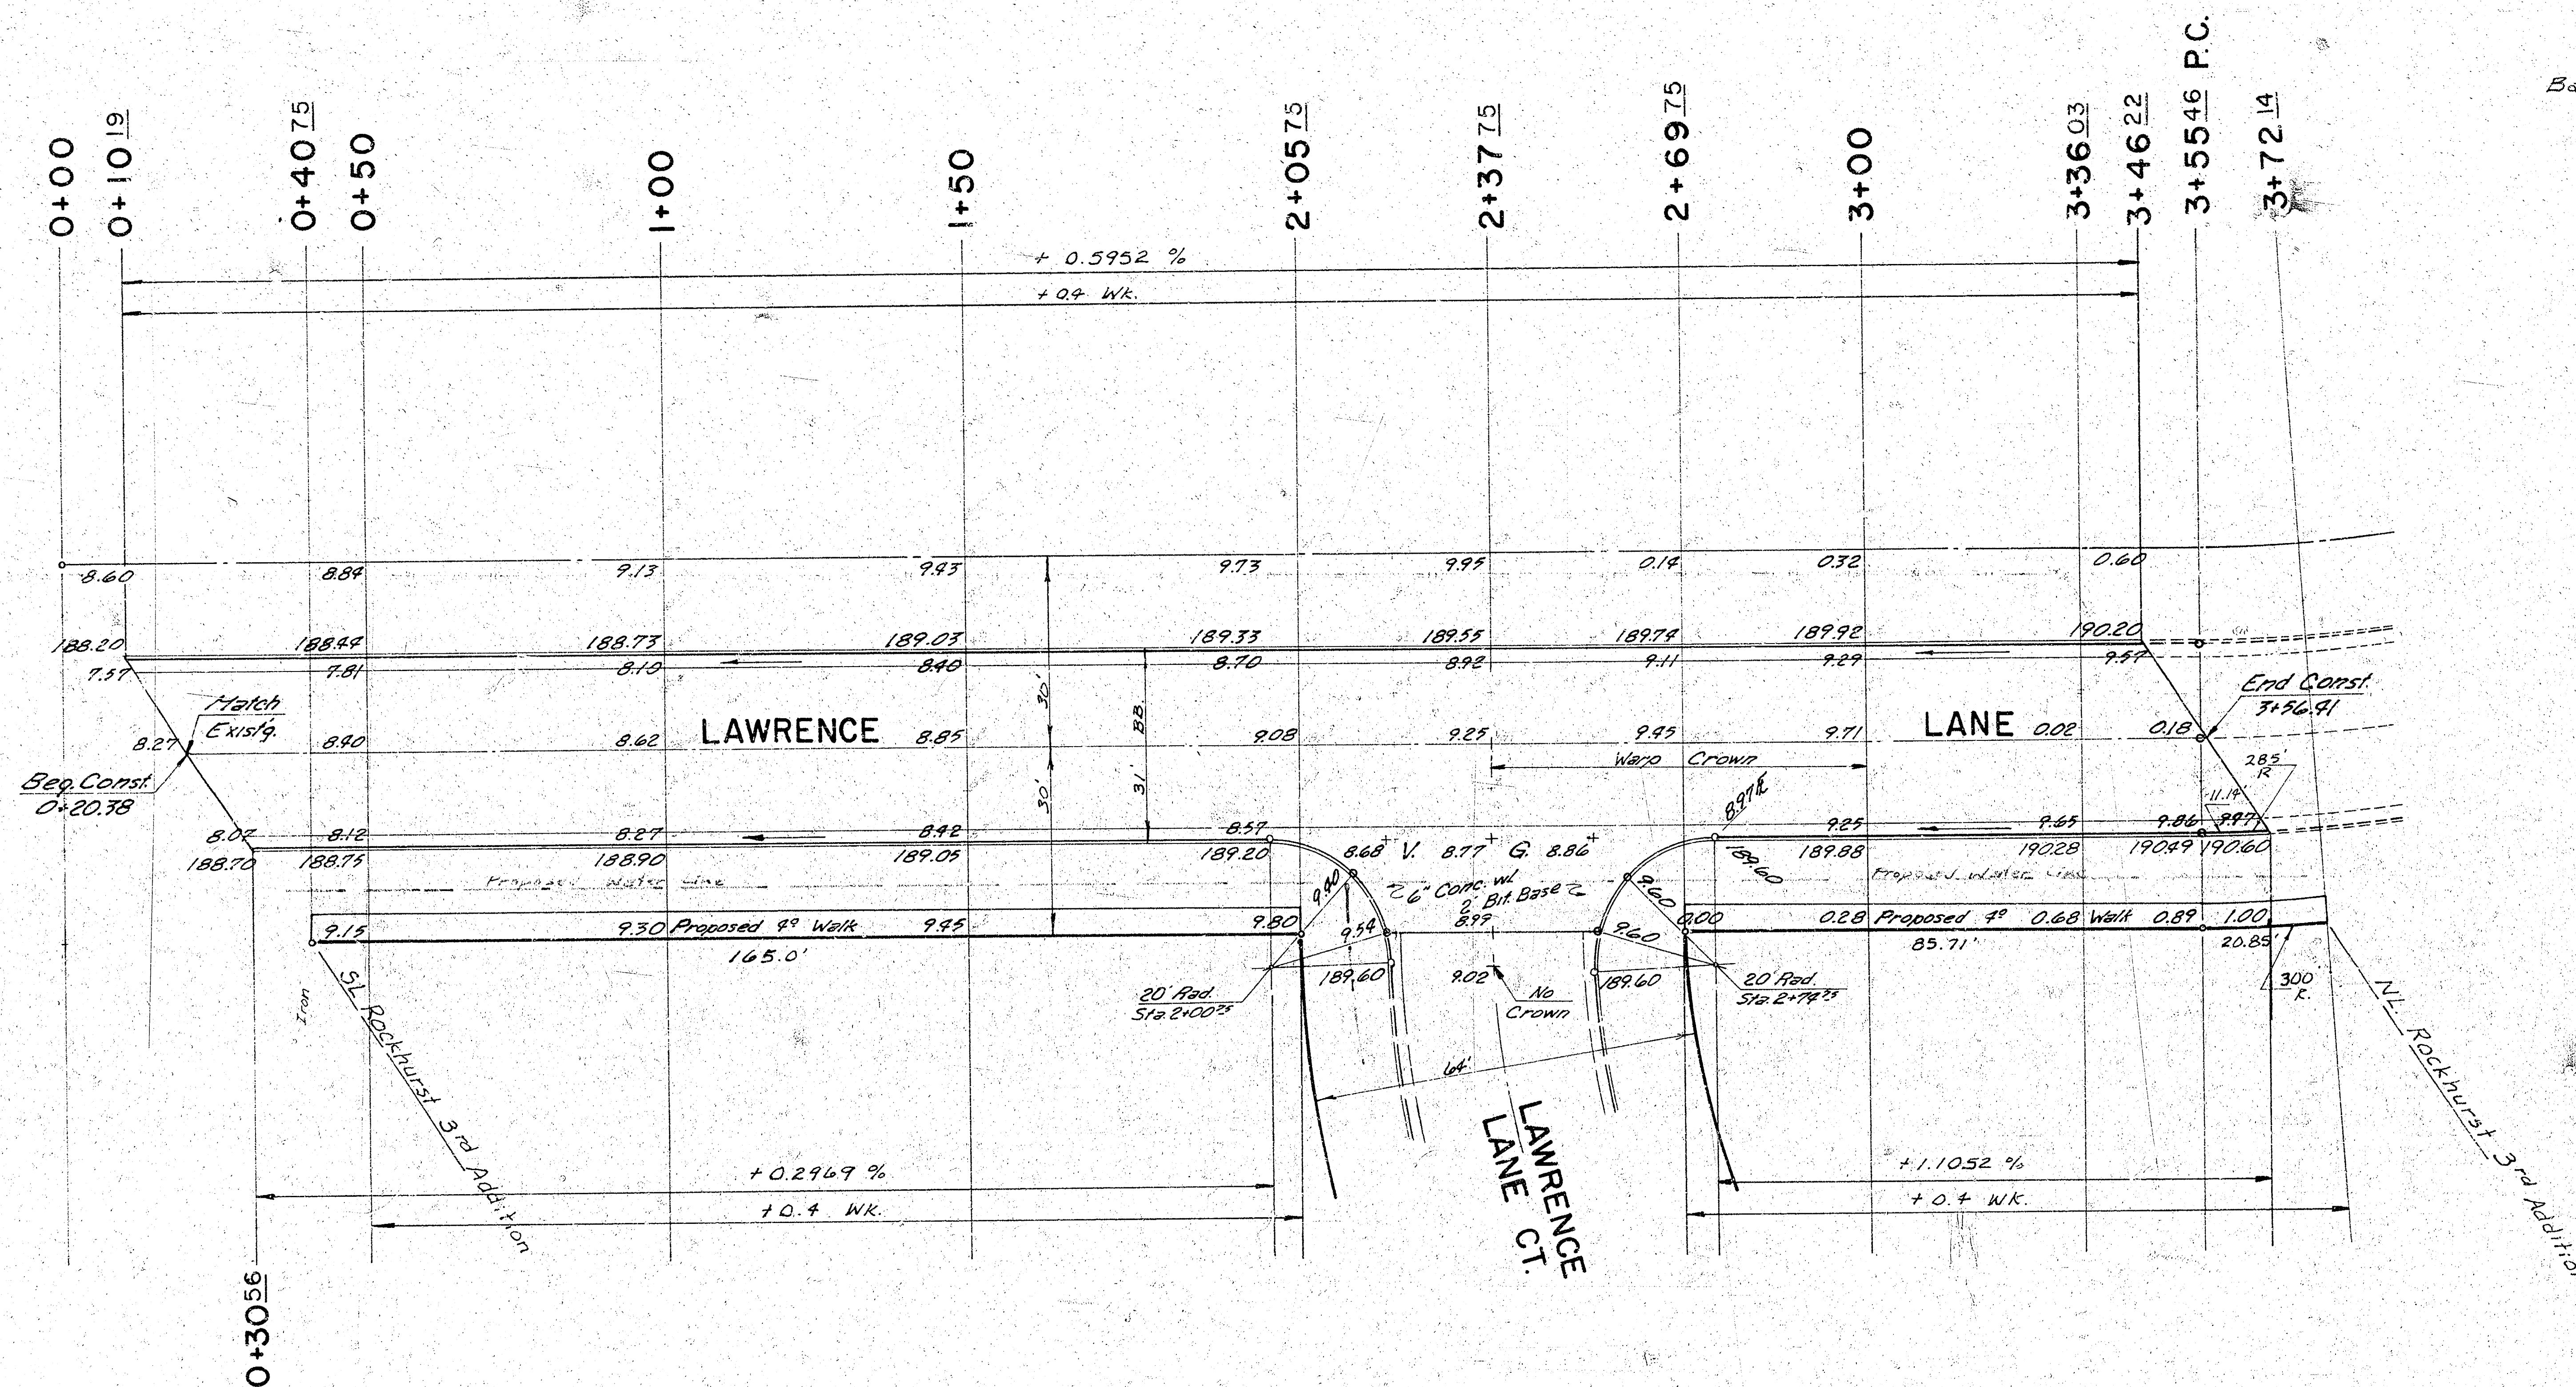


NOTE: Full height curbs to be constructed on this project.

SUB-GRADE
 TYPE OF CURB: 3' HIGH
 TYPE OF SIDEWALK: 6\"/>

NOTES TO BE OBSERVED: SEE DRAWING
 FOR ALL DETAILS AND SPECIFICATIONS
 TO BE USED IN CONSTRUCTION

Earthwork			
Property		City	
Excavation	152.5 Cu. Yds.	Excavation	254.1 Cu. Yds.
+ 10 %	15.3 Cu. Yds.	+ 10 %	25.4 Cu. Yds.
Total	167.8 Cu. Yds.	Total	279.5 Cu. Yds.
Comp. Fill	16.4 Cu. Yds.	Comp. Fill	0 Cu. Yds.
+ 10 %	1.6 Cu. Yds.		
Total	18.0 Cu. Yds.		
Manipulation	576.0 Sq. Yds.	Manipulation	766.6 Sq. Yds.

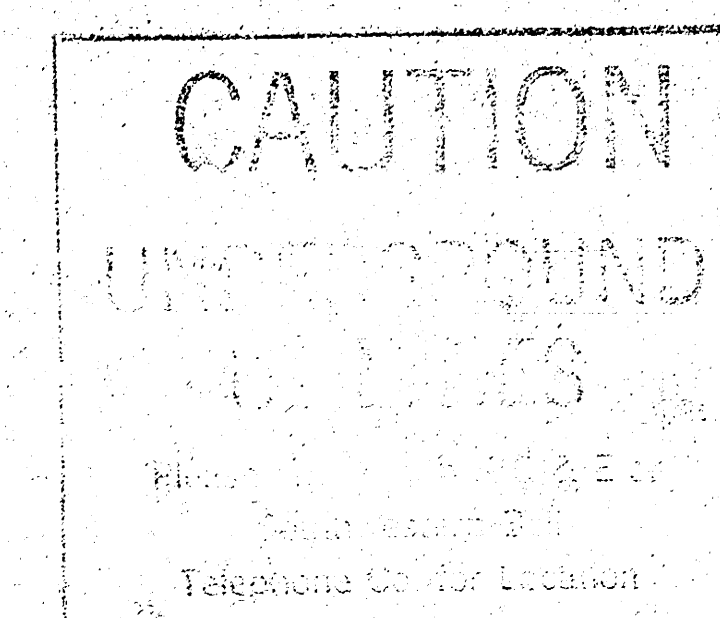


LAWRENCE LANE

SL to NL Rockhurst 3rd Addition
 31' Back to Back, 2" AC with
 6" Bit. Base w. Comb. Cb. & Gr.

CITY OF WICHITA

R. W. Linn City Engineer
 Project No. DAKS576067
 Date Nov 1970

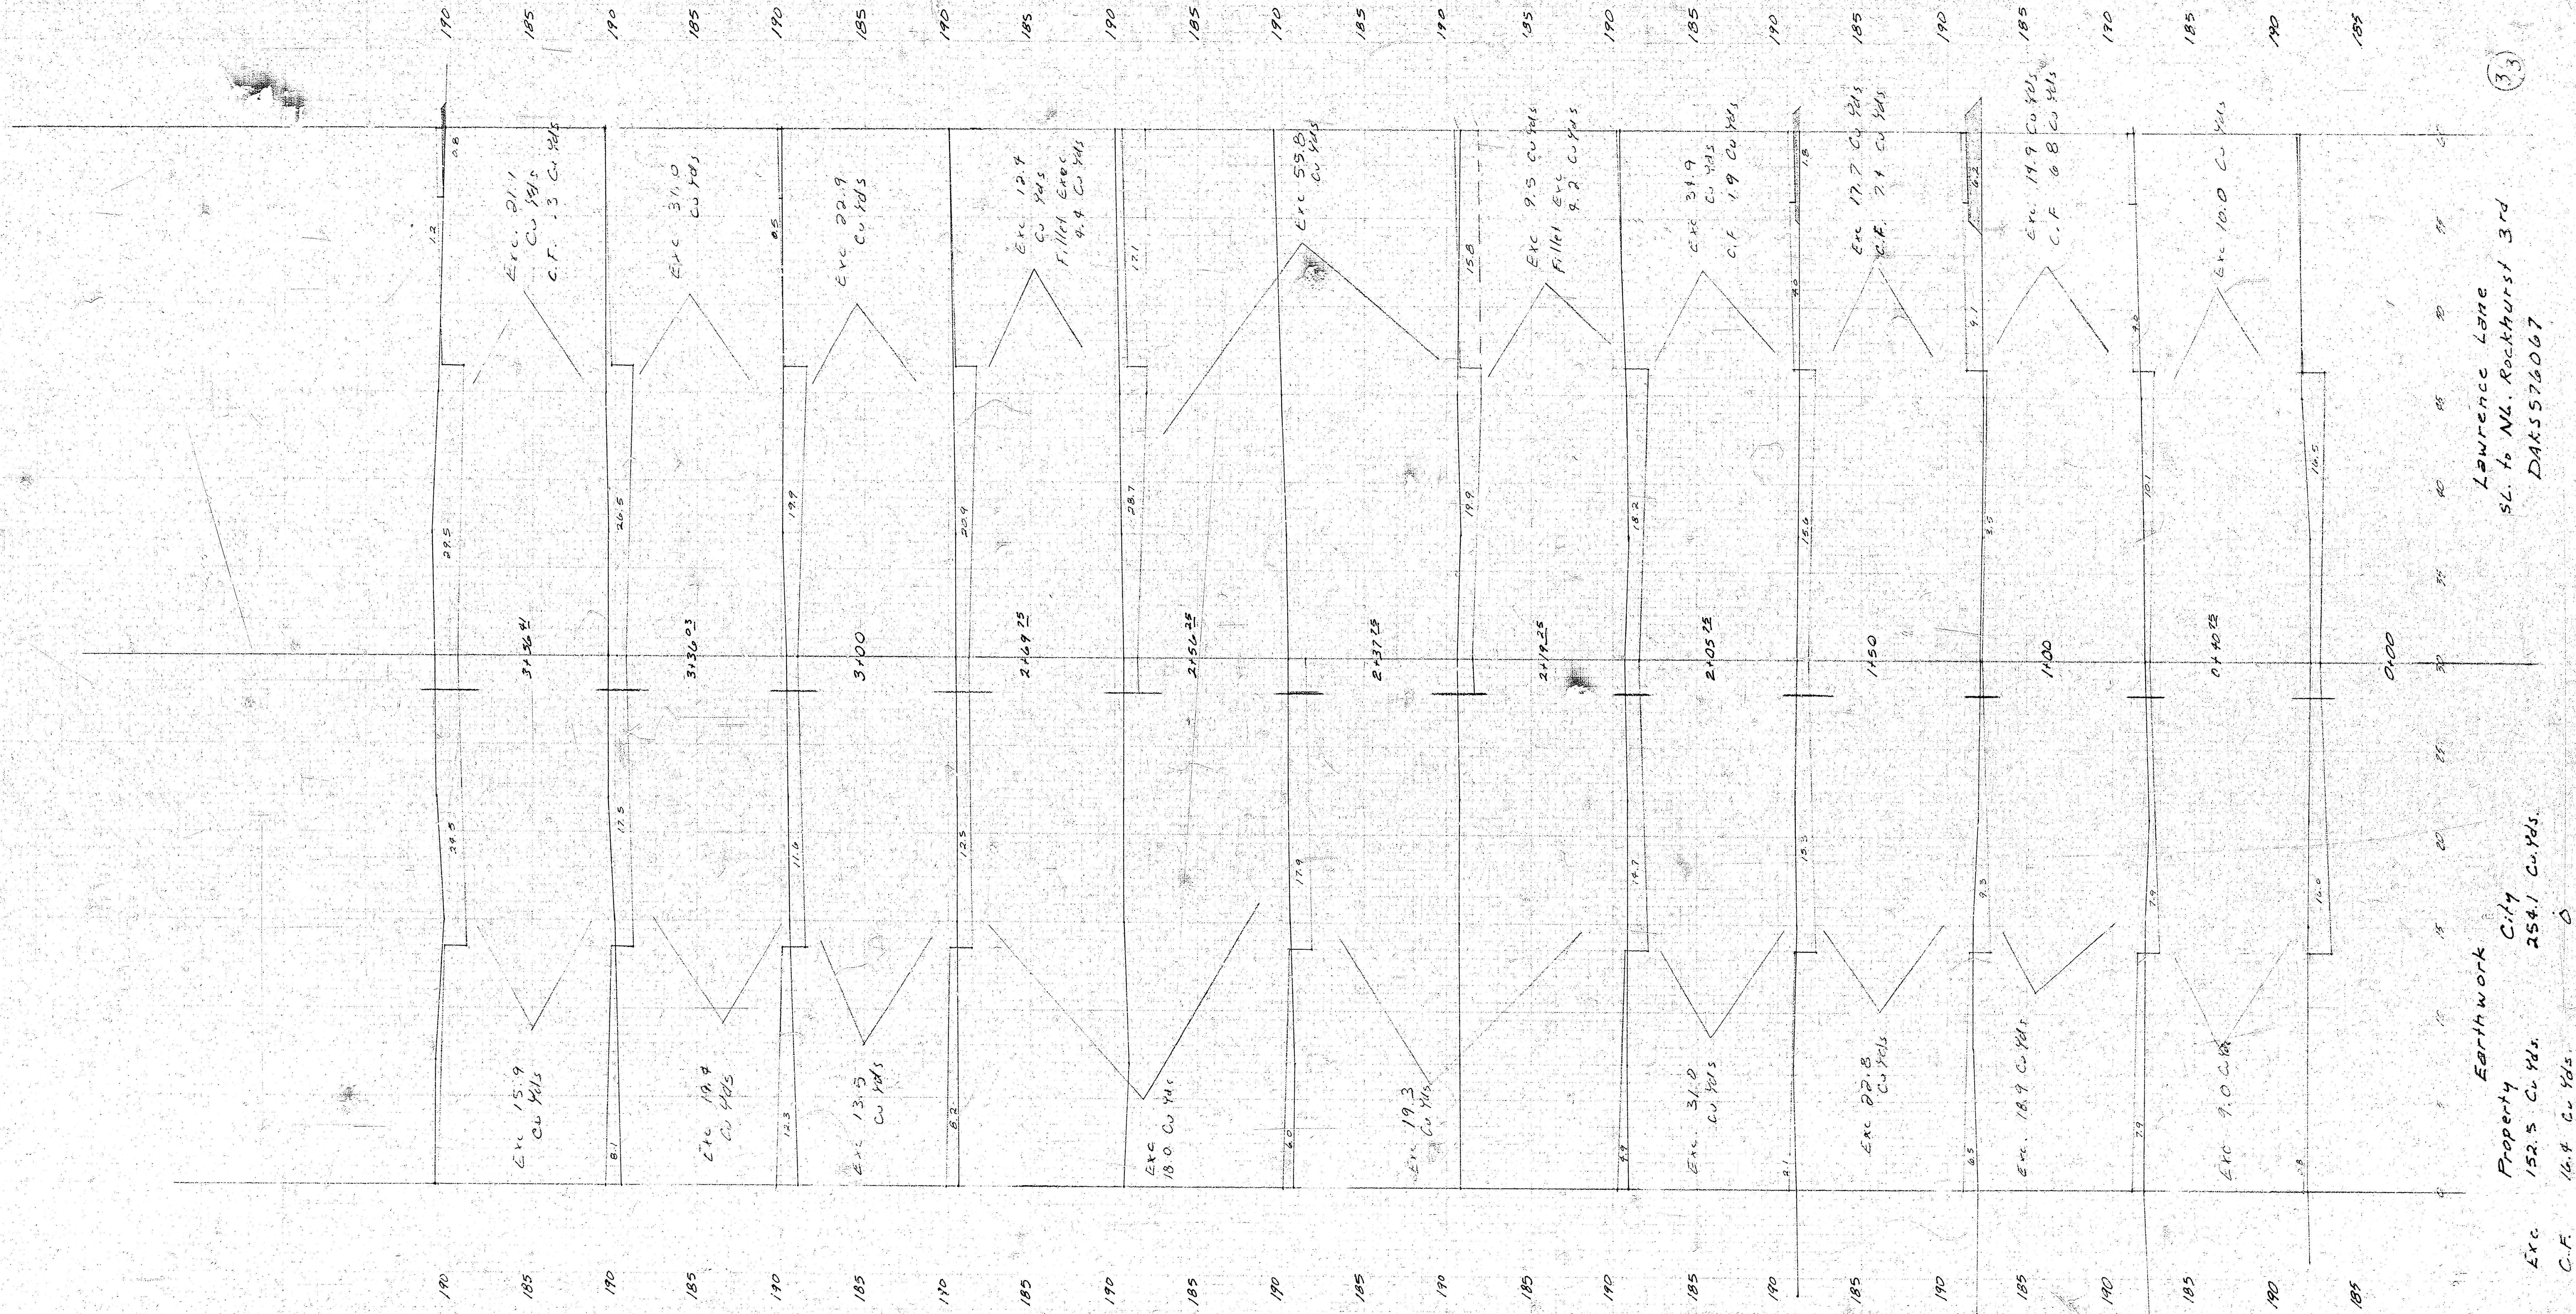

LOWELL LANE
SL. to NL. Rockhurst 3rd
DAK576067
(33)