

B. M. 109.48 Iron in Thimble N.L. Waterman & Rock Island Ry.

B. M. 108.51 R.R. Spike W.L. N.L.R.R. E.S. Washington @ N.L. Lewis west.

Stationing on ℄ Lewis St.

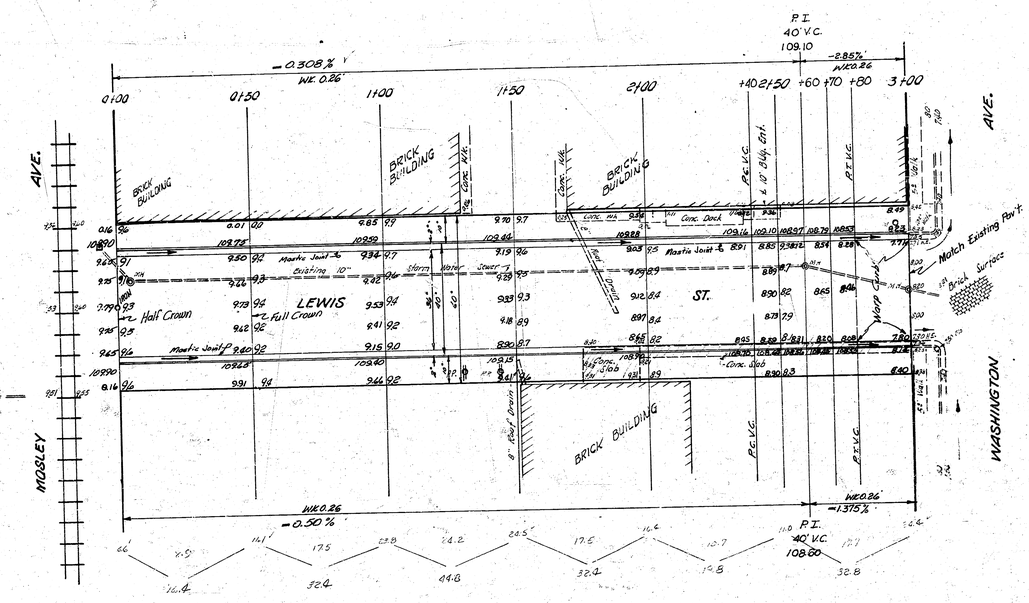

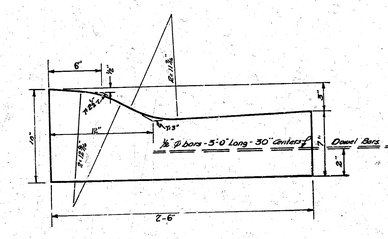

NON-STD. COMB. CURB & GUTTER DETAIL

To be poured with 6 sack concrete mix.

SCALE- 1"=1'-0"

Survey G. K. W.
Final A. G.
Esc
Checked JT

- Excavation Totals -

Property — C.I.P. —

178.6 — 0

Total 178.6 / 196.5 Cu yds

NOTICE TO CONTRACTOR & FIELD ENGINEER:

Concrete base to be poured out of 5 sack concrete mix. Warp curb from 0.3 to match existing from Sta 2+80 to Sta 3+00. Comb curb and gutter to be doweled to base. Take all necessary ties to replace iron & Mosley after Project is completed.

SCALE 1"=20'

B. E. SMITH LICENSED 436 KANSAS PROFESSIONAL ENGINEER

JULIUS H. EXPERSCHE 6811 KANSAS

LEWIS ST.

EL MOSLEY TO WL WASHINGTON

36-2-40' A.C.

CITY OF WICHITA, KANSAS

B. E. SMITH CITY ENGINEER

JUNE 1957 PROJ. NO. C16-76