
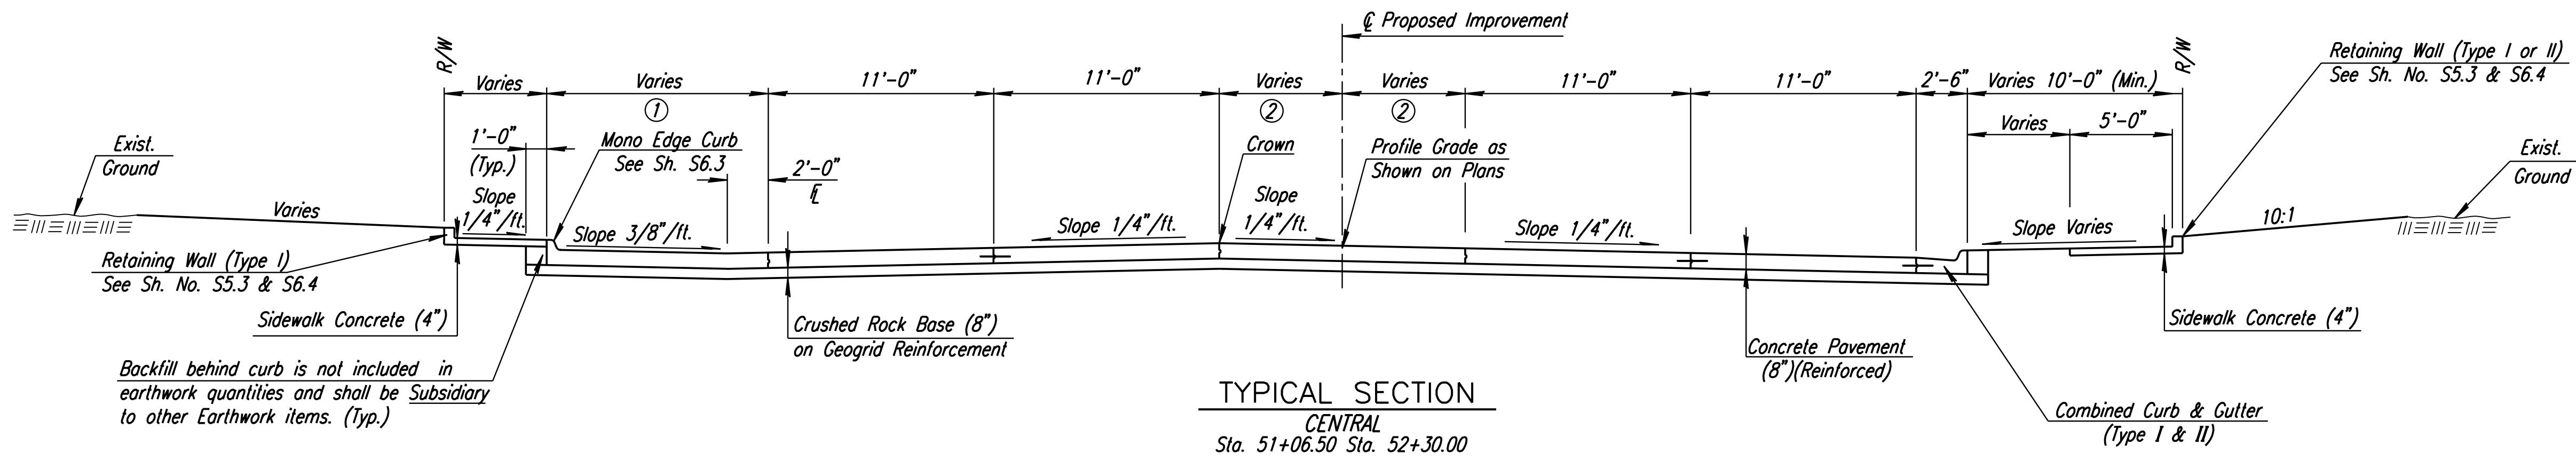


FHWA REGION NO.	STATE	PROJECT NO.	YEAR	SHEET NO.	TOTAL SHEETS
7	KANSAS	472-84071	2005	S2.3	

DATE	
BY	

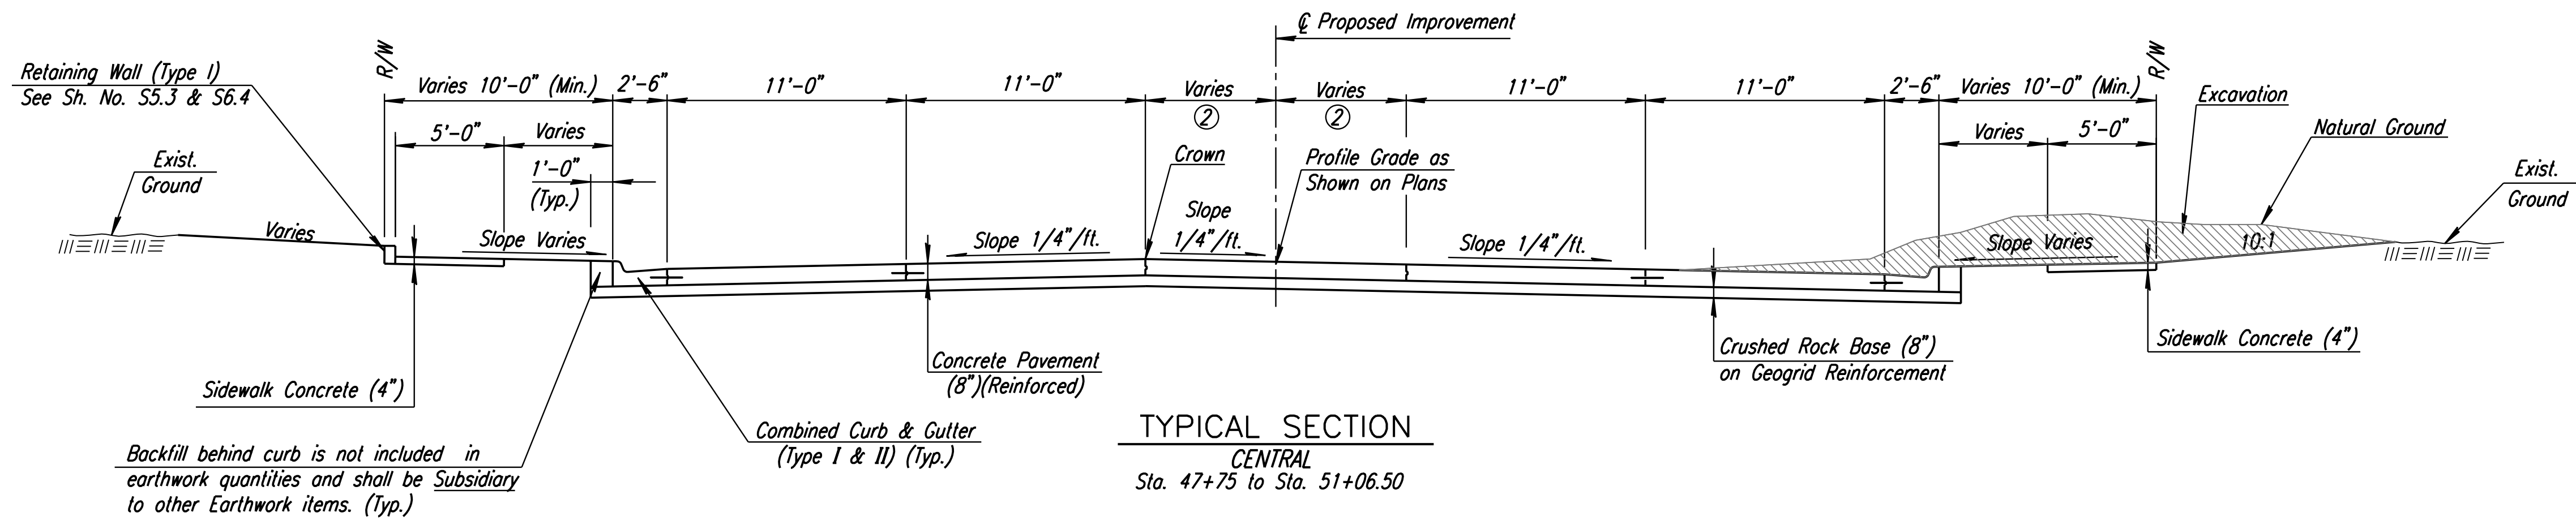

LEGEND

- ① Varies from 2'-6" at Sta. 51+06 to 10'-9" at Sta. 51+37.34
- ② Width varies from 5'-0" at Sta. 47+75 to 5'-6" at Sta. 48+00
Width varies from 5'-6" at Sta. 52+05 to 5'-0" at Sta. 52+30
- ⊛ Longitudinal construction joint and #4 x 3'-0" bars @ 2'-6" ctrs., where concrete pavement is constructed.
- **Combined Curb and Gutter (Type I and II) shall be 8" thickness when adjacent to concrete.
- ‡ Combined Curb and Gutter (Type I or II)(Special) shall conform to the Dimensions of Combined Curb and Gutter (I or II) except the gutter pan shall slope the same as the adjacent pavement.

- Notes:**
1. General Notes See Sh. S1.1
 2. Combined Curb and Gutter Details See Sh. S2.1.

Compaction Note:
The subgrade will be prepared in accordance with the city standard specification 401. This work will be *subsidiary* to the bid item "Crushed Rock Base (8") on Geogrid Reinforcement".

This sheet designed by:



3					
2					
1					
NO.	DATE	REVISIONS	BY	APP'D	
CITY OF WICHITA					
WICHITA CENTRAL CORRIDOR					
TYPICAL SECTIONS					
CENTRAL					
SHEET NO.	RWM	SCALE	SDM	APP'D	
DESIGNED	QUANTITIES	TRACED			
DESIGN CK.	DETAIL CK.	QUAN. CK.	TRACE CK.		

DSNR: RWM OPER: SDM SCALE: 1/1999/99189/BID SET 3/SHEETS/S2.3_TYP CENTRAL.DGN 10:27:16 LAST REV: 3-24-2004 BY: drp