



DATE	
BY	
REFERENCE NOTED	
REFERENCE CHECKED	

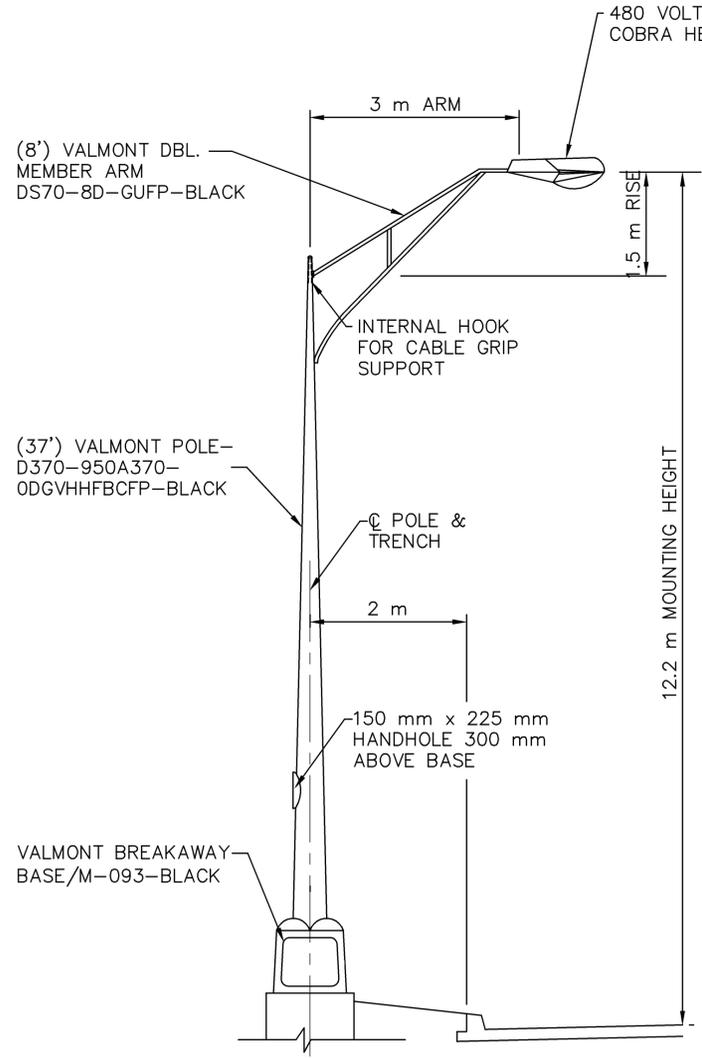


FRONTAGE ROAD
GROUND MOUNTED LIGHT POLE
WITHOUT SIDEWALK

(RAMP LIGHTS ON CONTROLLER C SIMILAR EXCEPT SINGLE MEMBER ARM)

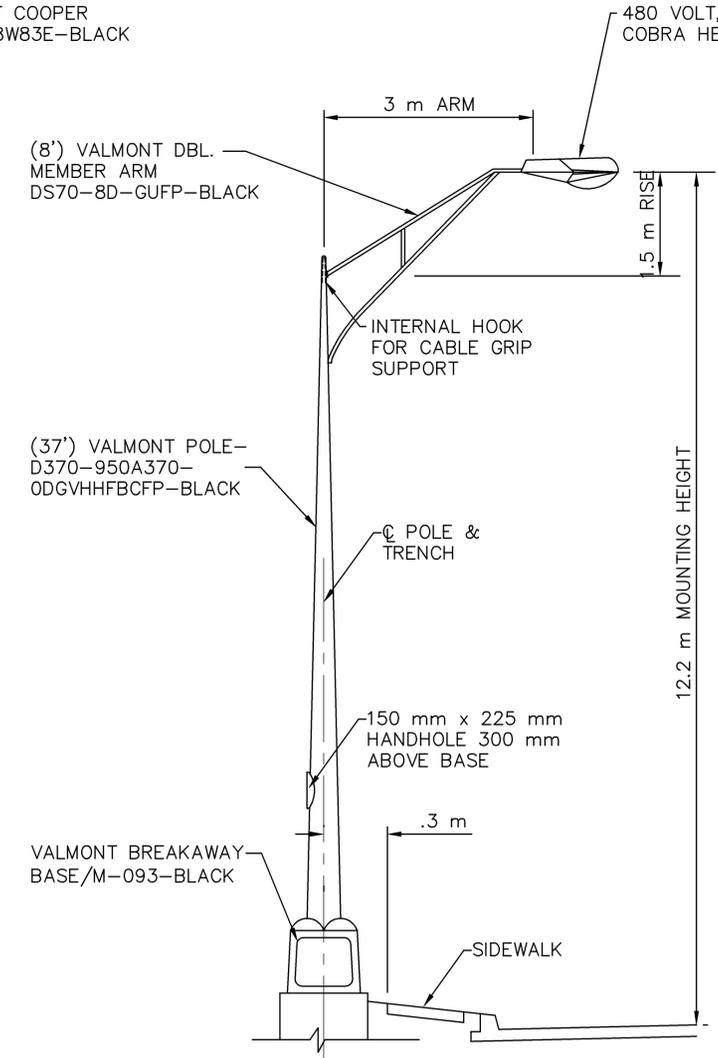

FRONTAGE ROAD
GROUND MOUNTED LIGHT POLE
WITH SIDEWALK

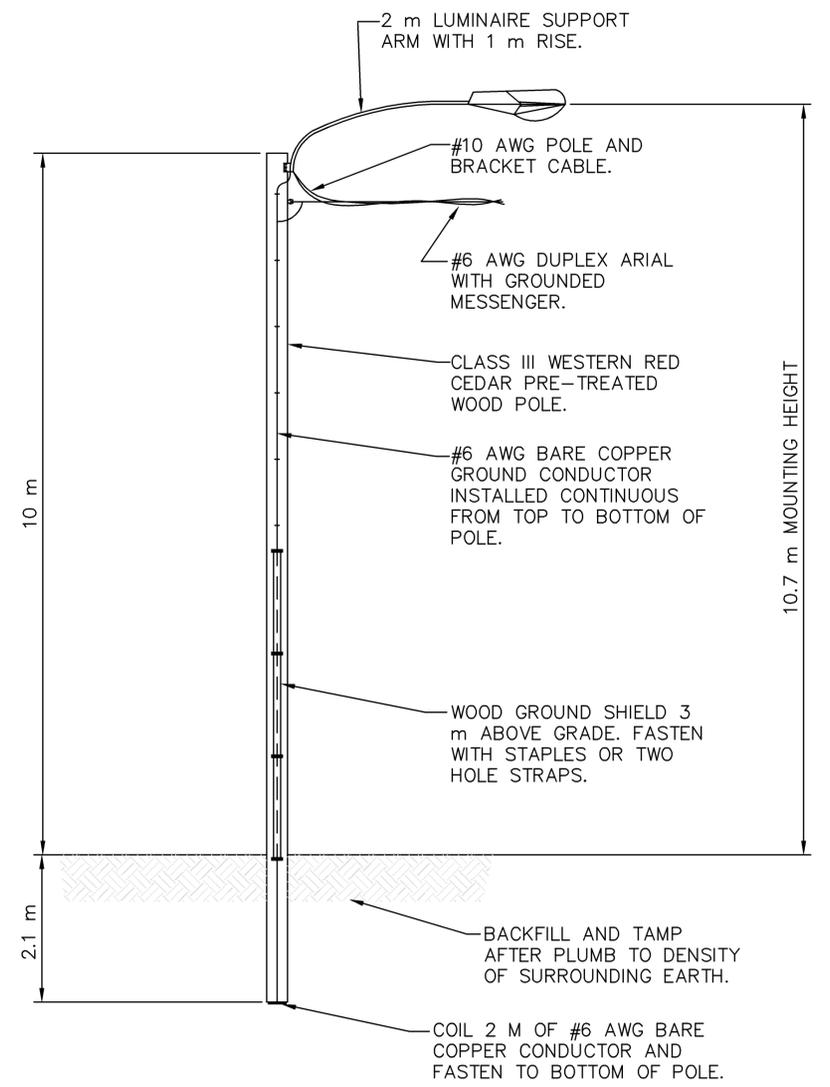

TEMPORARY LIGHT POLE

NOTES:

THE LIGHT POLE SHALL BE GROUNDED BY MEANS OF A #6 BARE AWG SOLID BARE COPPER GROUND WIRE BOLTED TO THE GROUNDING LUG INSIDE THE POLE SHAFT. THE GROUND WIRE SHALL BE CONNECTED TO THE GROUND ROD BY MEANS OF A GROUND ROD CLAMP.

POLES SHALL BE CAREFULLY SET, RAKED BACK TO PROVIDE A VERTICAL ALIGNMENT. THE ALIGNMENT OF THE POLES IS AN ESSENTIAL FEATURE OF THE INSTALLATION. THE WORK SHALL BE AS NEARLY PERFECT AS PRACTICAL AND NO PERCEPTIBLE TOLERANCE WILL BE PERMITTED.

SINGLE ARM RAMP LIGHTS TO MATCH MAINLINE IN STYLE AND MANUFACTURER. (CONTROLLER C)

GROUND MOUNTED MAINLINE LIGHTS (CONTROLLER C) SHALL MATCH (12.2 m MOUNTING HEIGHT) MAINLINE STYLE AND SHALL BE FURNISHED W/ BREAKAWAY BASE.

NOTES:

CABLE SPLICES SHALL BE SUITED TO THE CONDUCTOR AND SHALL BE WEATHERPROOF.

Drawn by: MZ22
Plotted: SCALE

NO.	DATE	REVISIONS	BY	APP'D.
1	5/15/03	Revised Plans Per Westar	LDS	RWW