




DATE	
BY	
REFERENCE NOTED	
REFERENCE CHECKED	

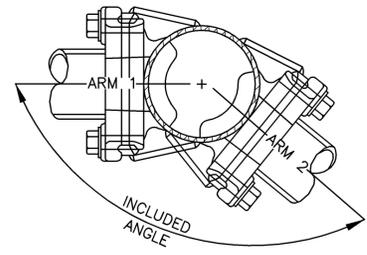


INCLUDED ANGLE DETAIL FOR DUAL MAST ARMS

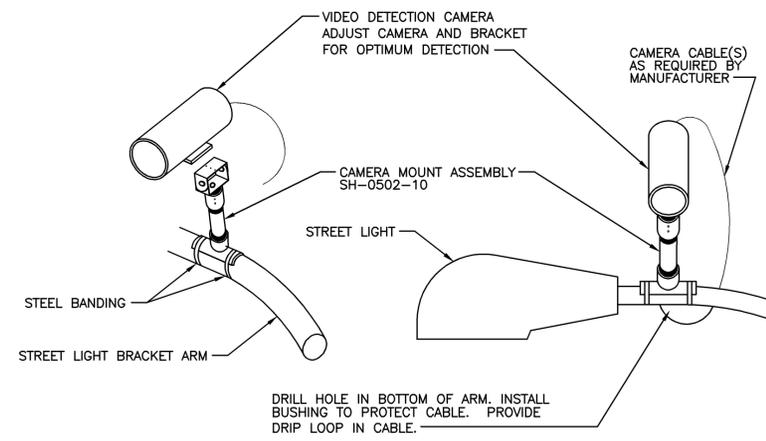

VIDEO CAMERA MOUNTING TO STREET LIGHT BRACKET ARM

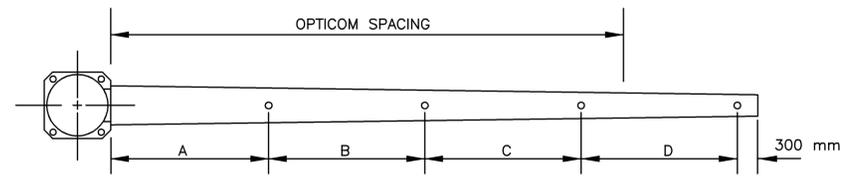


SIGNAL HEAD SPACING DETAIL

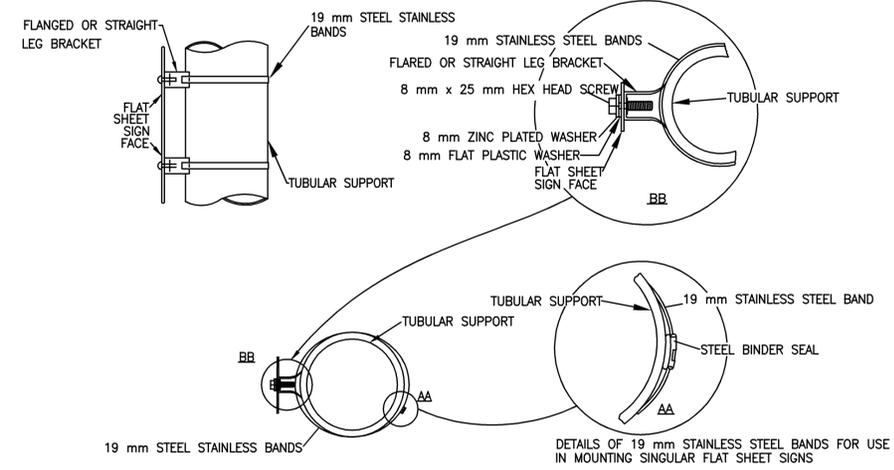

TUBULAR SUPPORT SIGN MOUNTING DETAIL

- NOTES:
- SIGNS ON TUBULAR SUPPORTS SHALL BE ATTACHED WITH TWO (2) BRACKETS AND STAINLESS STEEL BANDS.
 - HOLES IN SIGN FOR ATTACHMENT TO THE MOUNTING BRACKETS SHALL BE OFFSET A MINIMUM OF 50 mm FROM THE EDGE OF SIGN.
 - HOLES IN SIGN SHALL BE LOCATED SUCH THAT THE SIGN IS PLUMB AND LEVEL. SLIGHT ADJUSTMENTS IN HOLE LOCATION WILL BE REQUIRED TO ADJUST TO THE UPWARD RAKE IN THE MAST ARM.

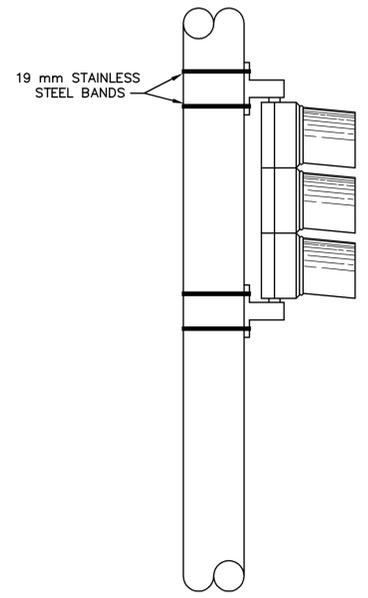

POLE BAND AND CLAMP MOUNTING DETAIL

CHART A - TRAFFIC SIGNAL POLE SUMMARY																		
POLE NO.	POLE DESIGNATION SEE SIGNAL POLE DETAILS (1)			LUMINAIRE ARMS		INCLUDED ANGLE	NO. OF SIGNALS ON MAST ARM		SIGNAL SPACING (SEE SIGNAL HEAD SPACING DETAIL)									
	MAST ARM LENGTH (1)	COMBO POLE TYPE	ARM 1	ARM 2	MAST ARM LENGTH (2)		MAST ARM (1)	MAST ARM (2)	MAST ARM (1)				MAST ARM (2)					
EDGE MOOR									A	B	C	D	OPTICOM	A	B	C	D	OPTICOM
1	14.8	-	-	-	-	-	3	-	7.7	3.4	3.4	-	9.4	-	-	-	-	-
3	15.3	-	-	-	7.45	90	3	2	8.2	3.4	3.4	-	9.9	5.3	3.7	-	-	7.15
5	12.8	-	-	-	-	-	3	-	5.7	3.4	3.4	-	7.4	-	-	-	-	-
6	12.8	-	-	-	7.45	90	3	2	5.7	3.4	3.4	-	7.4	5.3	3.7	-	-	7.15
WOODLAWN																		
1	13.3	-	-	-	-	-	3	-	6.2	3.4	3.4	-	7.9	-	-	-	-	-
2	11.8	-	-	-	8.8	90	3	2	4.7	3.4	3.4	-	6.4	4.8	3.7	-	-	6.65
4	15.3	-	-	-	-	-	3	-	8.2	3.4	3.4	-	9.9	-	-	-	-	-
6	14.7	-	-	-	11.3	90	3	2	7.2	3.4	3.4	-	8.9	7.3	3.7	-	-	9.15

- NOTES:
- MANUFACTURER SHALL CERTIFY THAT ALL POLES CONFORM TO THE LATEST EDITION OF THE AASHTO STANDARD SPECIFICATIONS FOR STRUCTURAL SUPPORTS FOR HIGHWAY SIGNS, LUMINAIRES AND TRAFFIC SIGNALS.
 - ENGINEER TO CONFIRM SIGNAL HEAD SPACINGS PRIOR TO ARM DRILLING AND HEAD INSTALLATION.