


NOTE:
BLOCKS FROM RETAINING WALL ON
LOT 1, BLK 1, HULL ADD. TO BE
REMOVED AND RETURNED TO OWNER.

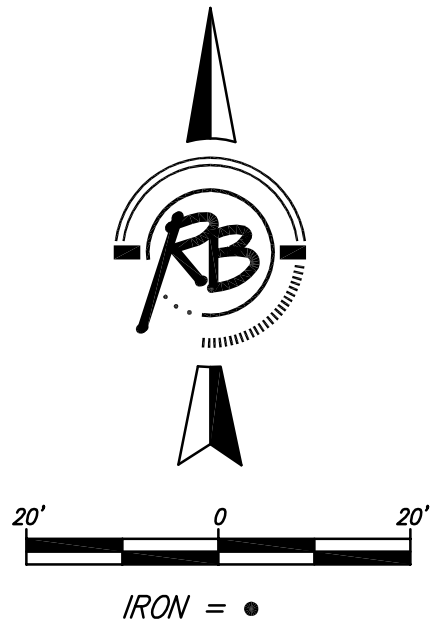

CONSTRUCT VALLEY GUTTER PAVEMENT.
7" REINFORCED CONCRETE W/ 5"
CRUSHED ROCK BASE AND MONOLITHIC
EDGE CURB (6 5/8")

CONSTRUCT 21.5 L.F. COMBINED
CURB AND GUTTER.

REMOVE AND REPLACE WALK
AND RAMP AS INDICATED.

ADJUST WATER VALVE TOPS
FROM 1330.25 TO 1330.75

REMOVE EXISTING SIGN AND
RESET AT STA. 5+54, 20' LT.


CONSTRUCT 6" CONCRETE
DRIVE PAVEMENT

CONTRACTOR TO REMOVE AND DISPOSE
OF DRIVE ENTRANCE CULVERTS AND
FILL DITCHES TO R/W LINE TO PROVIDE
POSITIVE DRAINAGE TO CURB.

ADJUST WATER METER TOP
FROM 1330.97 TO 1331.50

CONSTRUCT COMBINED FULL
HEIGHT CURB AND GUTTER
(6 5/8" & 1 1/2") BOTH SIDES

EXISTING GRAVEL ROAD
TO BE REMOVED.

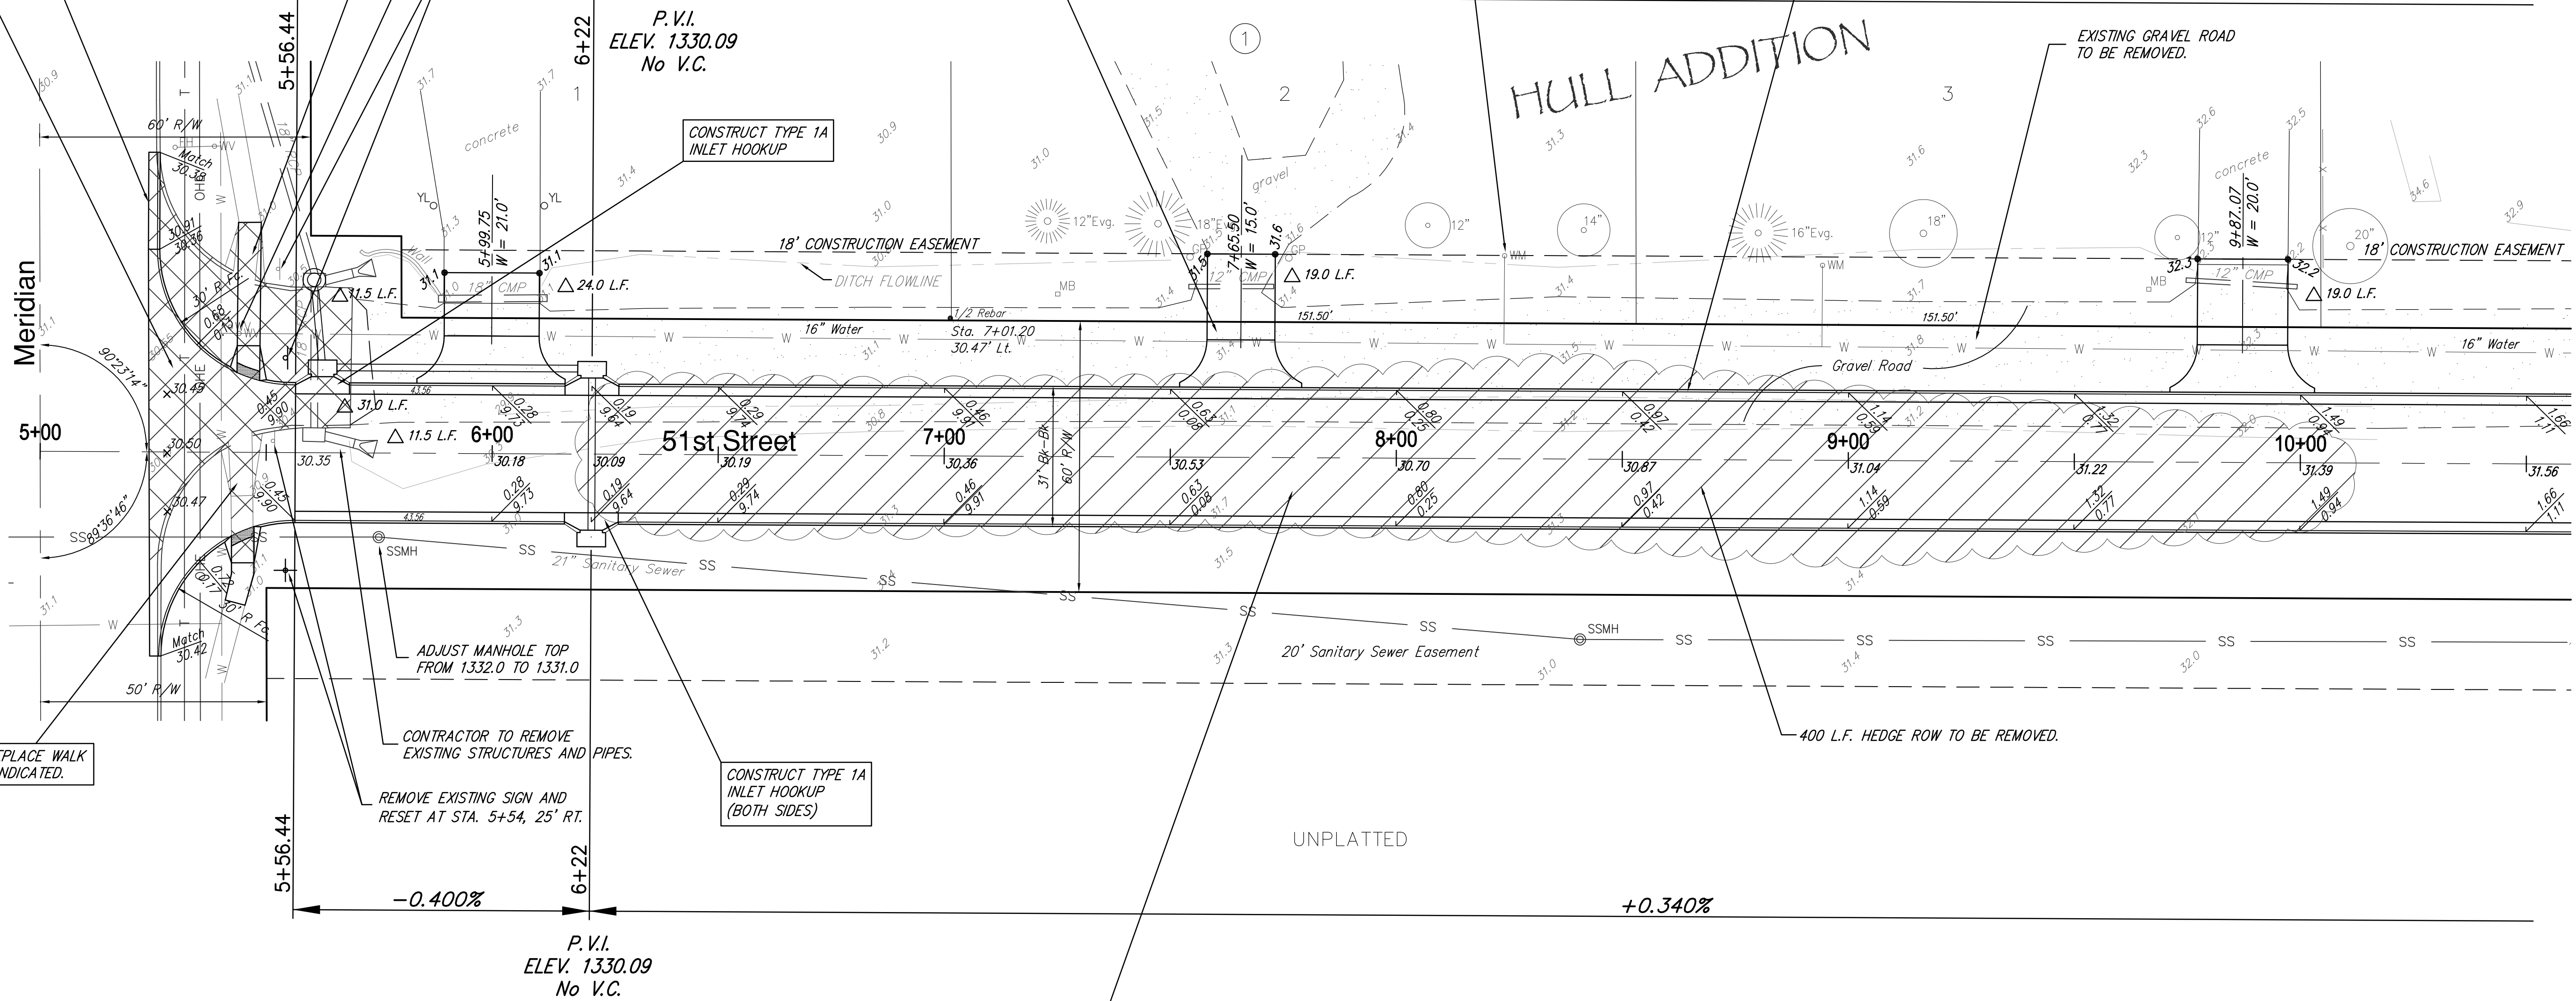





REMOVE AND REPLACE WALK
AND RAMP AS INDICATED.

CONTRACTOR TO REMOVE
EXISTING STRUCTURES AND
PIPES.

REMOVE EXISTING SIGN AND
RESET AT STA. 5+54, 25' RT.


CONSTRUCT TYPE 1A
INLET HOOKUP
(BOTH SIDES)

400 L.F. HEDGE ROW TO BE REMOVED.

-  A.C. MAT PAVEMENT TO BE REMOVED
-  TREE ROW TO BE REMOVED
-  TREE TO BE REMOVED
-  PIPE TO BE REMOVED

NOTE :
Construction Traffic Control shall comply with the
current version of the MUTCD. No more than one lane
of traffic may be closed on Meridian at any time
during construction.

PAVING IMPROVEMENTS
51st Street North
WICHITA, KANSAS

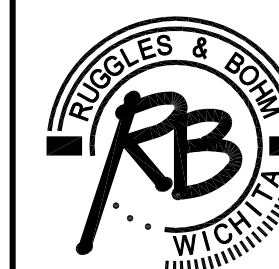

Ruggles & Bohm, P.A.
Engineering, Surveying, Land Planning
924 North Main (316) 264-8008
Wichita, Kansas 67203 (316) 264-4621 fax
www.rbkansas.com E-mail: info@rbkansas.com

DRAWING FILE Paving {51st - 1}
PROJECT NUMBER 472-84550
472-84551

DESIGN	KWL	SHEET 4 OF 31
DRAWN	RA	
REVIEW		
UTILITY		
DATE	Sept. 18, 2007	