




Combined Curb & Gutter (6")

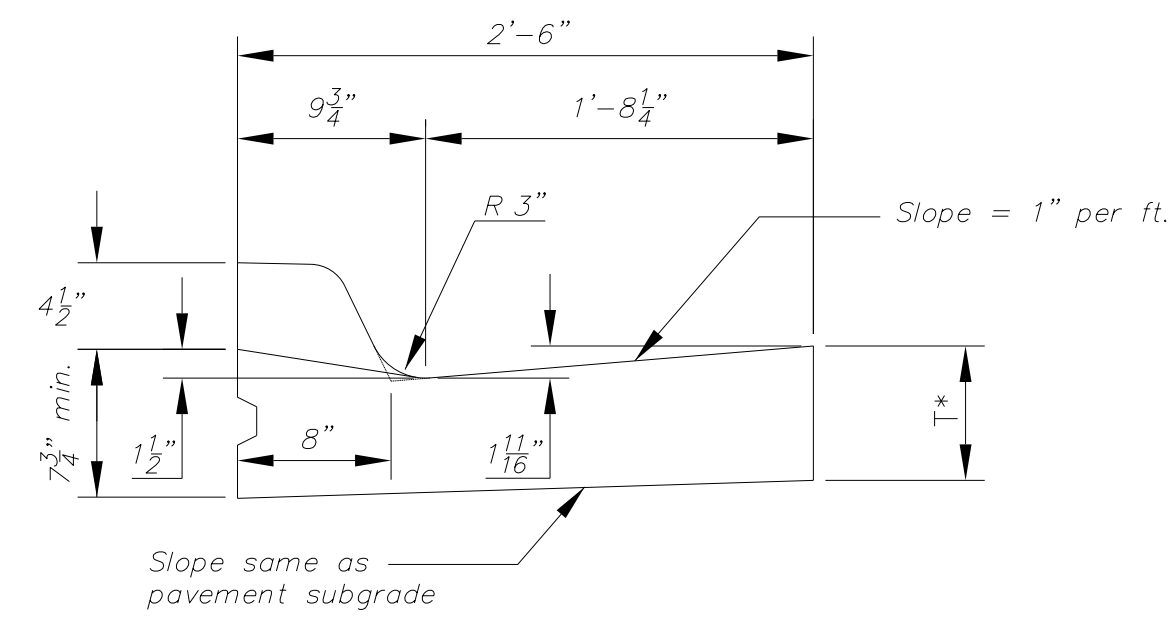


Combined Curb & Gutter (1 1/2")

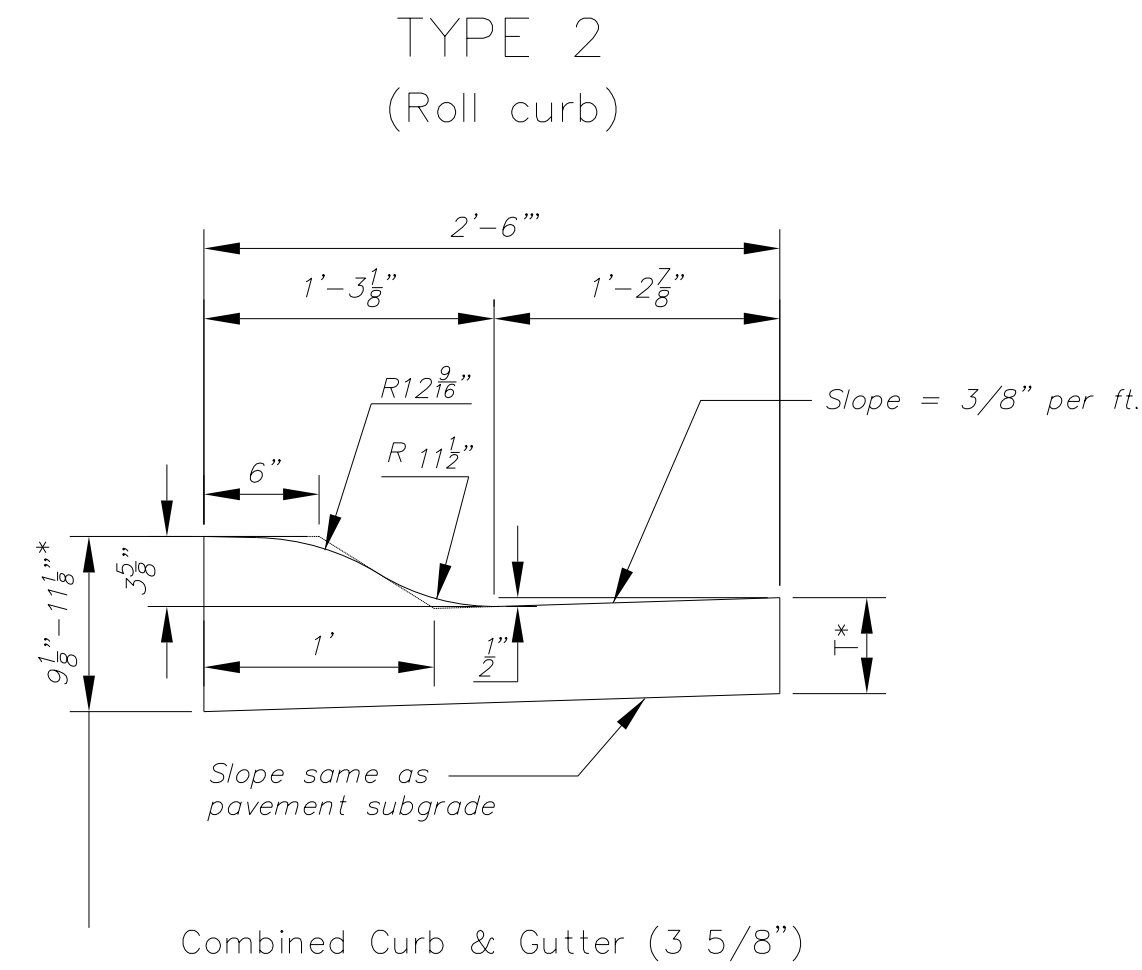


Combined Curb & Gutter (3 5/8")

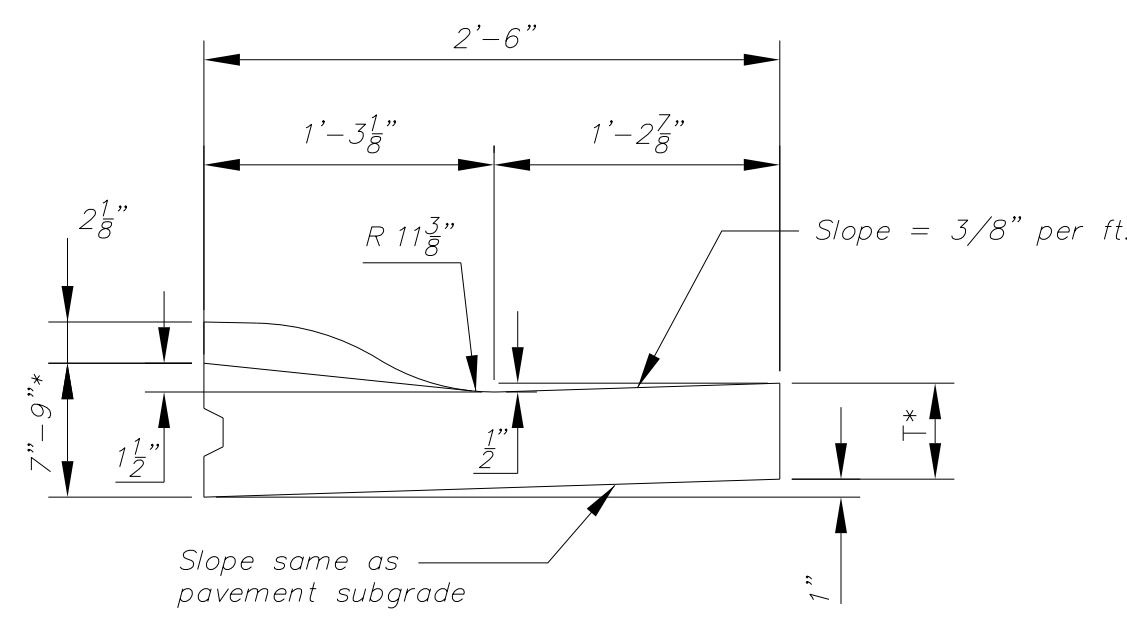


Combined Curb & Gutter (1 1/2")

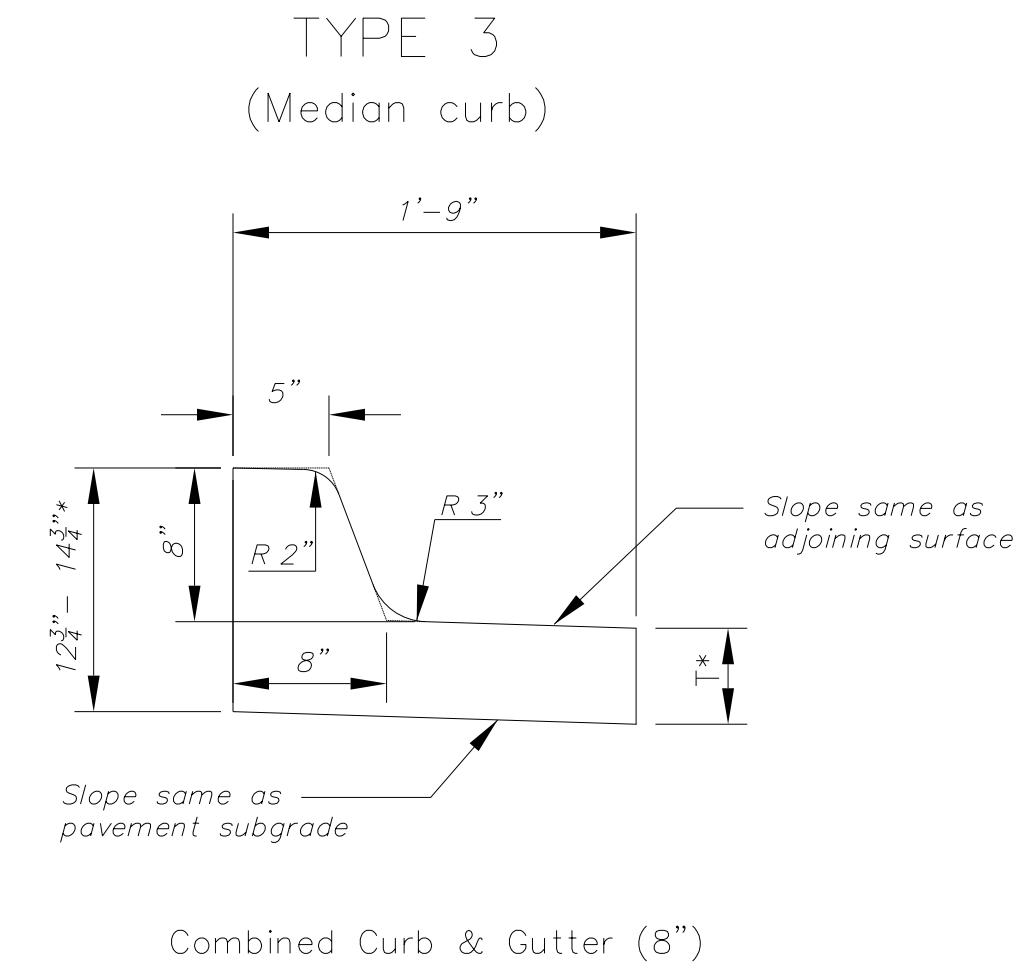


Combined Curb & Gutter (8")

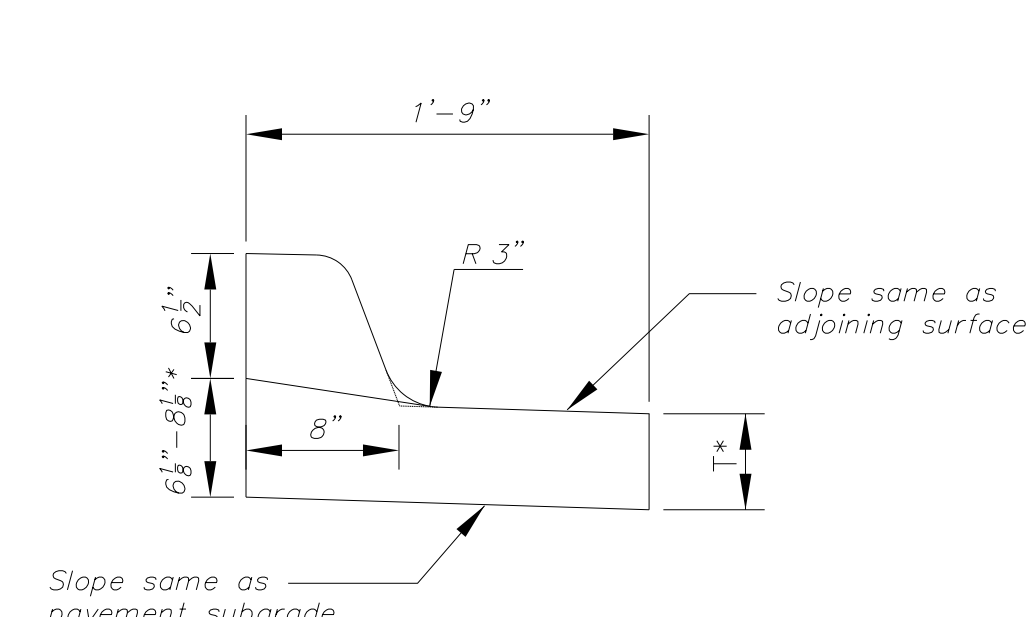

Combined Curb & Gutter (1 1/2")

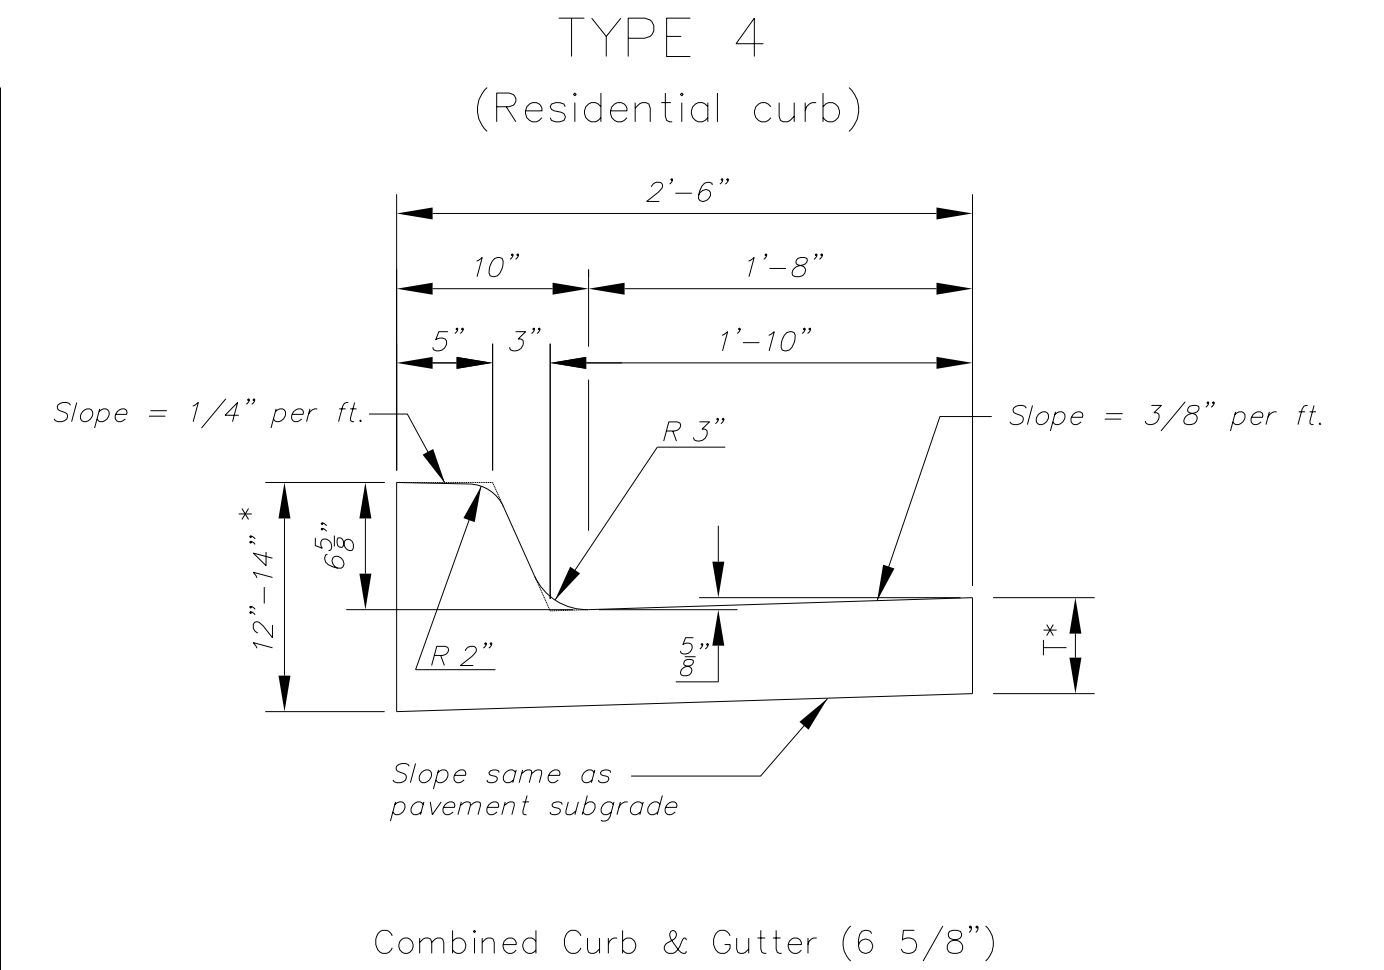

Combined Curb & Gutter (6 5/8")

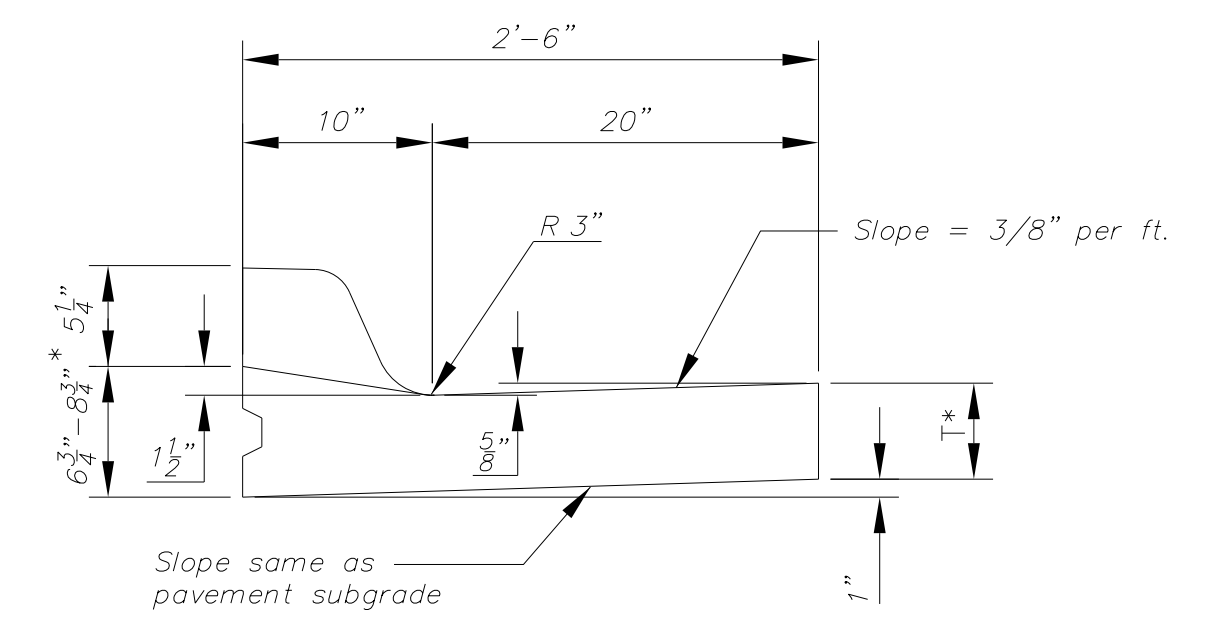


Combined Curb & Gutter (1 1/2")


T\* = Thickness of curb to adjust with pavement thickness

GENERAL NOTES


- Expansion (isolation) joints shall be constructed a maximum of 300' apart and at all PIs, PCs, cul-de-sac quadrants, and ends of returns.
- Contraction joints shall be constructed a minimum of 12' apart.
- Joint sealer shall be required at all joints on arterial and industrial streets and at intersections on residential streets.

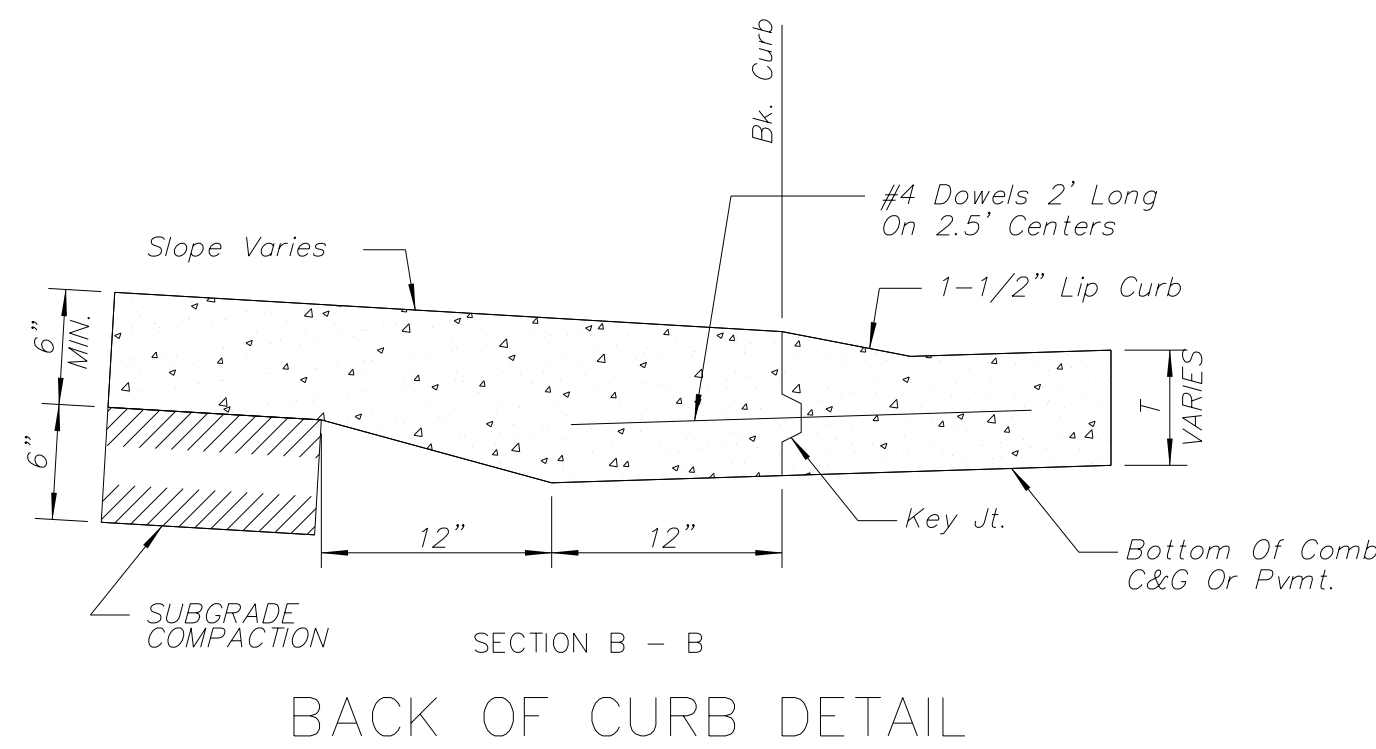

SECTION B - B  
BACK OF CURB DETAIL

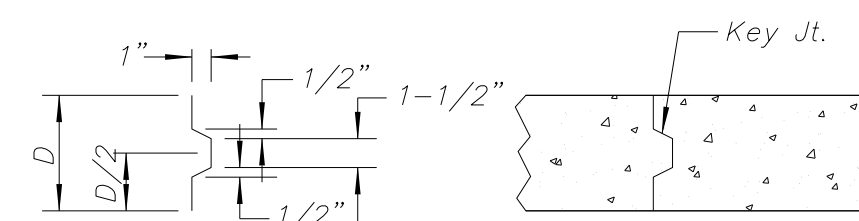

ALT. LONGITUDINAL CONSTRUCTION JOINT

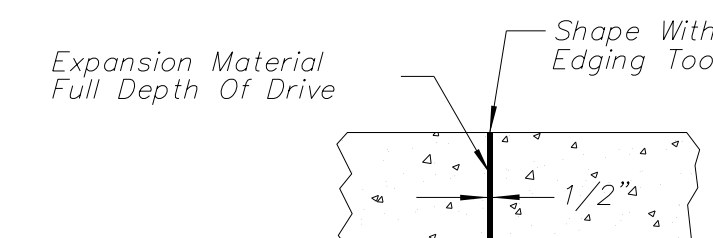

EXPANSION JOINT (E.J.)

Plotted on: Tuesday, September 27, 2011 09:40 AM  
 mbechtel  
 Plot Queue: \\ovp000\Public\Library\10101pen\CC-22x35.pen  
 Plot Scale: 10.000000:0.000000 Pen Table: \\ovp000\Jobs\4809\Wichita\Detail\Wichita\curb-gutter-def.dgn  
 Design Filename: \\ovp000\Jobs\4809\Wichita\Detail\Wichita\curb-gutter-def.dgn



<b>CURB &amp; GUTTER DETAILS</b>			
CITY ENGINEER <b>JAMES L. ARMOUR, P.E., L.S.</b>			
PROJECT NUMBER 472-84817 PHASE I	OCA NUMBER 770005	DATE 11/2011	
CITY ENGINEER'S OFFICE CITY HALL - SEVENTH FLOOR 455 NORTH MAIN STREET WICHITA, KANSAS 67202-1620 (316) 268-4501		DESIGN	DRAWN
		SHEET <b>34 of 113</b>	