Survey Kraus Bk/Pg. #39
Plat J.L.R.
Ckc "
Checked

B.M. 118.10 "C" in Construction, top curb at S. end of Radius, S.E. 17th & Mathewson.

Scale: 1" = 20'

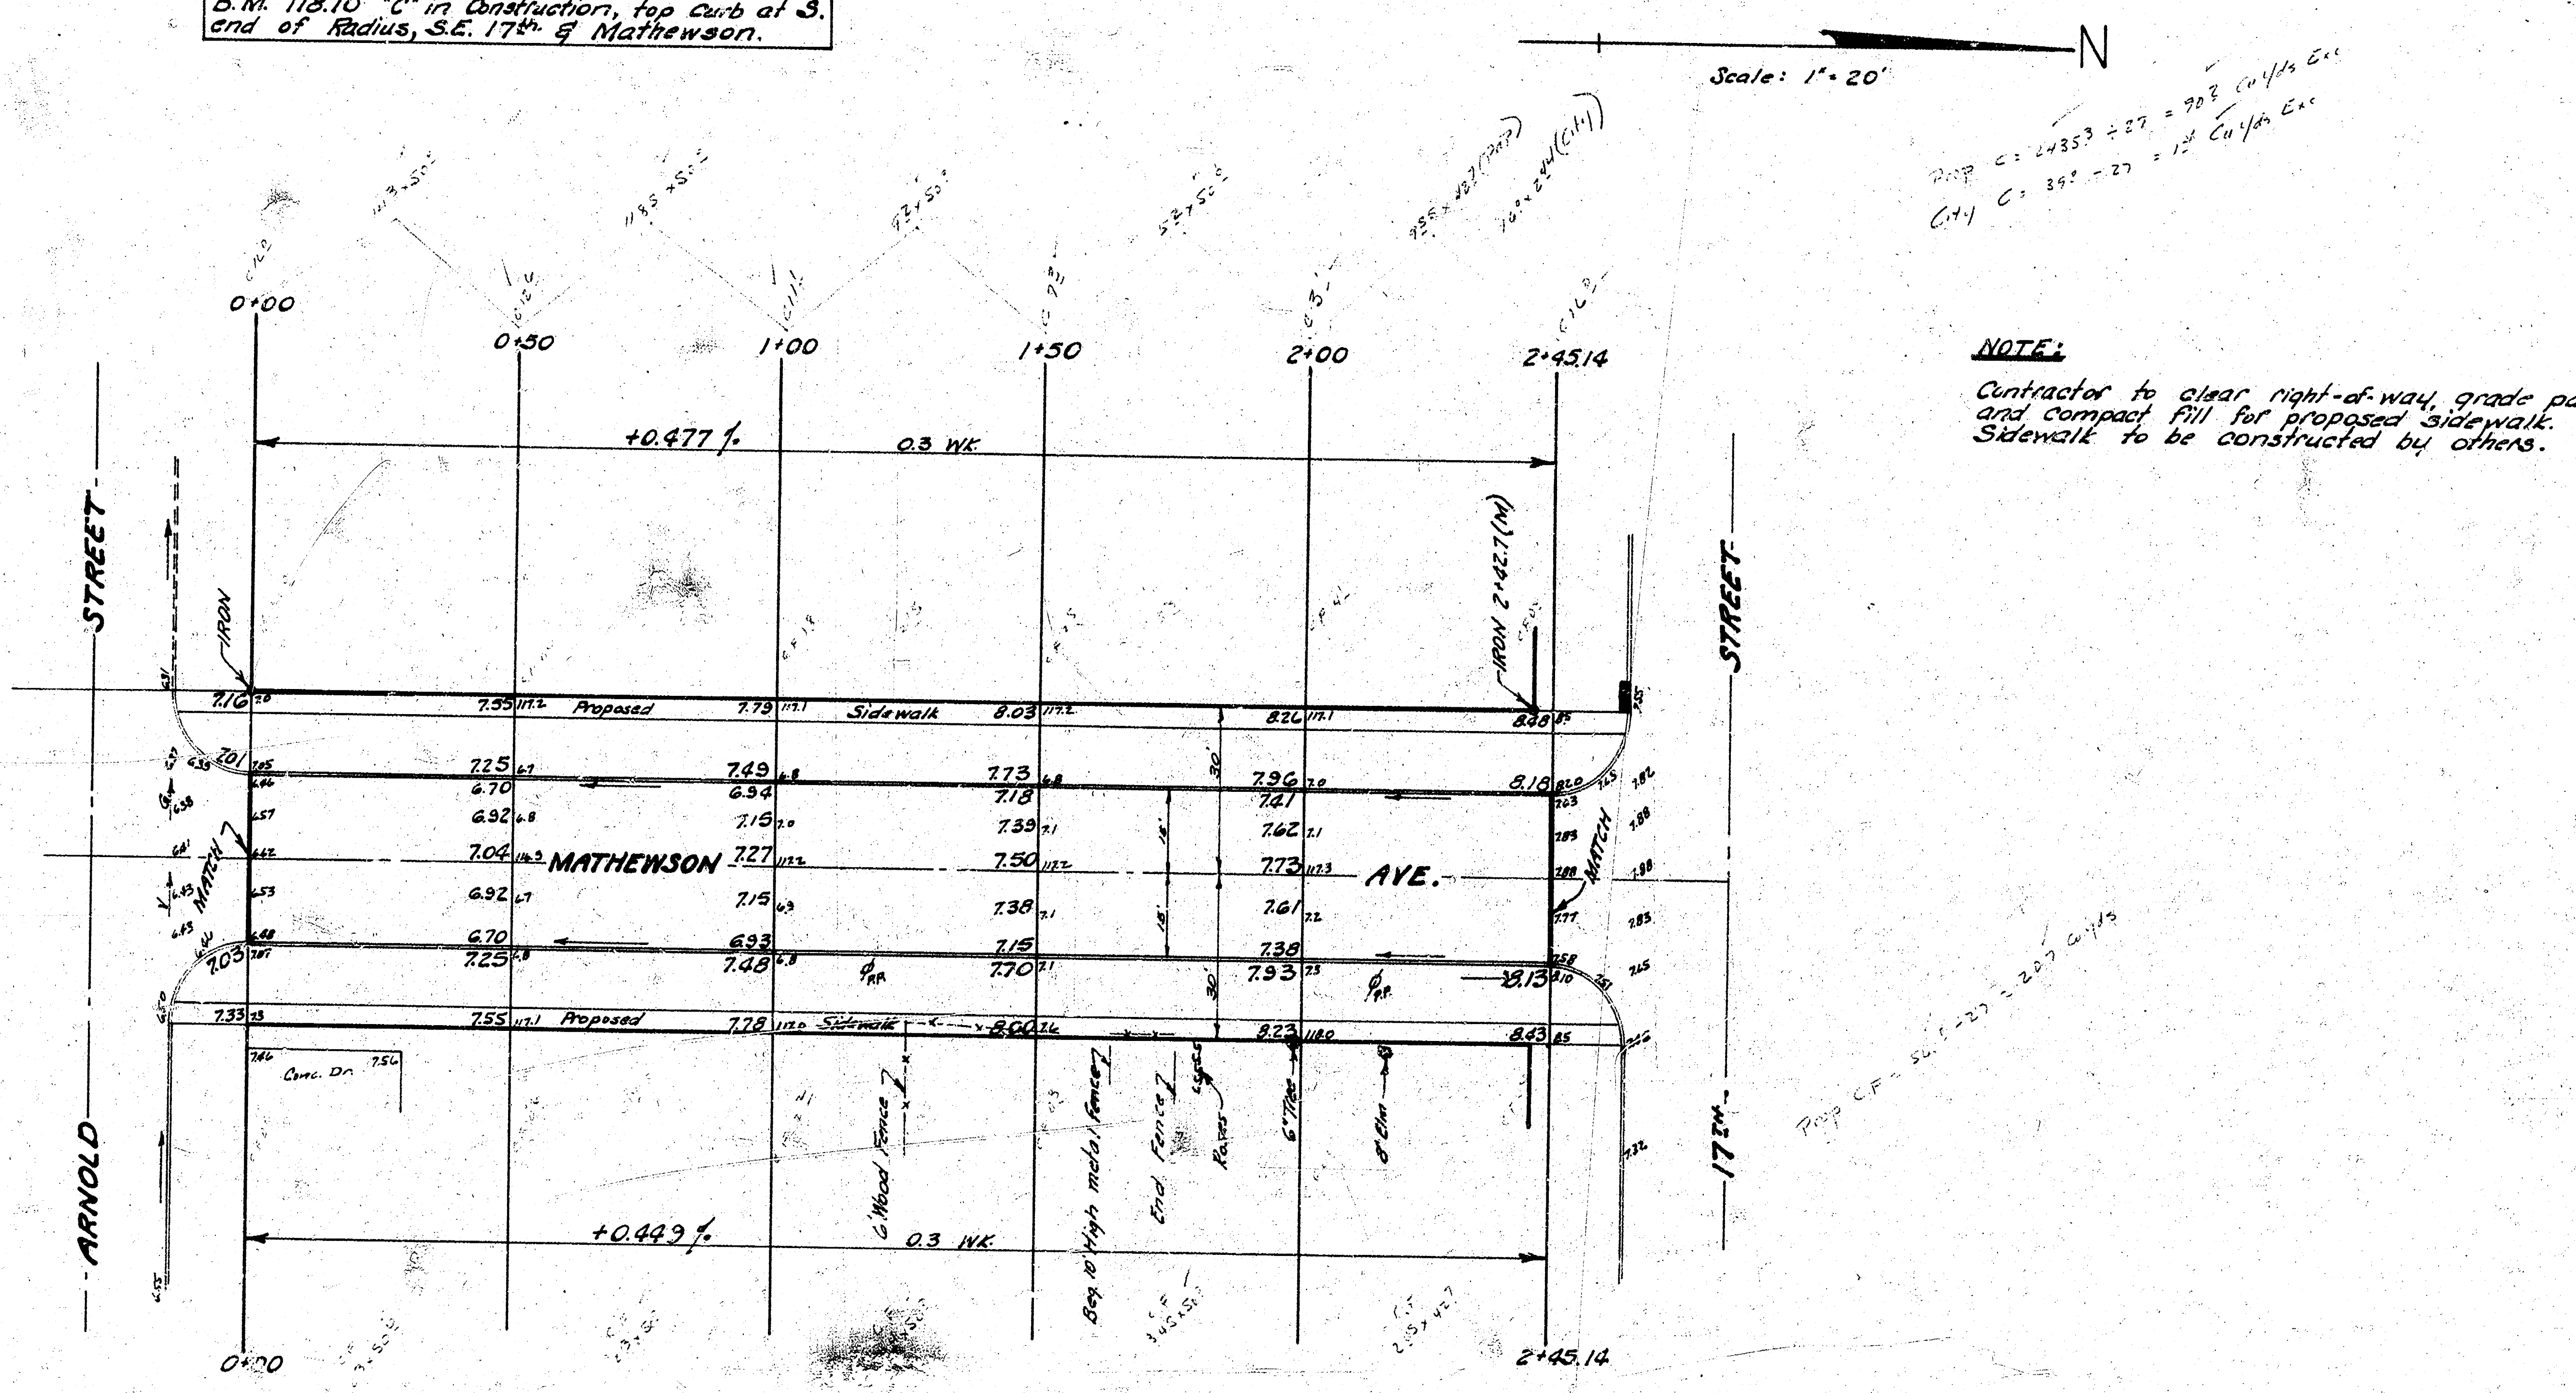
N
0+00
0+50
1+00
1+50
2+00
2+45.14
+0.477 %
0.3 WK
+0.449 %
0.3 WK
ARNOLD STREET
17th STREET
MATHEWSON AVE.
Proposed Sidewalk
Proposed Sidewalk
IRON
IRON 2+42.7 (W)
MATCH
MATCH
Conc. Dr.
Wood Fence
Beg. 10' High metal Fence
End Fence
Poles
6" Elm
6" Elm
7.16
7.55
7.79
8.03
8.26
8.48
7.25
7.49
7.73
7.96
8.16
6.70
6.94
7.18
7.41
6.92
7.15
7.39
7.62
7.04
7.27
7.50
7.73
6.92
7.15
7.38
7.61
6.70
6.93
7.15
7.38
7.25
7.48
7.70
7.93
8.13
7.33
7.55
7.78
8.00
8.22
8.43
7.01
7.03

NOTE:

Contractor to clear right-of-way, grade parkings and compact fill for proposed sidewalk. Sidewalk to be constructed by others.

EXCAVATION

	PROPERTY	CITY
	90 Cu.Yds.	2 Cu.Yds.
+10 %	9 " "	
Totals	99 Cu.Yds.	2 Cu.Yds.

COMP. FILL

PROPERTY
21 Cu.Yds.
2 " "
23 Cu.Yds.
145 " " S.G.M.
168 Cu.Yds.

R. W. LINN 3534
JAMES H. TANDY 2012
JOHN L. ALLEN 821
B. E. SMITH 436

MATHEWSON AVENUE
FROM N.L. ARNOLD STREET
to S.L. 17TH. STREET
30' Conc. & Int. Curb
B.E. SMITH CITY ENGINEER
CITY OF WICHITA KANSAS
Date: May 1969
Project No. C 18-122