

Maintain one existing construction entrance onto existing paved roadway per detail, sheet 11.



All easements have been graded prior to construction with the mass grading plan, however, all easements shall be fine graded with this project after street construction has been completed. Immediately following sanitary sewer construction in easements as shown, easements were graded to within 6" of proposed grade. All cost associated with the fine grading shall be included in the lump sum bid item "Easement Grading".

NOTE: Contractor shall remove & replace existing erosion control measures as necessary for construction. Contractor shall be required to maintain all on-site erosion control items until final acceptance by the City of Wichita.

EROSION CONTROL MEASURE	UNITS	QUANTITY
Install Drop Inlet Barrier	Ea.	2
Install Curb Inlet Barrier	Ea.	2
Install Straw Bale Barrier	Ea.	1
Maintain Curb Inlet Barrier	Ea.	2
Maintain Construction Entrance	Ea.	1
Install Curlex Erosion Control Mat	S.Y.	1292

Area to be graded  $\frac{45.0}{60}$  Proposed Grades

The contractor shall fill and grade the easements as shown to the elevations given on the easement grading plan. All costs for grading shall be incidental to the Easement Grading Bid Item. The contractor shall 'straight' grade the easements between the elevations given. Where a callout designates 'Match', the contractor will grade to the existing ground elevation. The existing ditch cross sections are shown below.

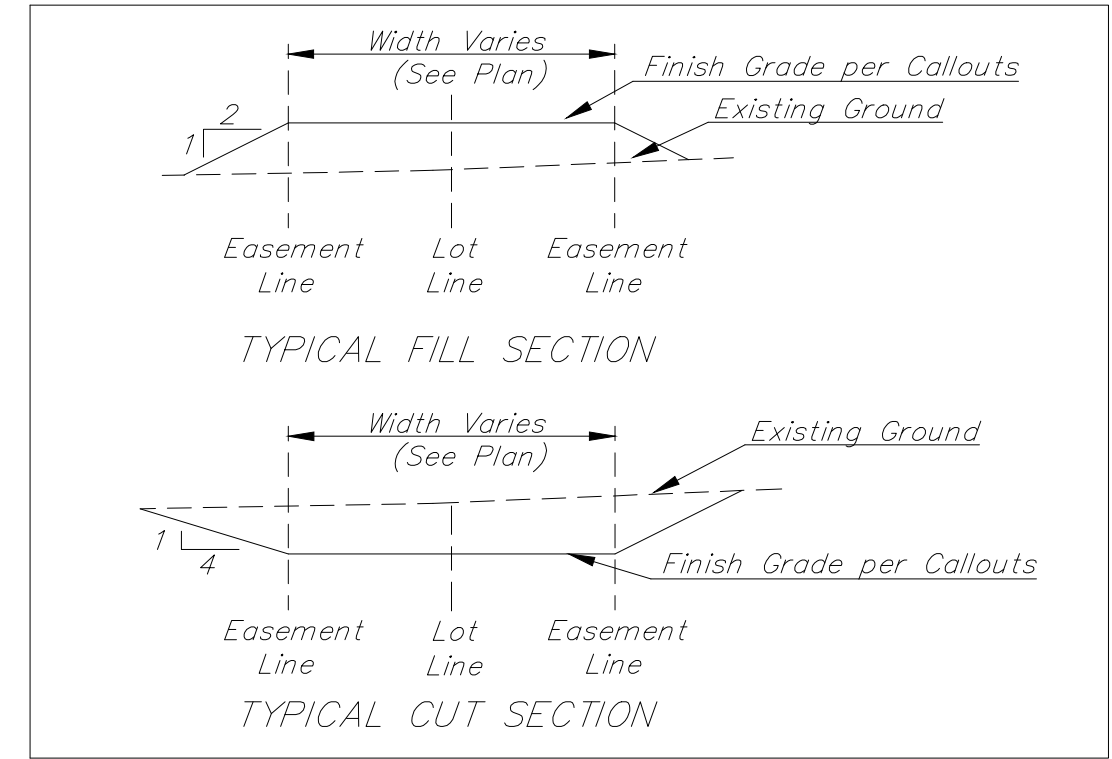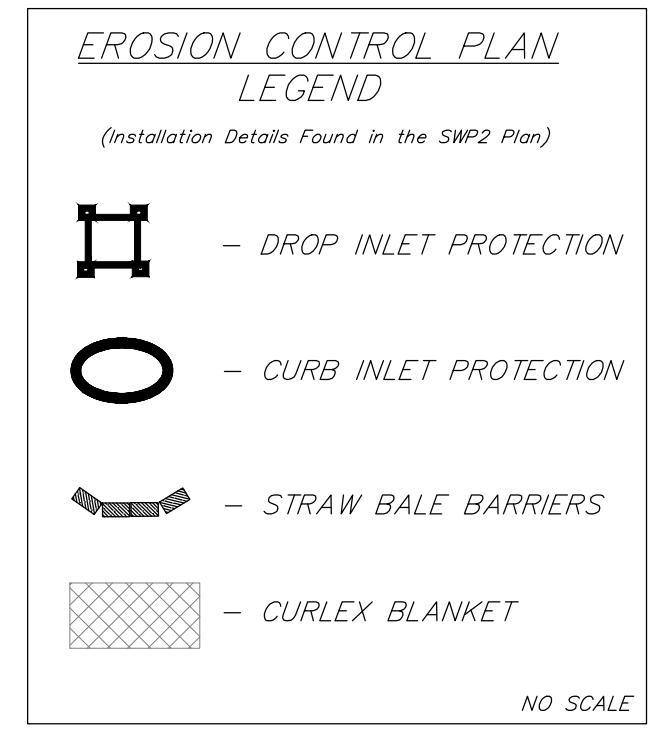

Scale: 1" = 60'

**Baughman** SOUTHERN RIDGE 4TH ADDITION - PH. II  
EROSION CONTROL PLAN  
WICHITA, KANSAS

Baughman Company, P.A. 315 Ellis St. Wichita, KS 67211 F 316-263-7271 F 316-263-0149  
ENGINEERING | SURVEYING | PLANNING | LANDSCAPE ARCHITECTURE

PROJECT NUMBER 412-84343	DESIGN	DRAWN TMS
REVISIONS:	APPROVED	DATE 01/13
	SCALE Noted	SHEET 8 OF 16

SouthernRidge4th\Phase2\StrEPlan