


BM 107.06 80' spike NE side HLP SW cor St. Francis & Morris.

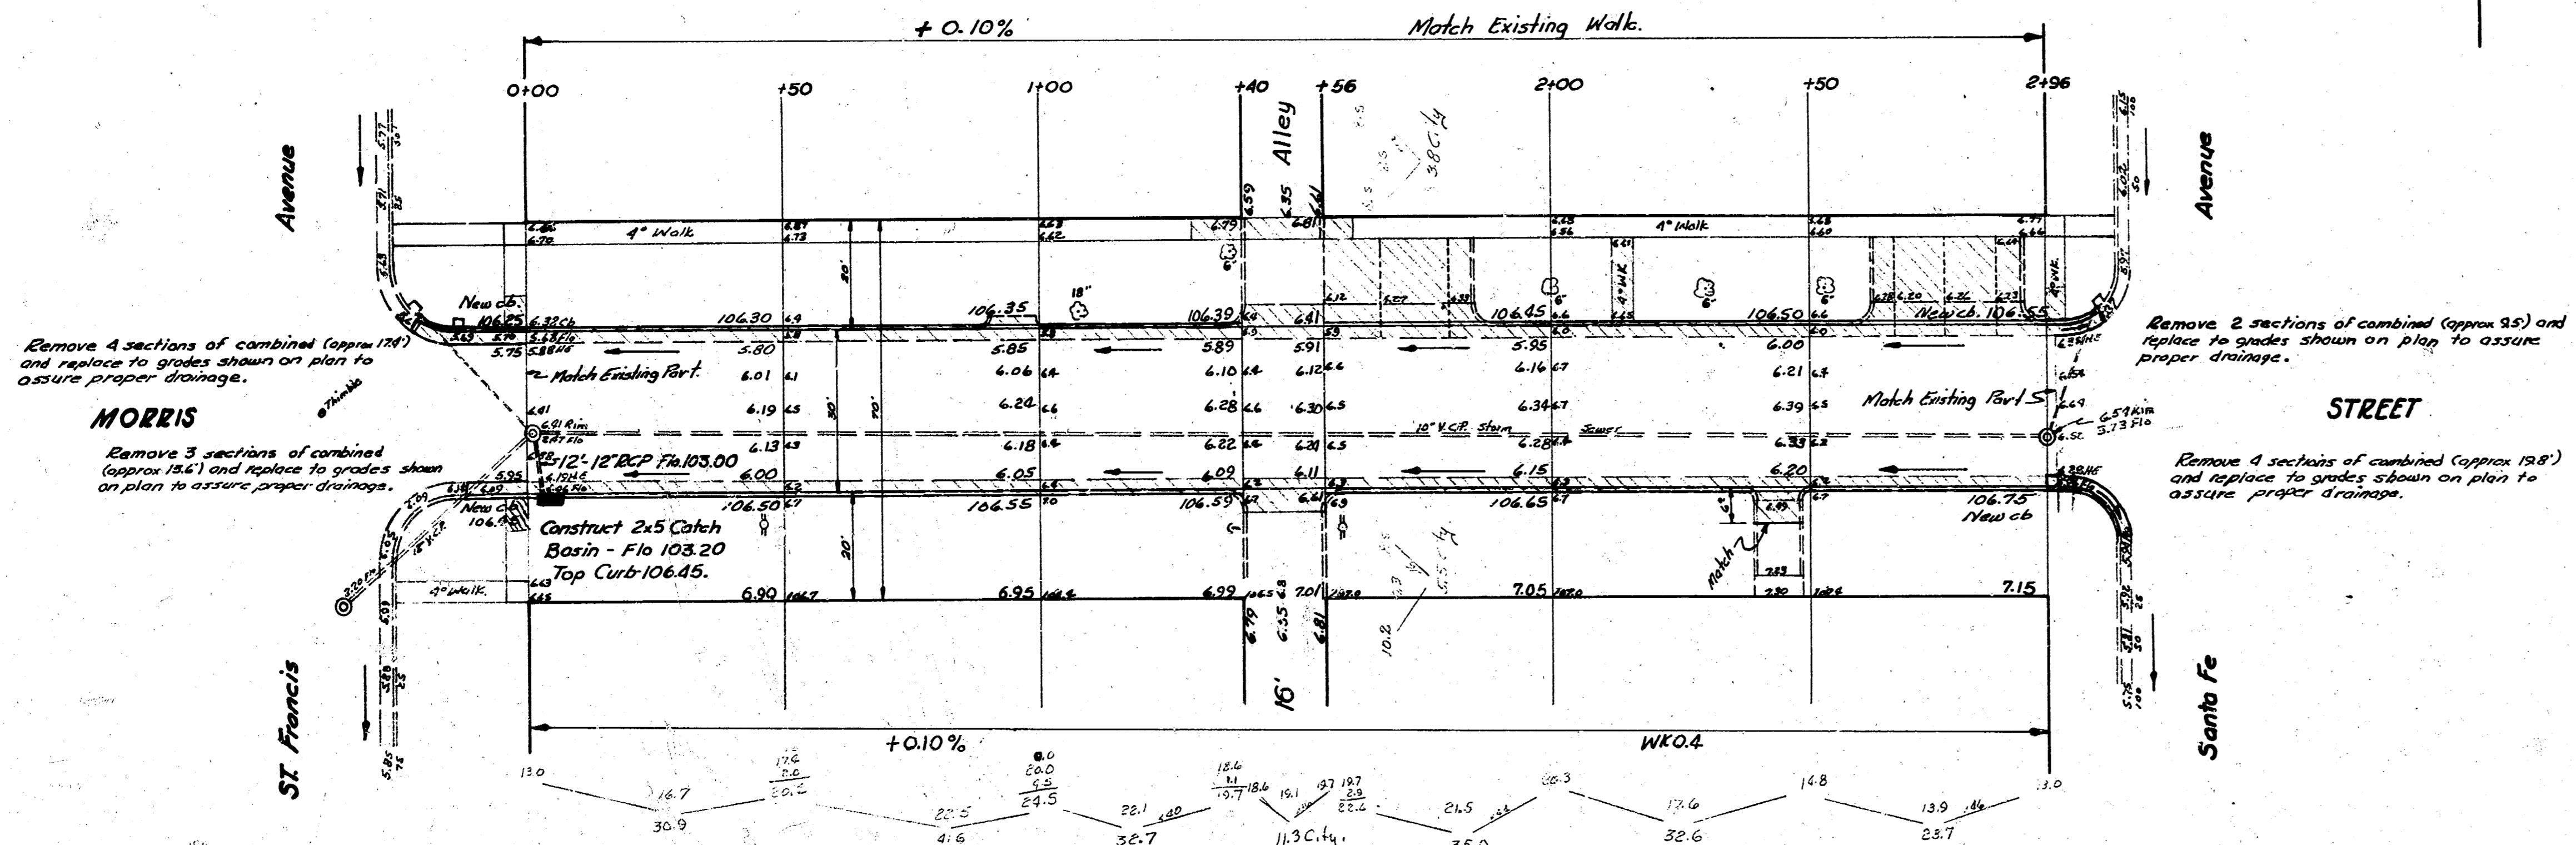

Remove 4 sections of combined (approx 178') and replace to grades shown on plan to assure proper drainage.

MORRIS

Remove 3 sections of combined (approx 184') and replace to grades shown on plan to assure proper drainage.

Construct 2x5 Catch Basin - Flo 103.20 Top Curb 106.45.

Remove 2 sections of combined (approx 95') and replace to grades shown on plan to assure proper drainage.

STREET

Remove 4 sections of combined (approx 198') and replace to grades shown on plan to assure proper drainage.

Excavation Totals -
 Paper 4 C. 4
 156.5 20.6
 19.7 20.6
 216.2 Cu yds.

City Engineer
 R. E. Smith
 City of Wichita, Kansas
 1957

MORRIS STREET
 EL ST Francis to WL Santa Fe
 30' Conc & Cb.
 CITY OF WICHITA, KANSAS
 R. E. SMITH CITY ENGINEER
 OCT. 1957 PROJ. NO. C 17-62

