



**TYPE 1**  
(Arterial curb)

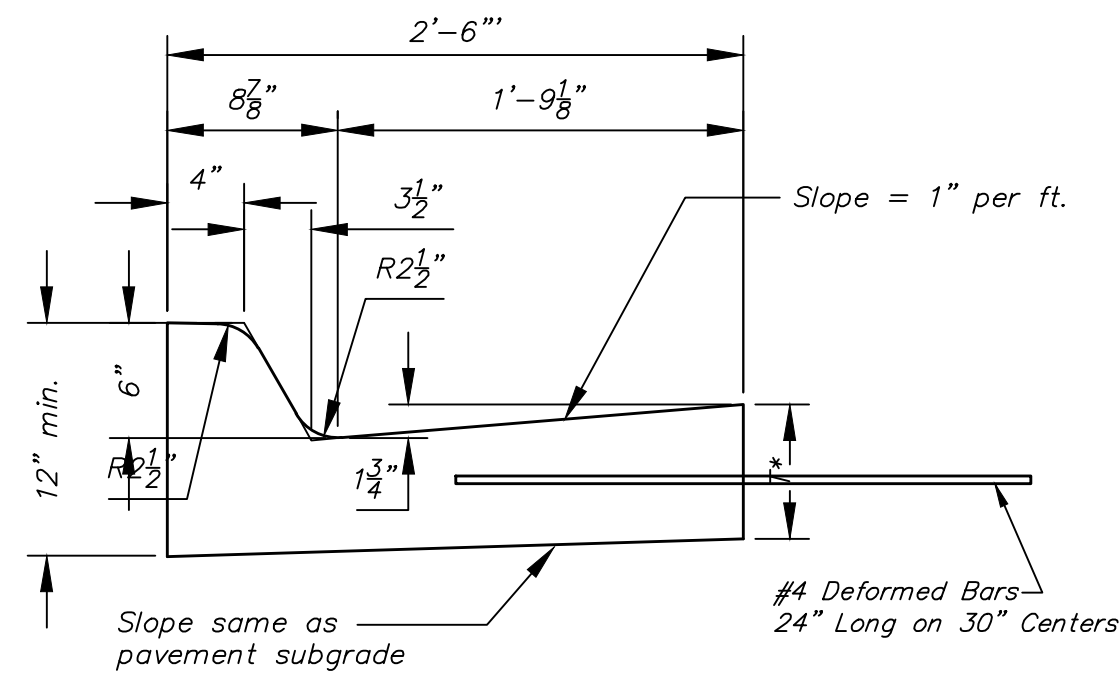


Combined Curb & Gutter (6")

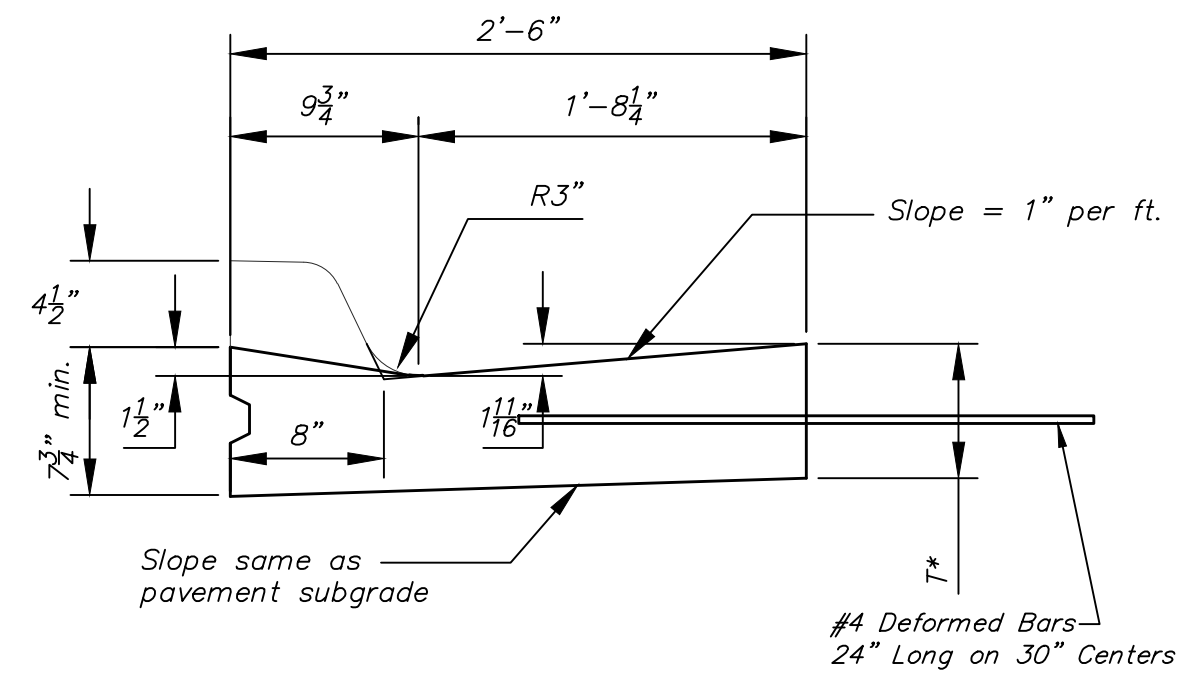


Combined Curb & Gutter (1 1/2")

**TYPE 2**  
(Roll curb)

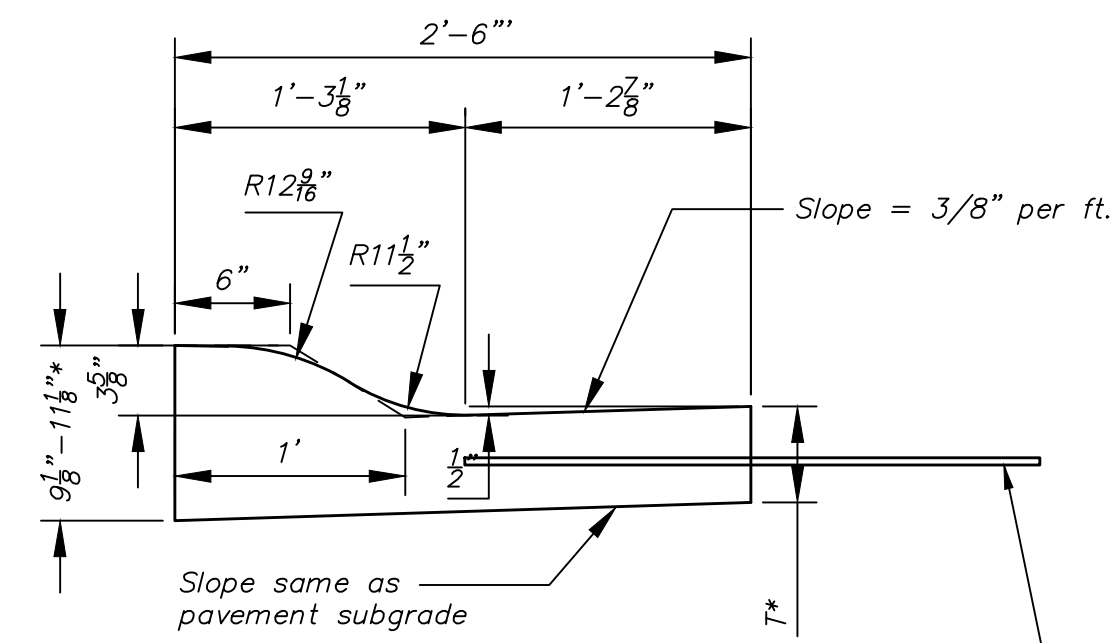


Combined Curb & Gutter (3 5/8")

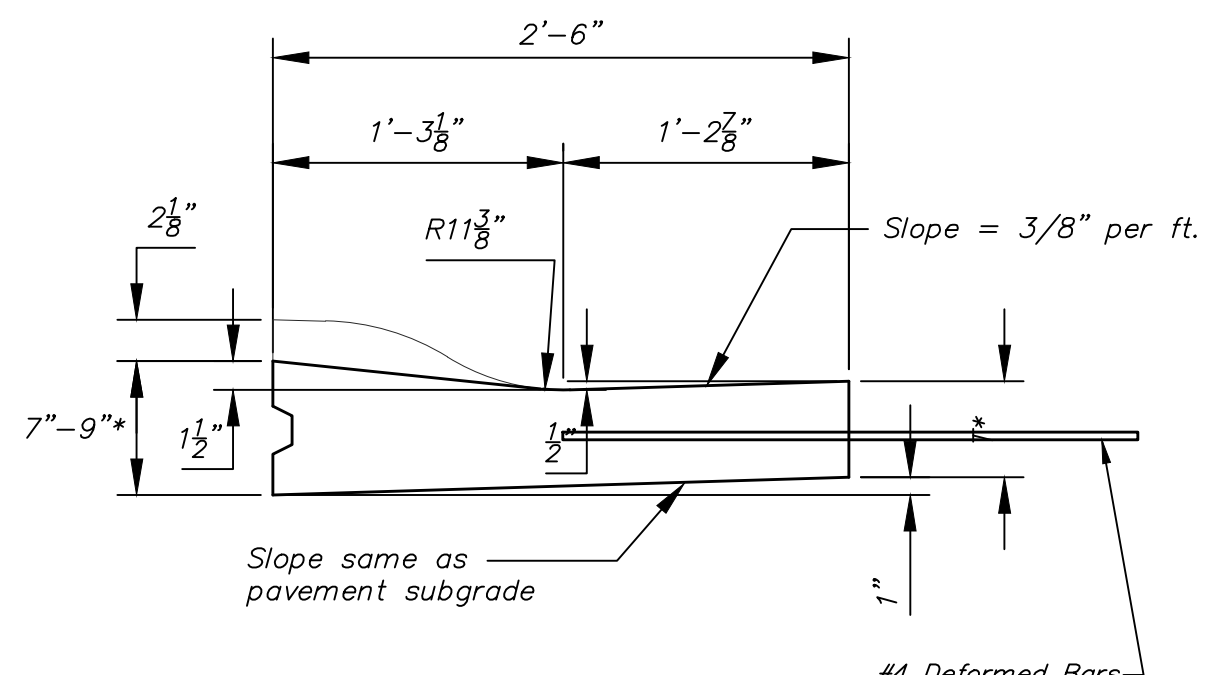


Combined Curb & Gutter (1 1/2")

**TYPE 3**  
(Median curb)

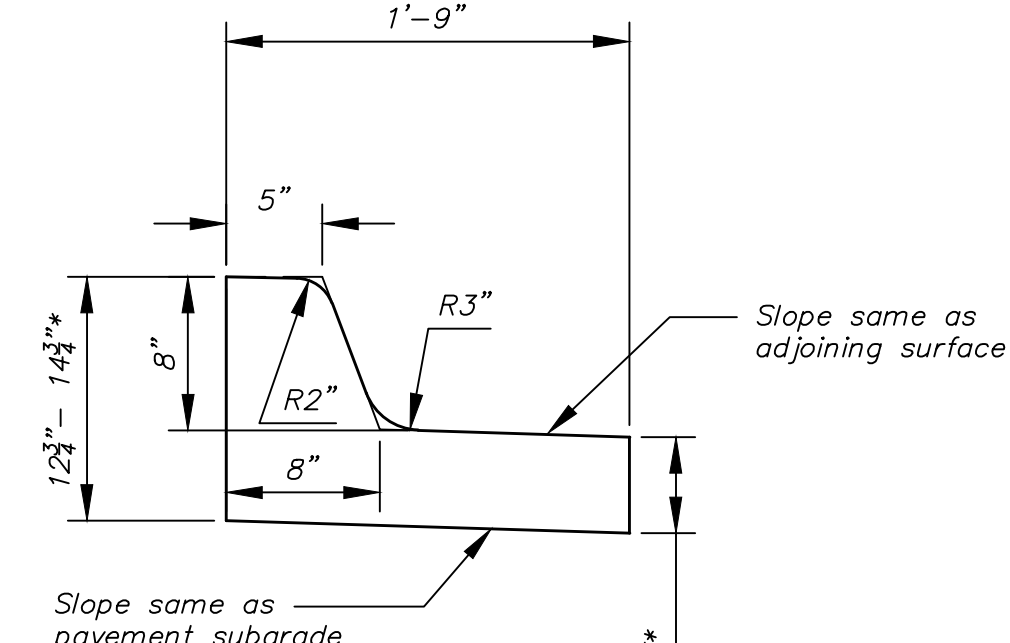


Combined Curb & Gutter (8")

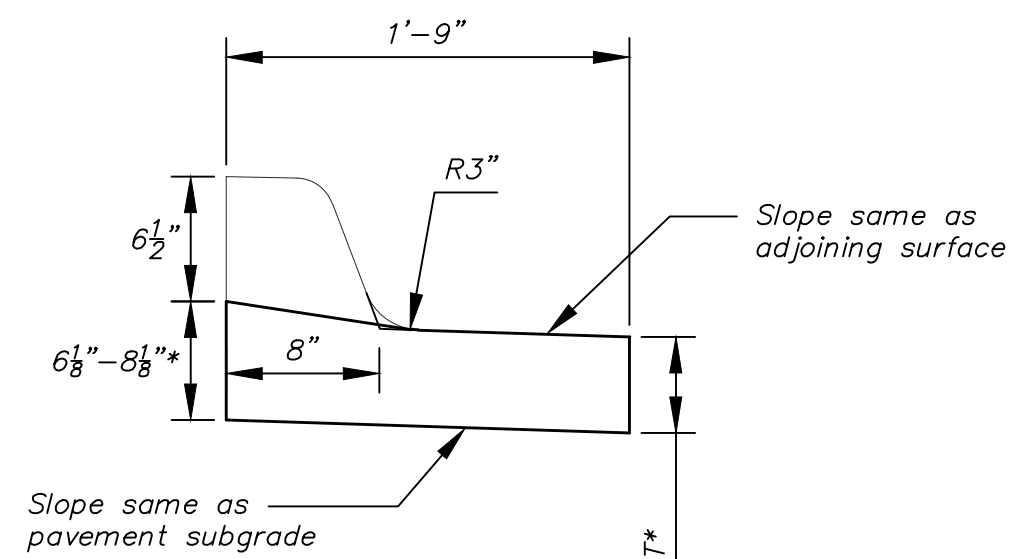


Combined Curb & Gutter (1 1/2")

**TYPE 4**  
(Residential curb)

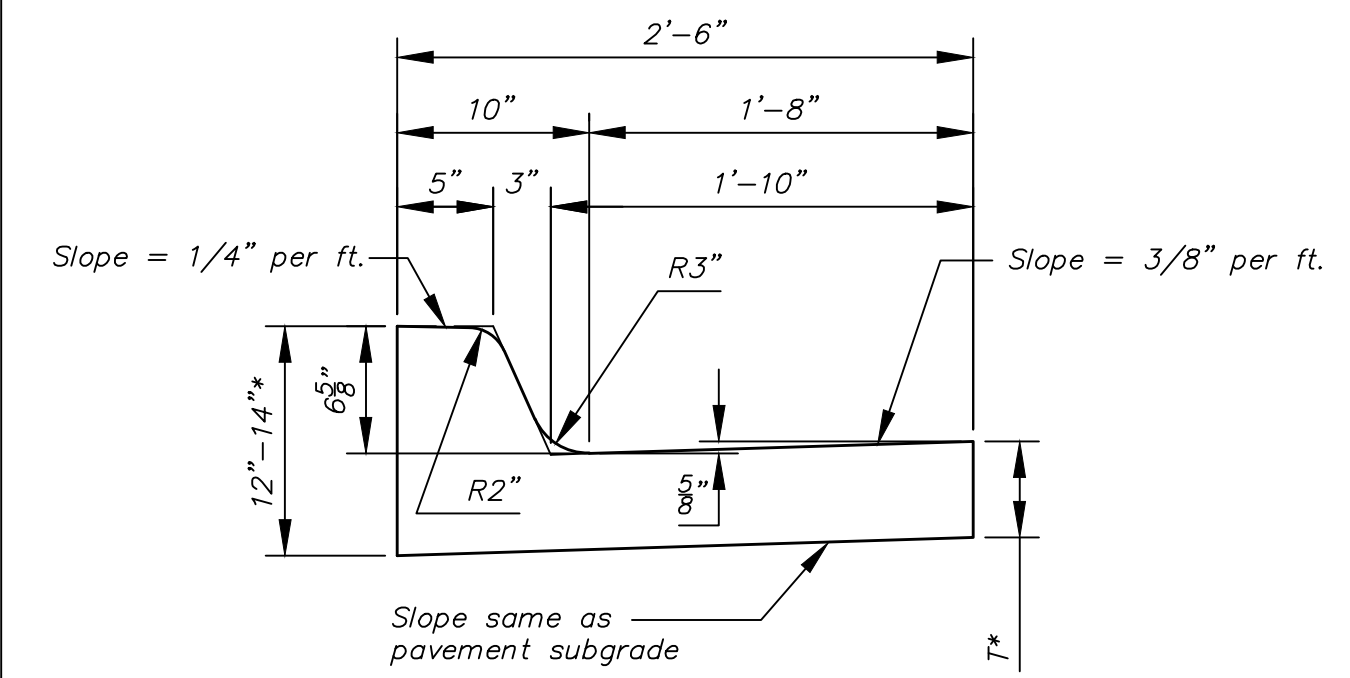

Combined Curb & Gutter (6 5/8")

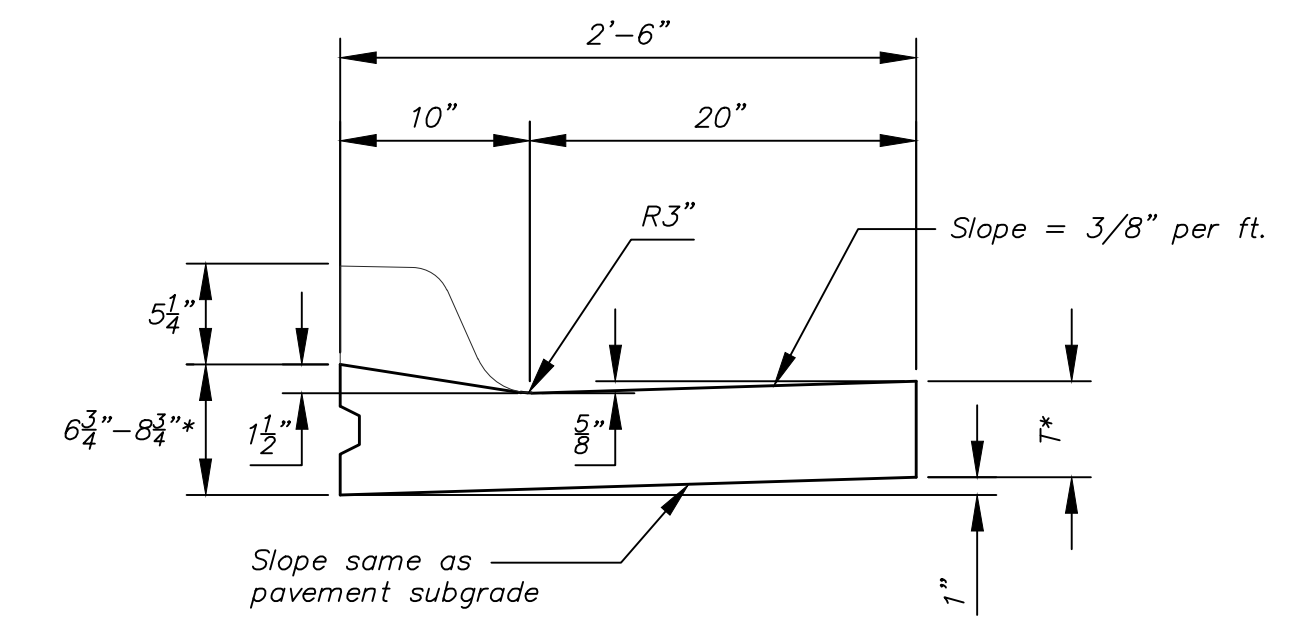


Combined Curb & Gutter (1 1/2")

T\* = Thickness of curb to adjust with pavement thickness


**GENERAL NOTES**

1. Expansion (isolation) joints shall be constructed a maximum of 300' apart and at all Pls, PCs, cul-de-sac quadrants, and ends of returns.
2. Contraction joints shall be constructed a minimum of 12' apart.
3. Joint sealer shall be required at all joints on arterial and industrial streets and at intersections on residential streets.


Revised 5/13/13 to add rebar for Type 2 - AEG

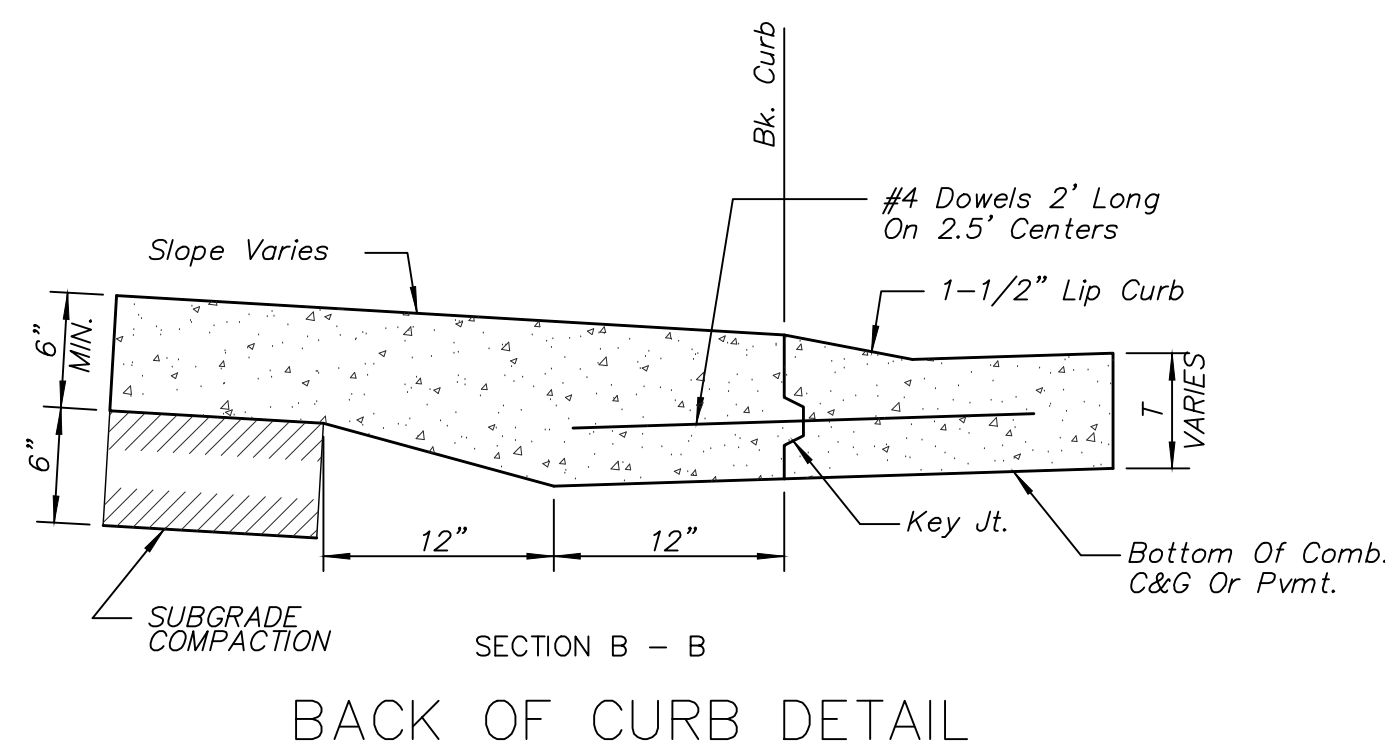


BACK OF CURB DETAIL

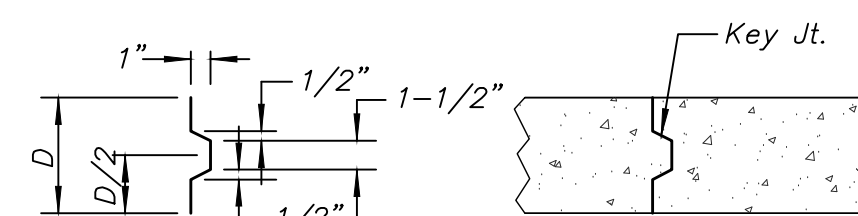

ALT. LONGITUDINAL CONSTRUCTION JOINT

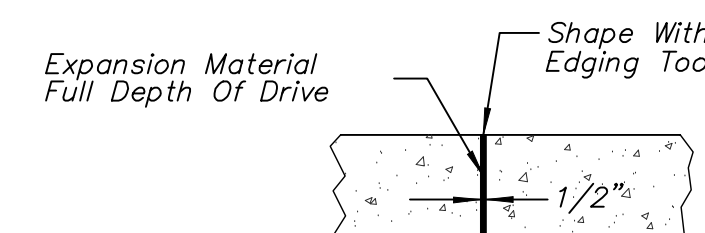

EXPANSION JOINT (E.J.)

 <p><b>CITY OF WICHITA</b> PUBLIC WORKS &amp; UTILITIES ENGINEERING DIVISION</p>				<p><b>CURB &amp; GUTTER DETAILS</b></p>	
				<p>CITY ENGINEER <b>Gary Janzen, P.E. Interim City Engineer</b></p>	
PROJECT NUMBER	OCA NUMBER	DATE		12/2010	
CITY ENGINEER'S OFFICE CITY HALL - SEVENTH FLOOR 455 NORTH MAIN STREET WICHITA, KANSAS 67202-1620 (316) 268-4501		DESIGN Staff	DRAWN Staff	SHEET 3 of 23	