




COMBINED CURB & GUTTER (6")

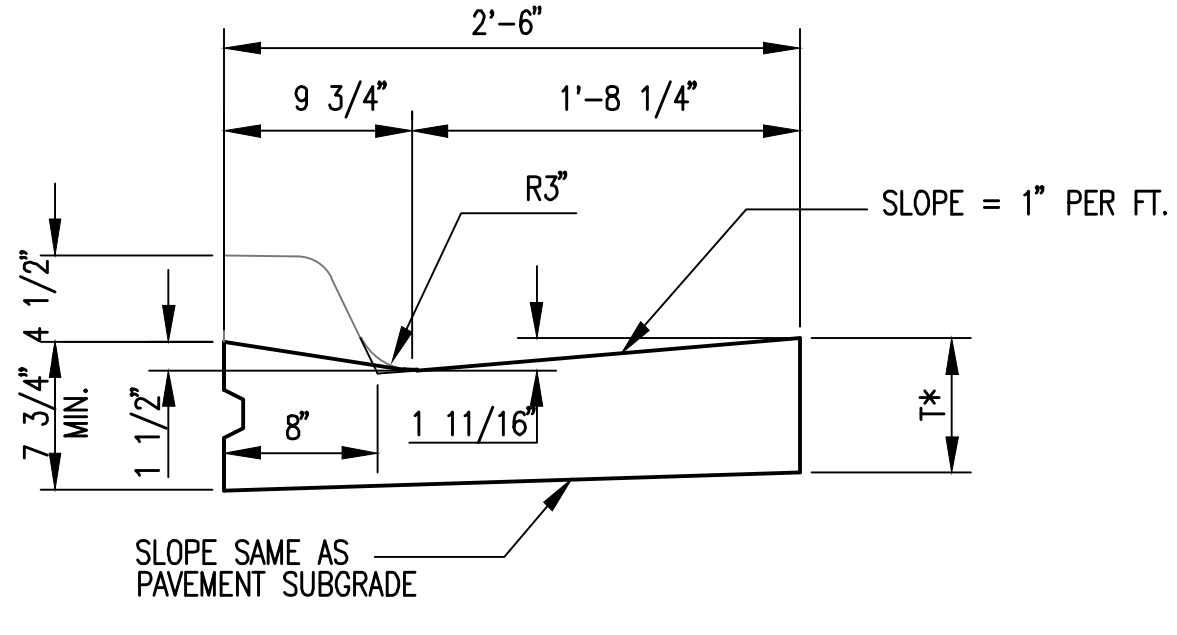


COMBINED CURB & GUTTER (1 1/2")

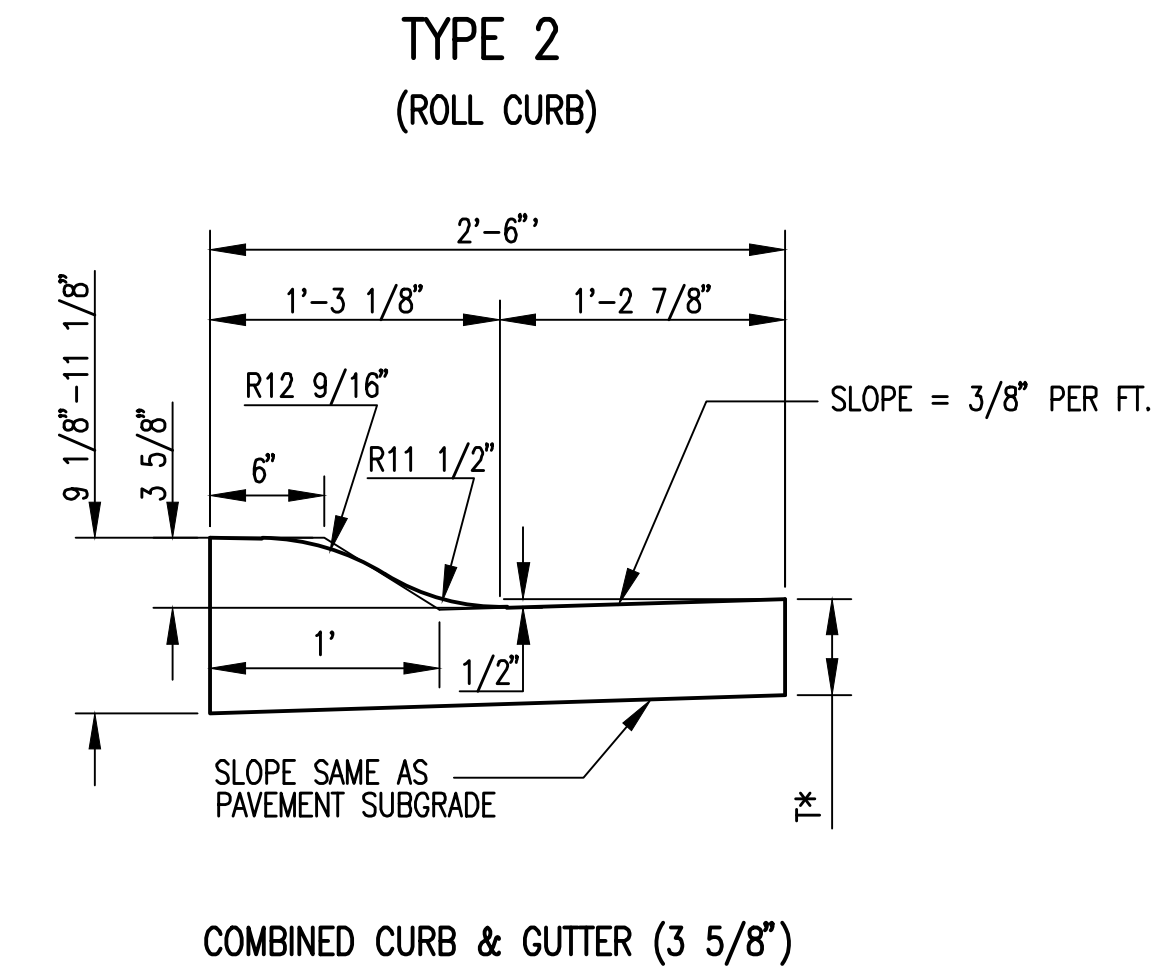


COMBINED CURB & GUTTER (3 5/8")

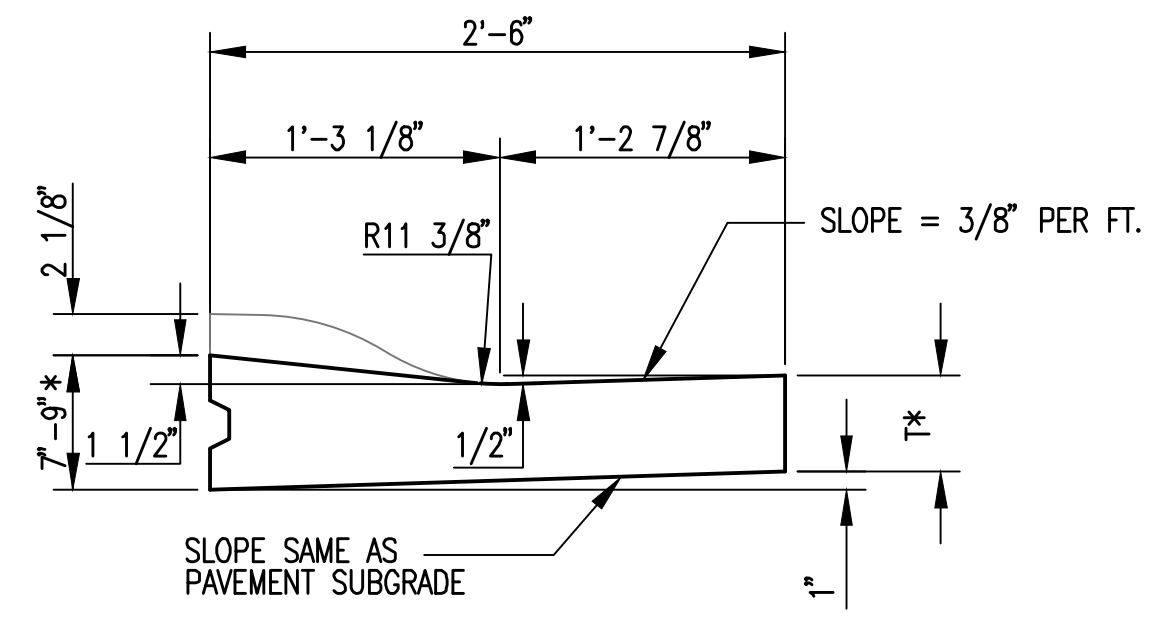


COMBINED CURB & GUTTER (1 1/2")

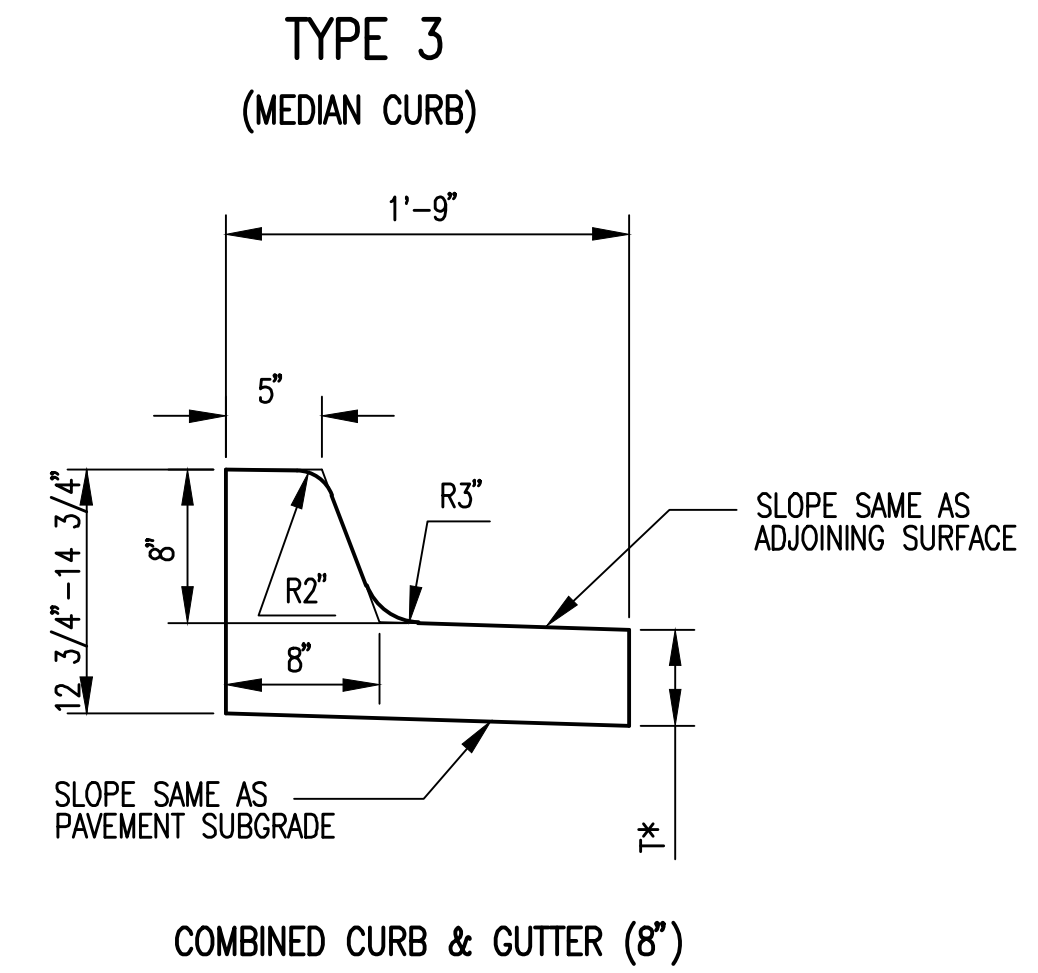


COMBINED CURB & GUTTER (8")

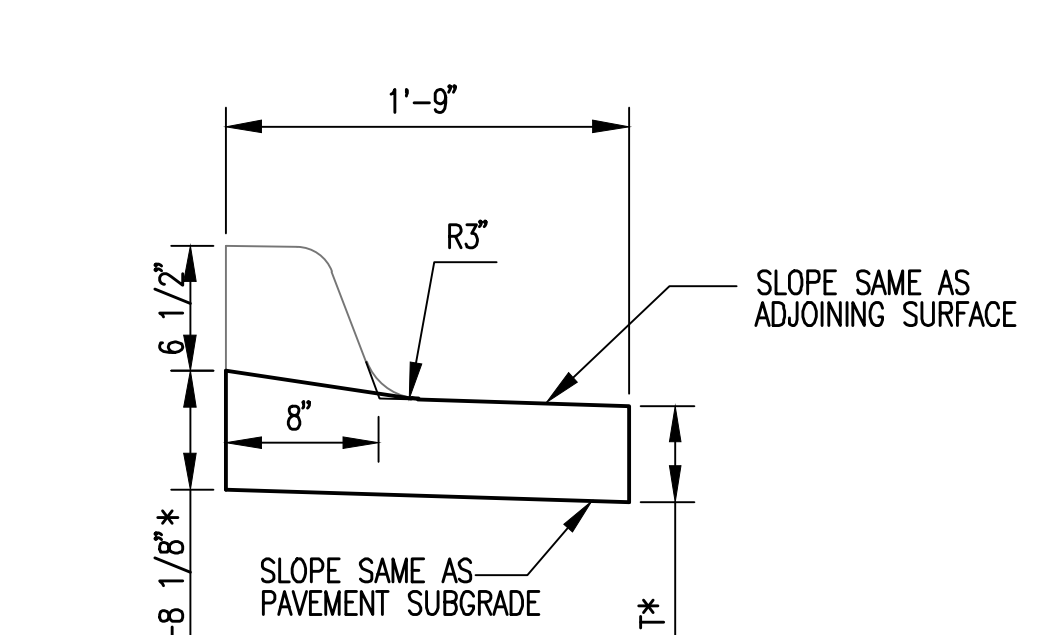

COMBINED CURB & GUTTER (1 1/2")

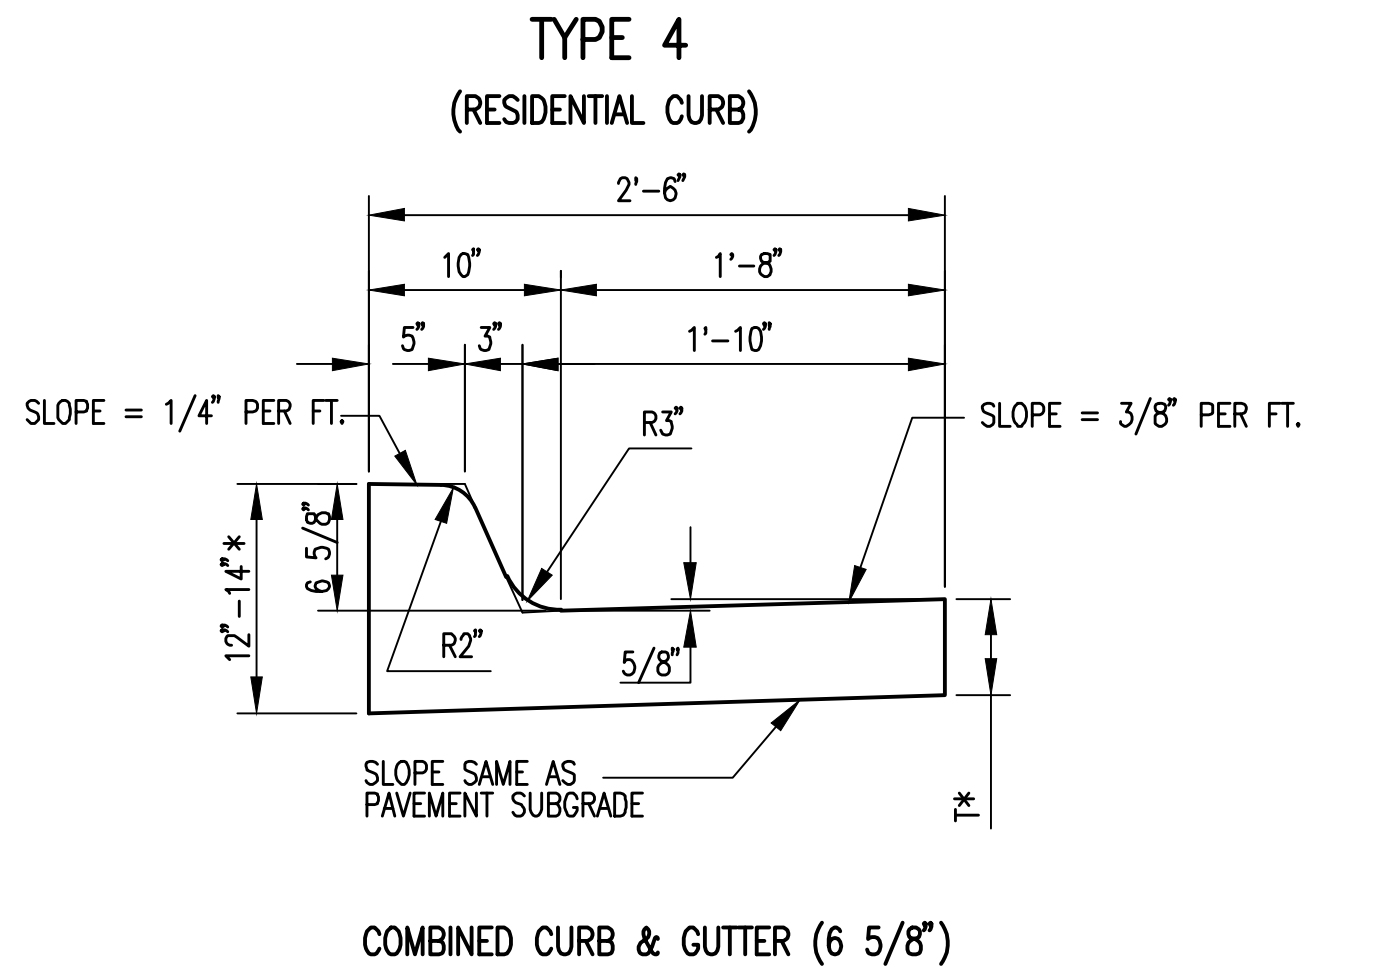

COMBINED CURB & GUTTER (6 5/8")

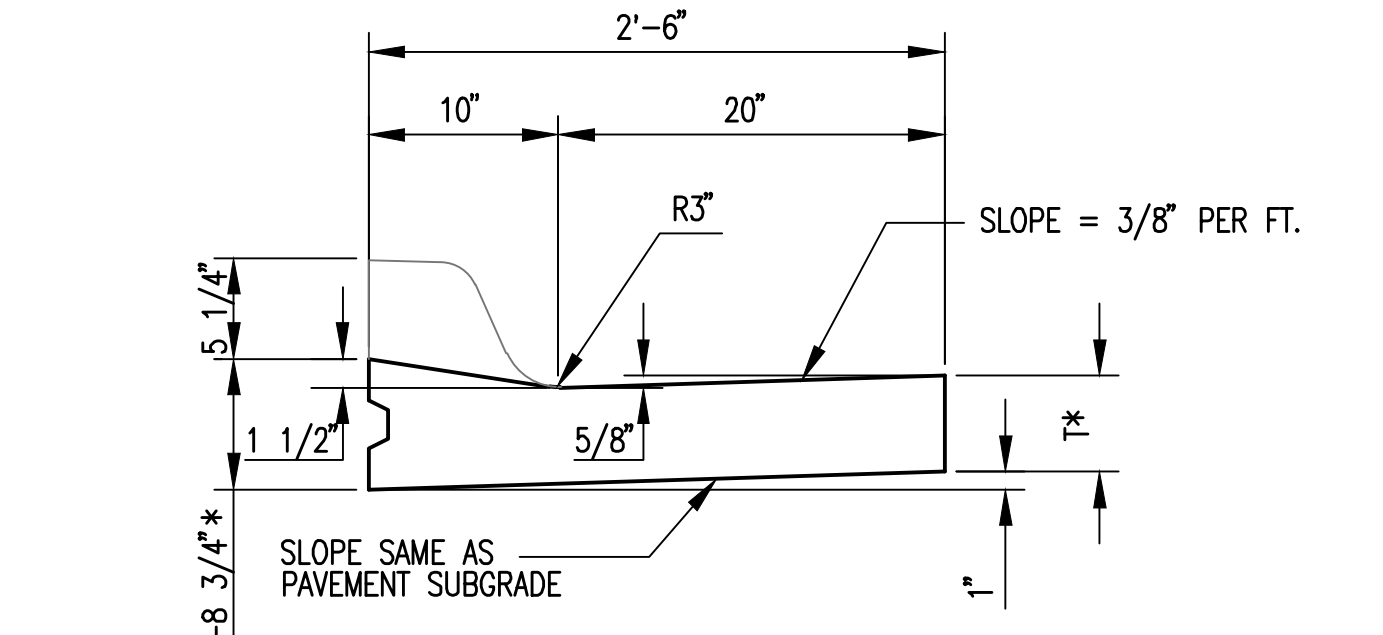


COMBINED CURB & GUTTER (1 1/2")


T* = THICKNESS OF CURB TO ADJUST WITH PAVEMENT THICKNESS

GENERAL NOTES


1. EXPANSION (ISOLATION) JOINTS SHALL BE CONSTRUCTED A MAXIMUM OF 300' APART AND AT ALL PIS, PCS, CUL-DE-SAC QUADRANTS, AND ENDS OF RETURNS.
2. CONTRACTION JOINTS SHALL BE CONSTRUCTED A MINIMUM OF 12' APART.
3. JOINT SEALER SHALL BE REQUIRED AT ALL JOINTS ON ARTERIAL AND INDUSTRIAL STREETS AND AT INTERSECTIONS ON RESIDENTIAL STREETS.

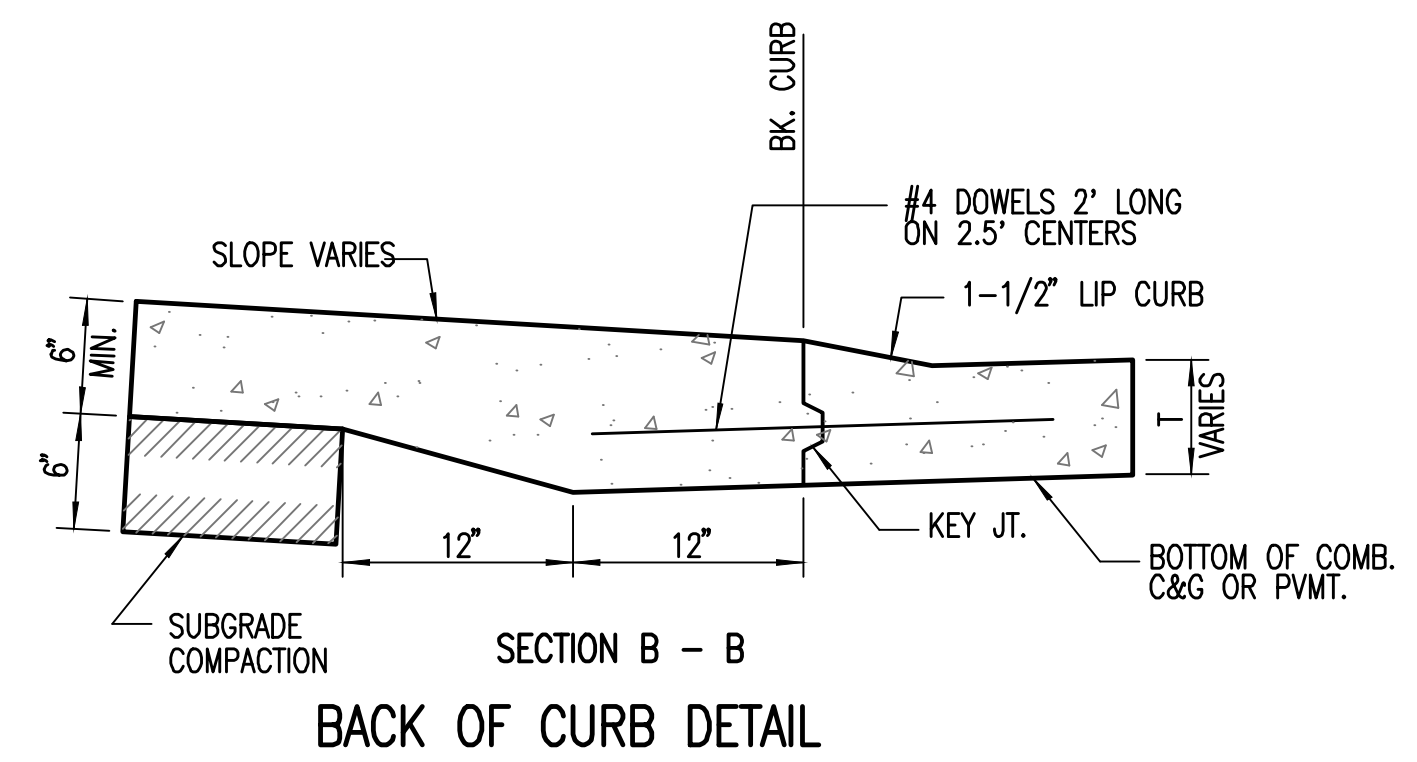

SECTION B - B
BACK OF CURB DETAIL

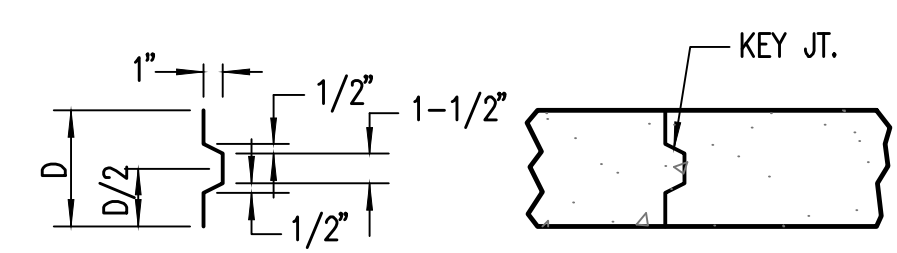

ALT. LONGITUDINAL CONSTRUCTION JOINT

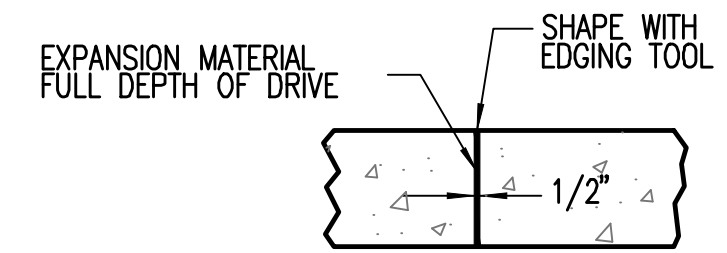

EXPANSION JOINT (E.J.)

Sheet 12-04-2013 4:05:30 PM by BJS
 Plot Date 11-01-12 12:12:2013 8:57:42 AM by BJS
 C:\2012\12588\000_001\12588-001-16C-CURB AND GUTTER DETAILS



CURB & GUTTER DETAILS		
CITY ENGINEER GARY JANZEN, P.E.		
PROJECT NUMBER 472-84607	OCA NUMBER 766294	DATE 12/2010
CITY ENGINEER'S OFFICE CITY HALL - SEVENTH FLOOR 455 NORTH MAIN STREET WICHITA, KANSAS 67202-1620 (316) 268-4501		DESIGN DRAWN SHEET 16 of 65