




COMBINED CURB & GUTTER (6")

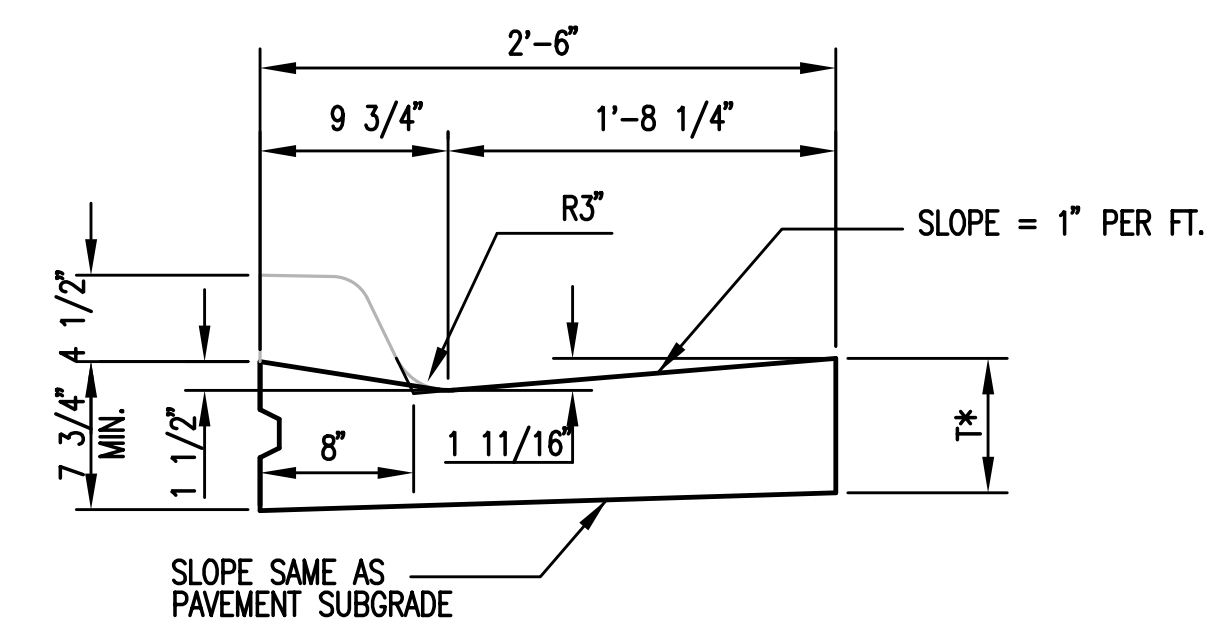


COMBINED CURB & GUTTER (1 1/2")

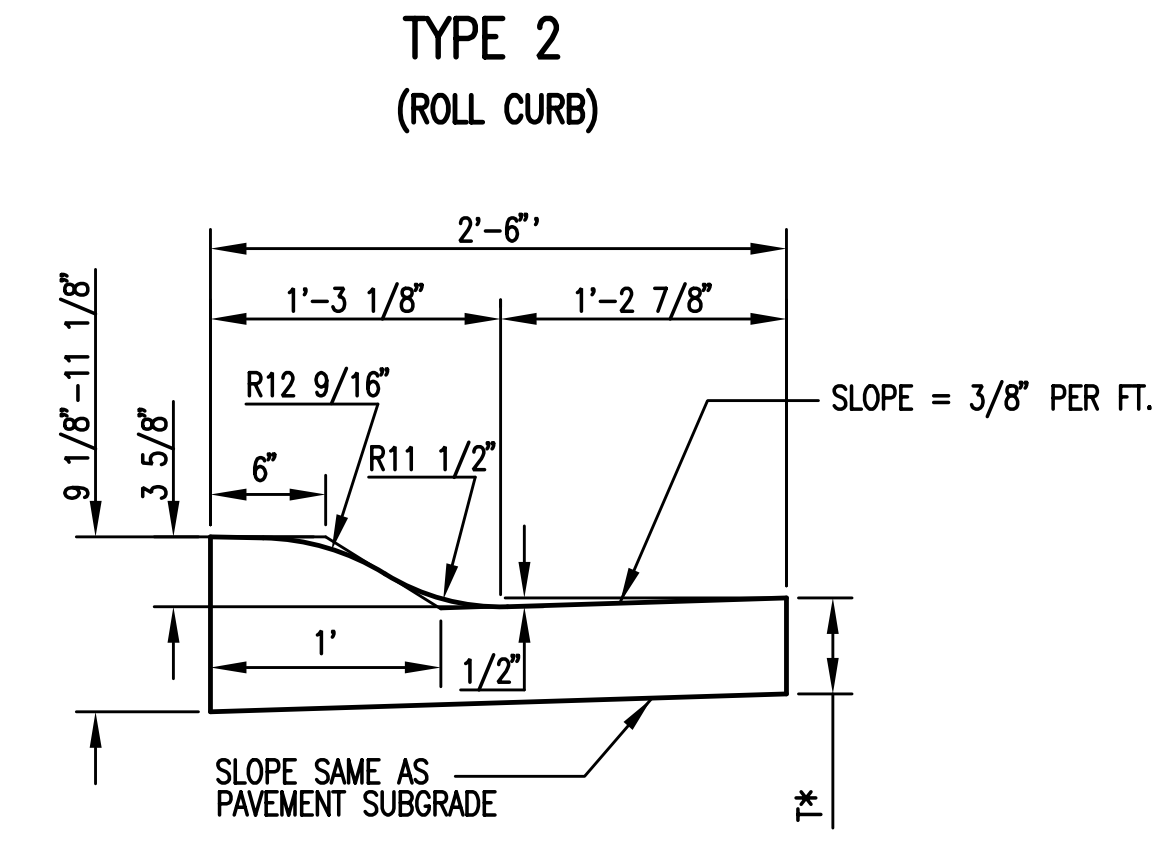


COMBINED CURB & GUTTER (3 5/8")

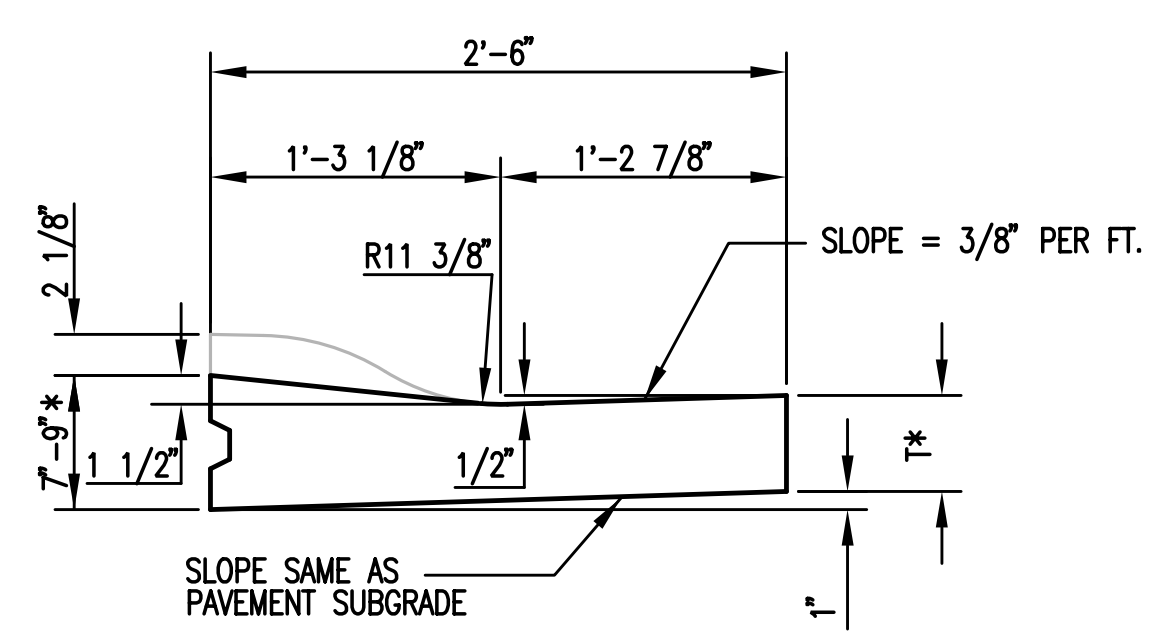


COMBINED CURB & GUTTER (1 1/2")

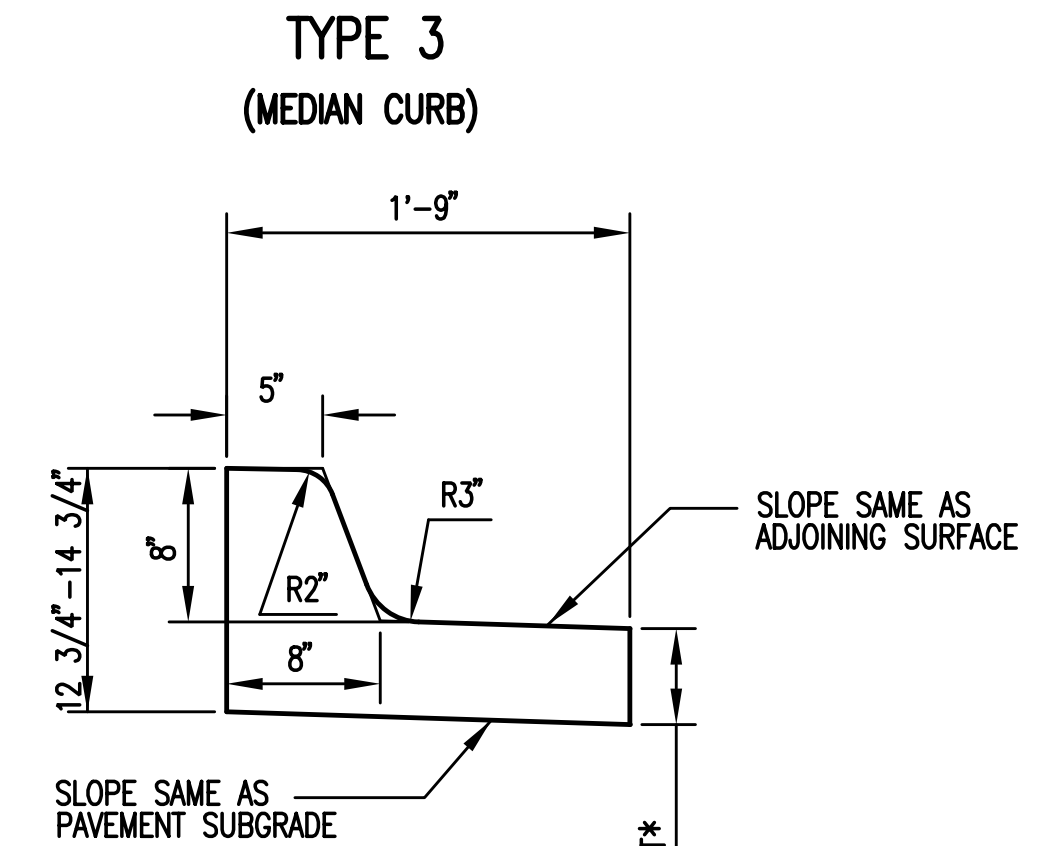


COMBINED CURB & GUTTER (8")

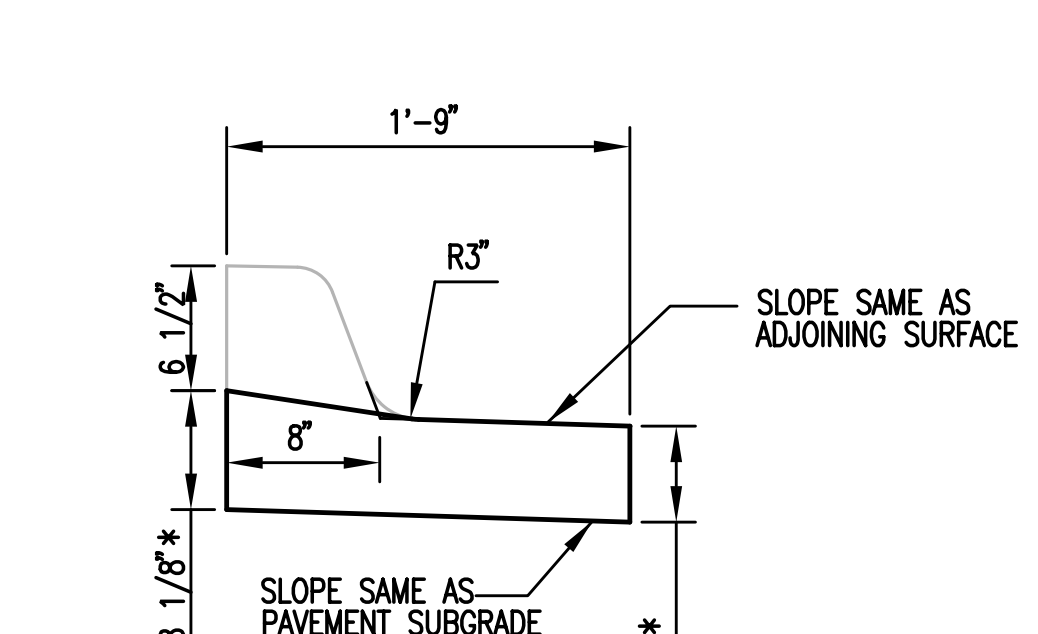

COMBINED CURB & GUTTER (1 1/2")

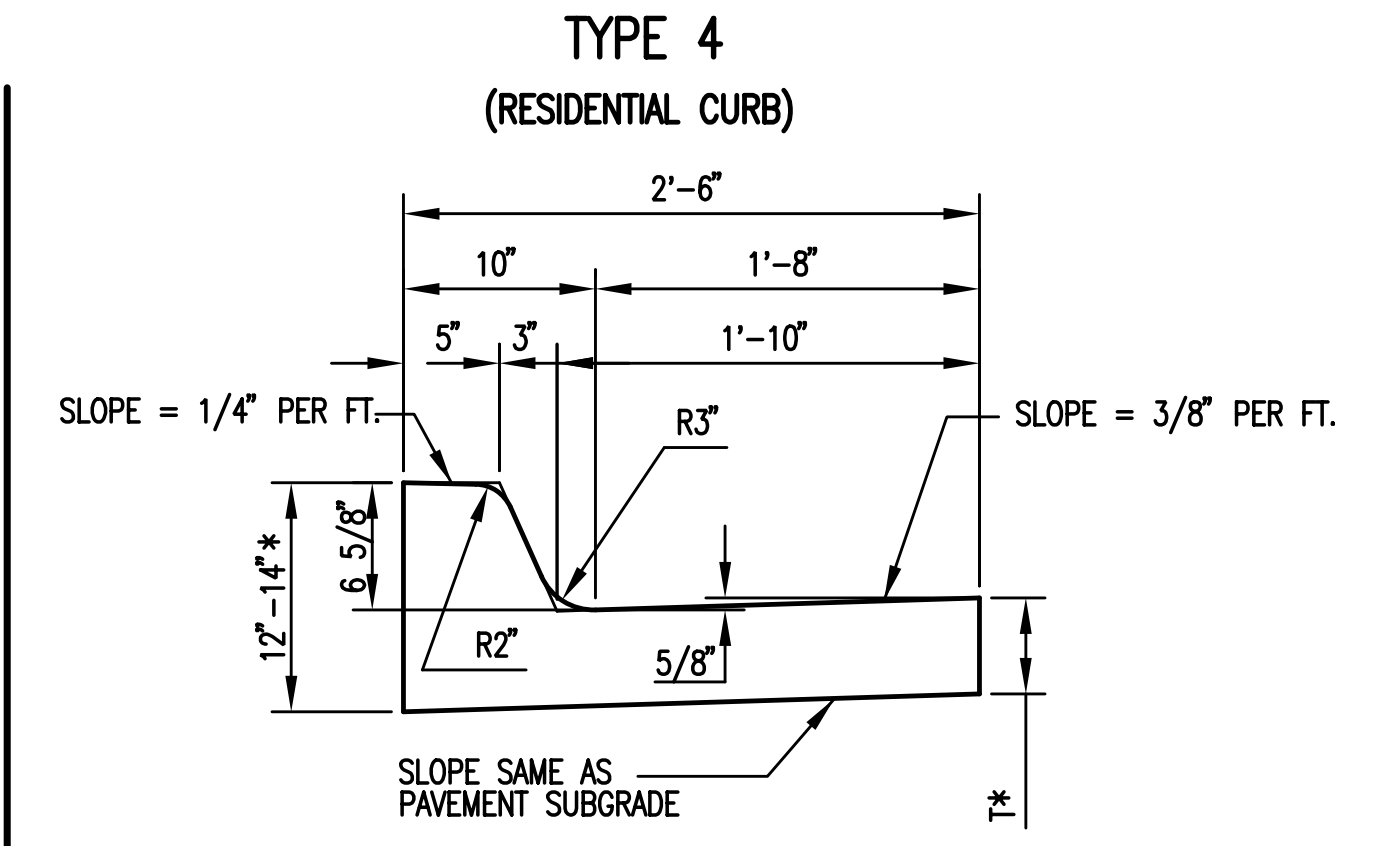

COMBINED CURB & GUTTER (6 5/8")

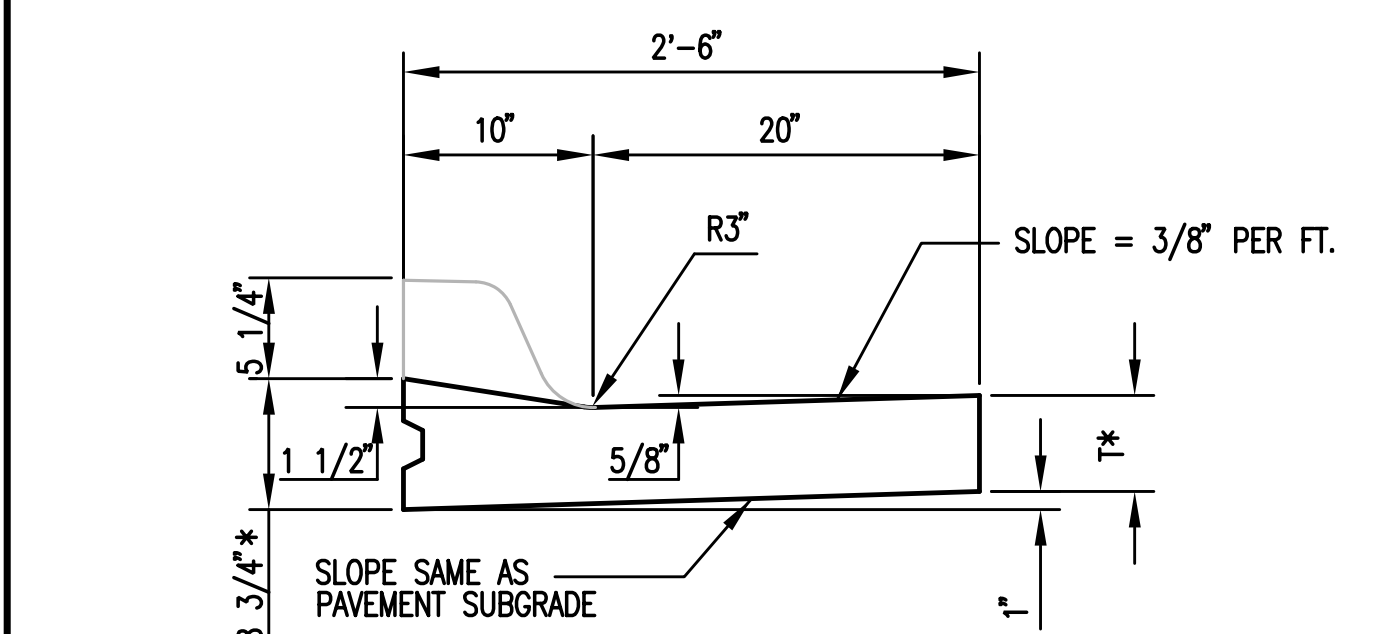


COMBINED CURB & GUTTER (1 1/2")

When plans indicate curb type to be "Special", the curb gutter pan shall be sloped the same as adjacent pavement.


T* = THICKNESS OF CURB TO ADJUST WITH PAVEMENT THICKNESS

GENERAL NOTES


1. EXPANSION (ISOLATION) JOINTS SHALL BE CONSTRUCTED A MAXIMUM OF 300' APART AND AT ALL PIS, PCS, CUL-DE-SAC QUADRANTS, AND ENDS OF RETURNS.
2. CONTRACTION JOINTS SHALL BE CONSTRUCTED A MINIMUM OF 12' APART.
3. JOINT SEALER SHALL BE REQUIRED AT ALL JOINTS ON ARTERIAL AND INDUSTRIAL STREETS AND AT INTERSECTIONS ON RESIDENTIAL STREETS.

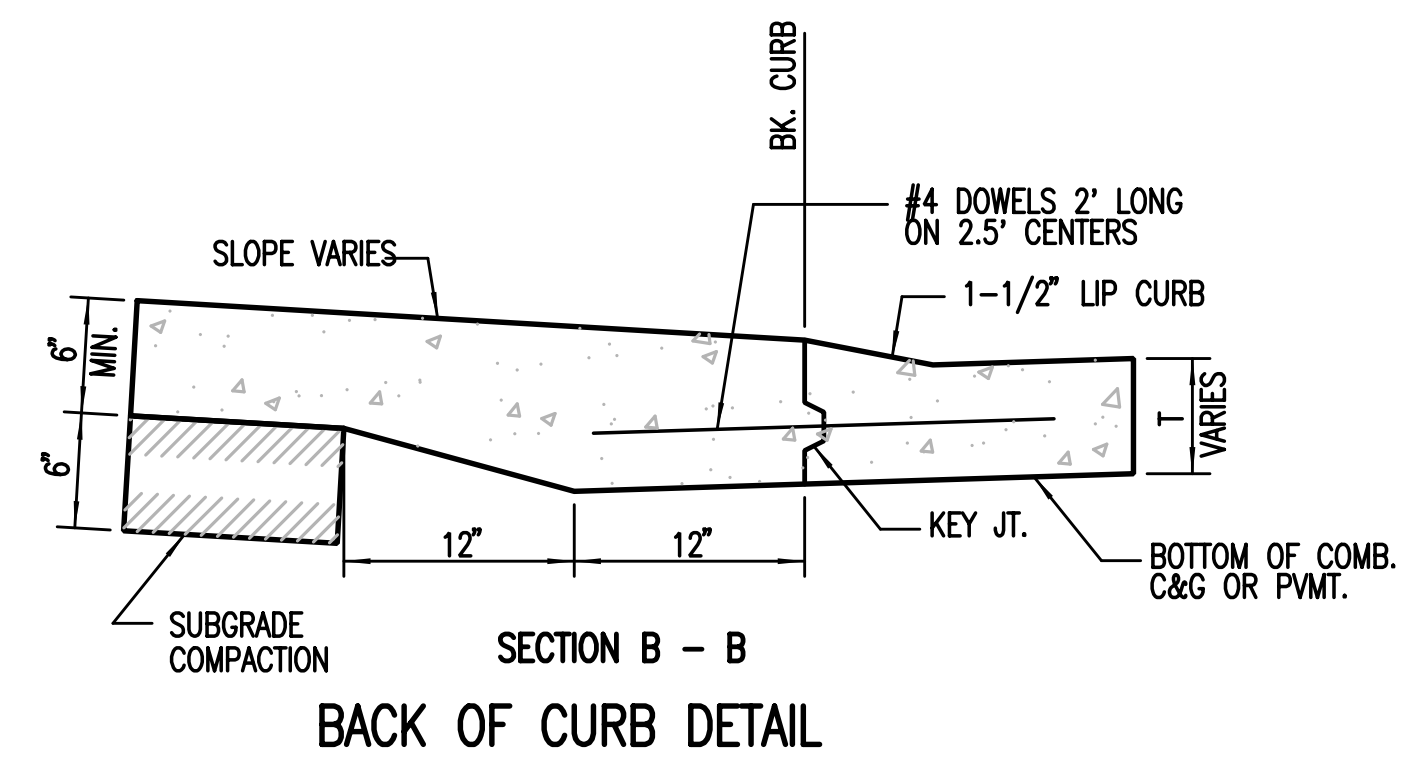

SECTION B - B
BACK OF CURB DETAIL

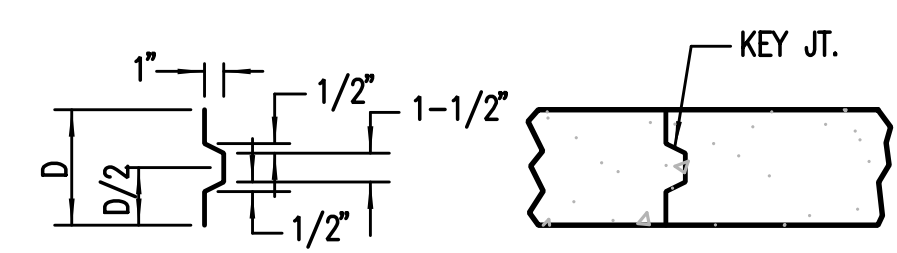

ALT. LONGITUDINAL CONSTRUCTION JOINT

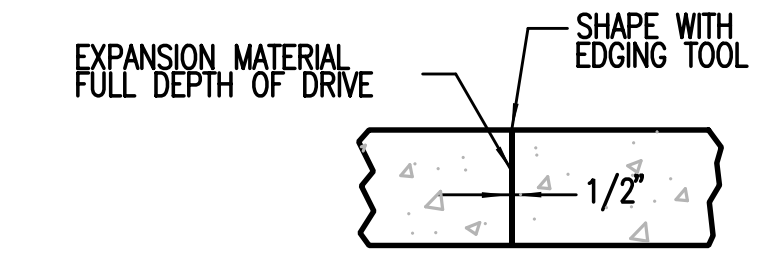

EXPANSION JOINT (E.J.)

Plotted By: drc Date: 1/15/2015 10:56:06 PM
 FILE: H:\2008\08807\001\Standards\08807-001_PV-101_Curb & Gutter.dwg

		CURB & GUTTER DETAILS	
		CITY ENGINEER GARY JANZEN, P.E.	
PROJECT NUMBER 472-84780	OCA NUMBER 706999	DATE 12/2010	
CITY ENGINEER'S OFFICE CITY HALL - SEVENTH FLOOR 455 NORTH MAIN STREET WICHITA, KANSAS 67202-1620 (316) 268-4501		DESIGN	DRAWN
		SHEET 50 of 227	