


CITY EMPLOYEES PARKING LOT. CENTRAL & WACO

PROJ. NO. 270-68-365-50216-430-000-000-000 CONSTRUCTION CONTRACT COSTS


PROJ. NO. 270-68-365-50216-111-000-000-000 CONSTRUCTION INSPECTION COSTS

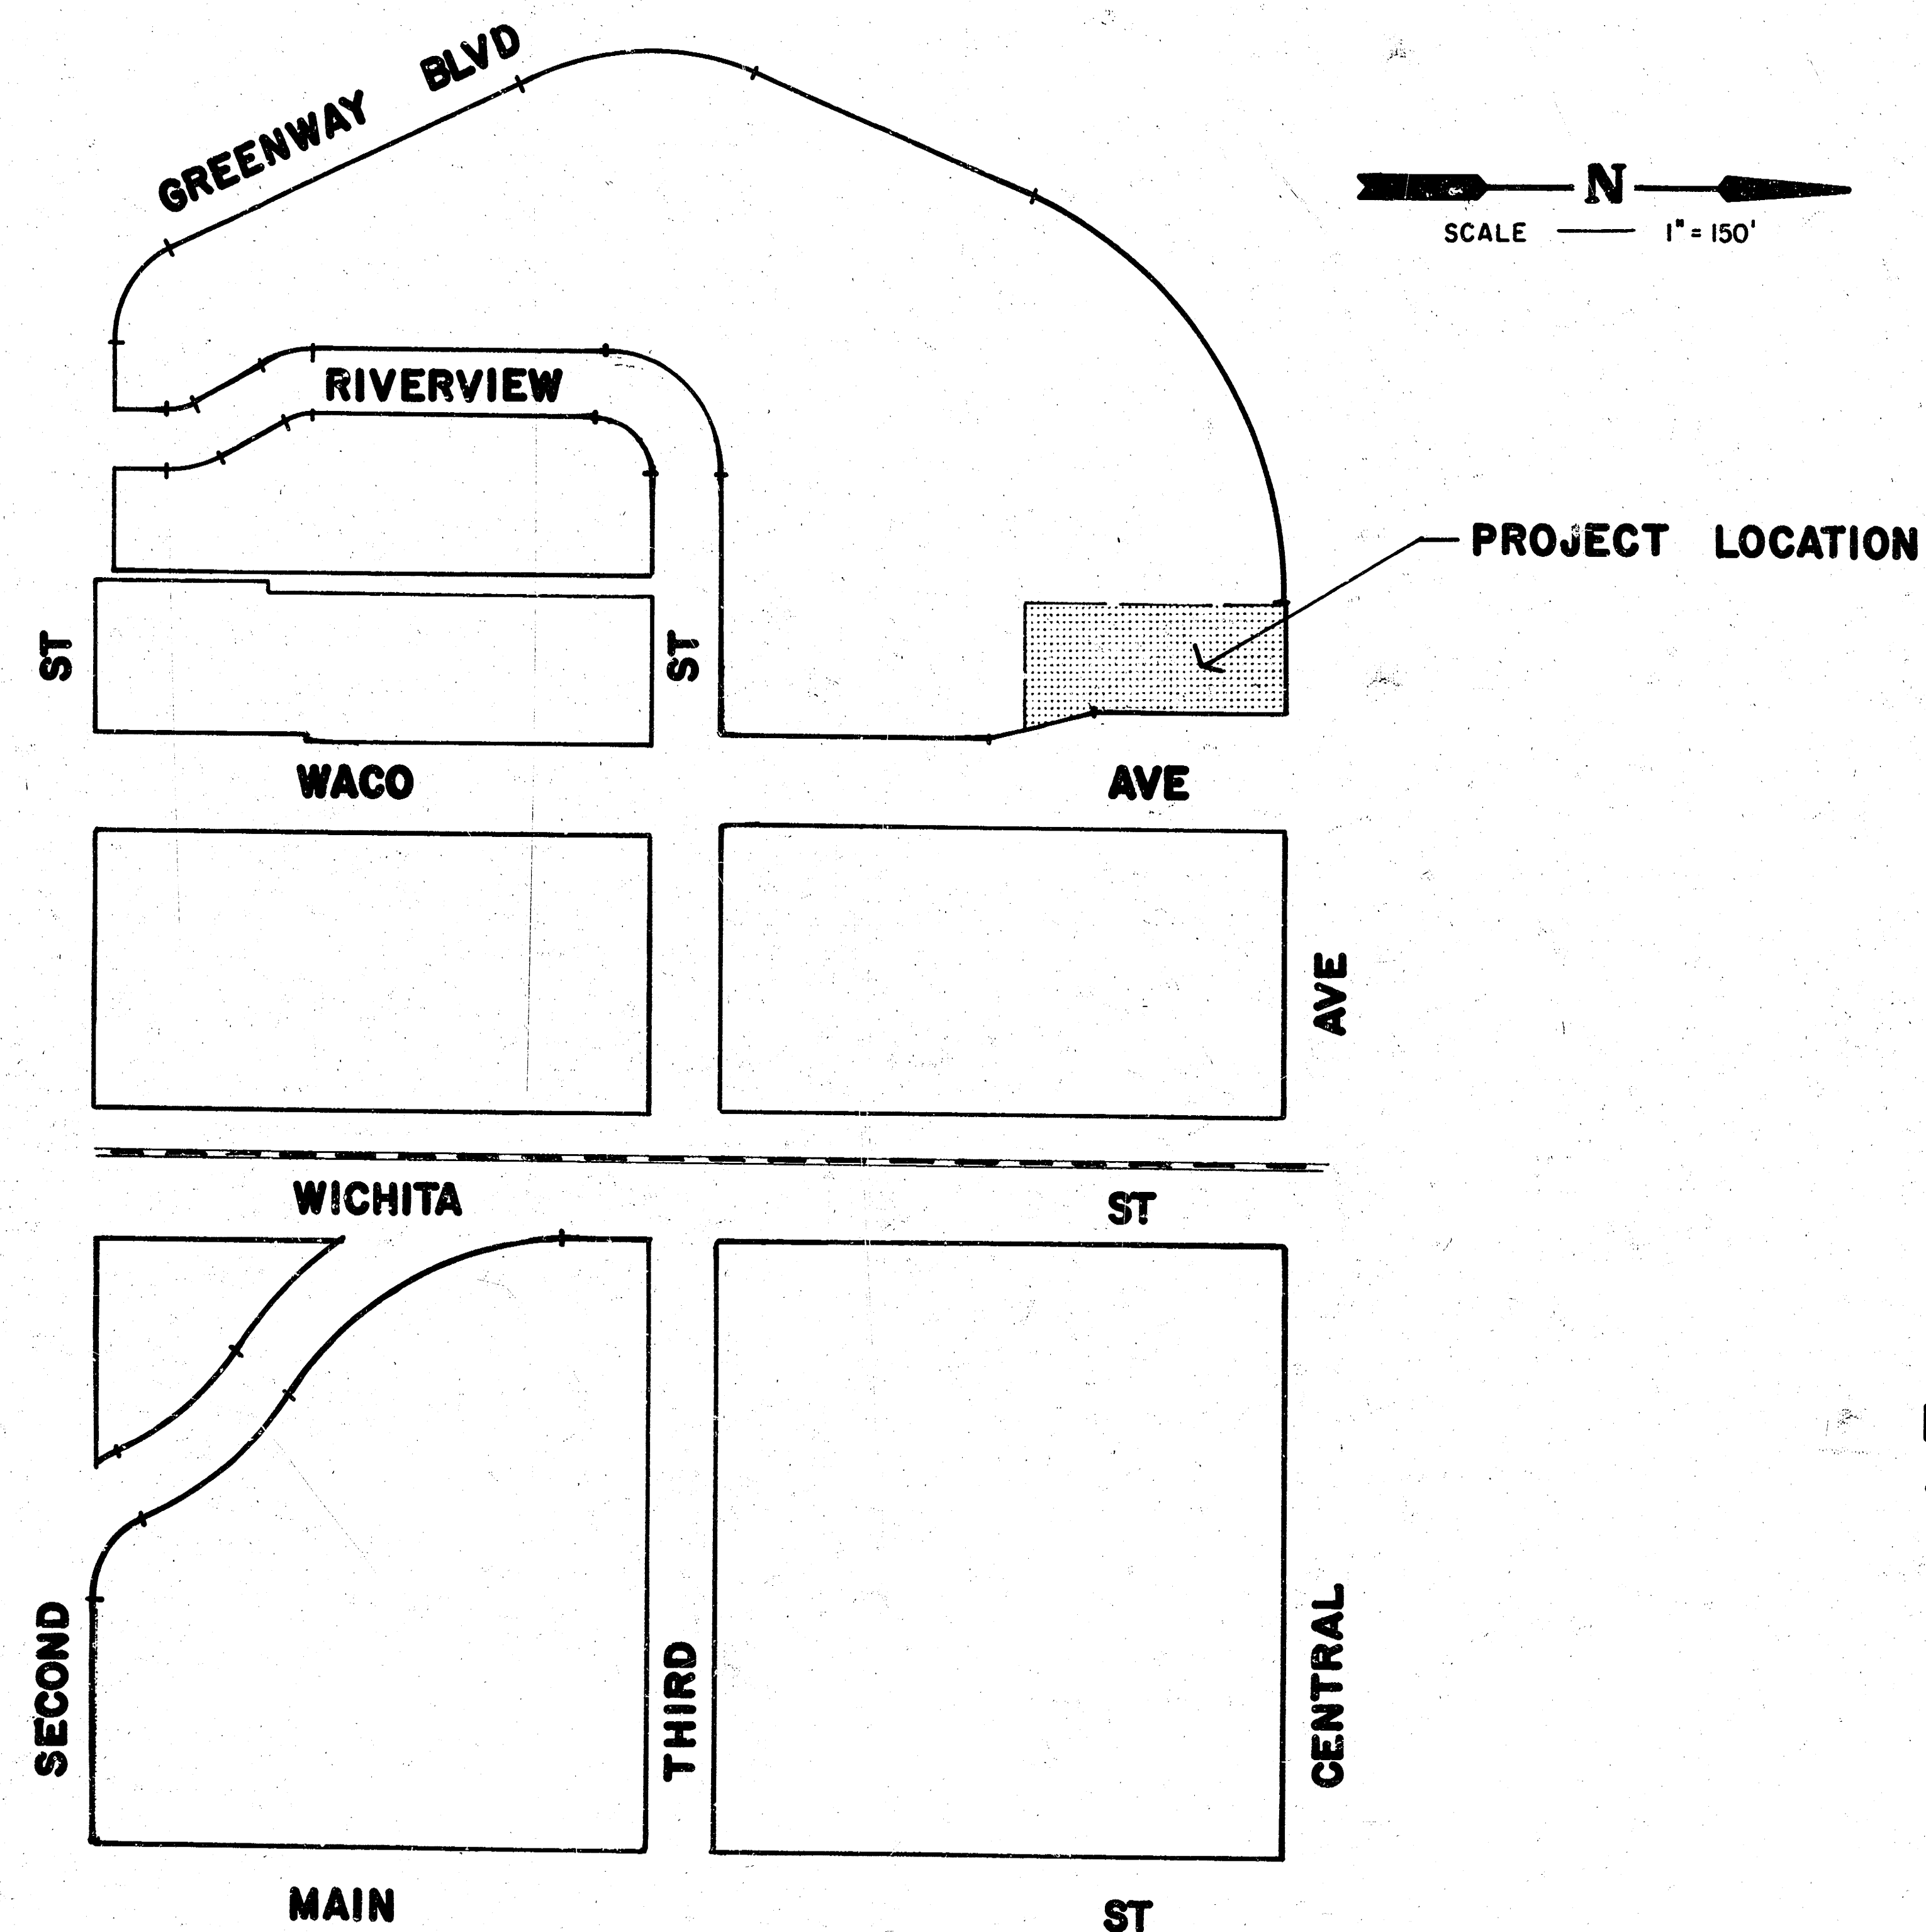

M.E. LINDEBAK
WICHITA, KANSAS

CITY ENGINEER



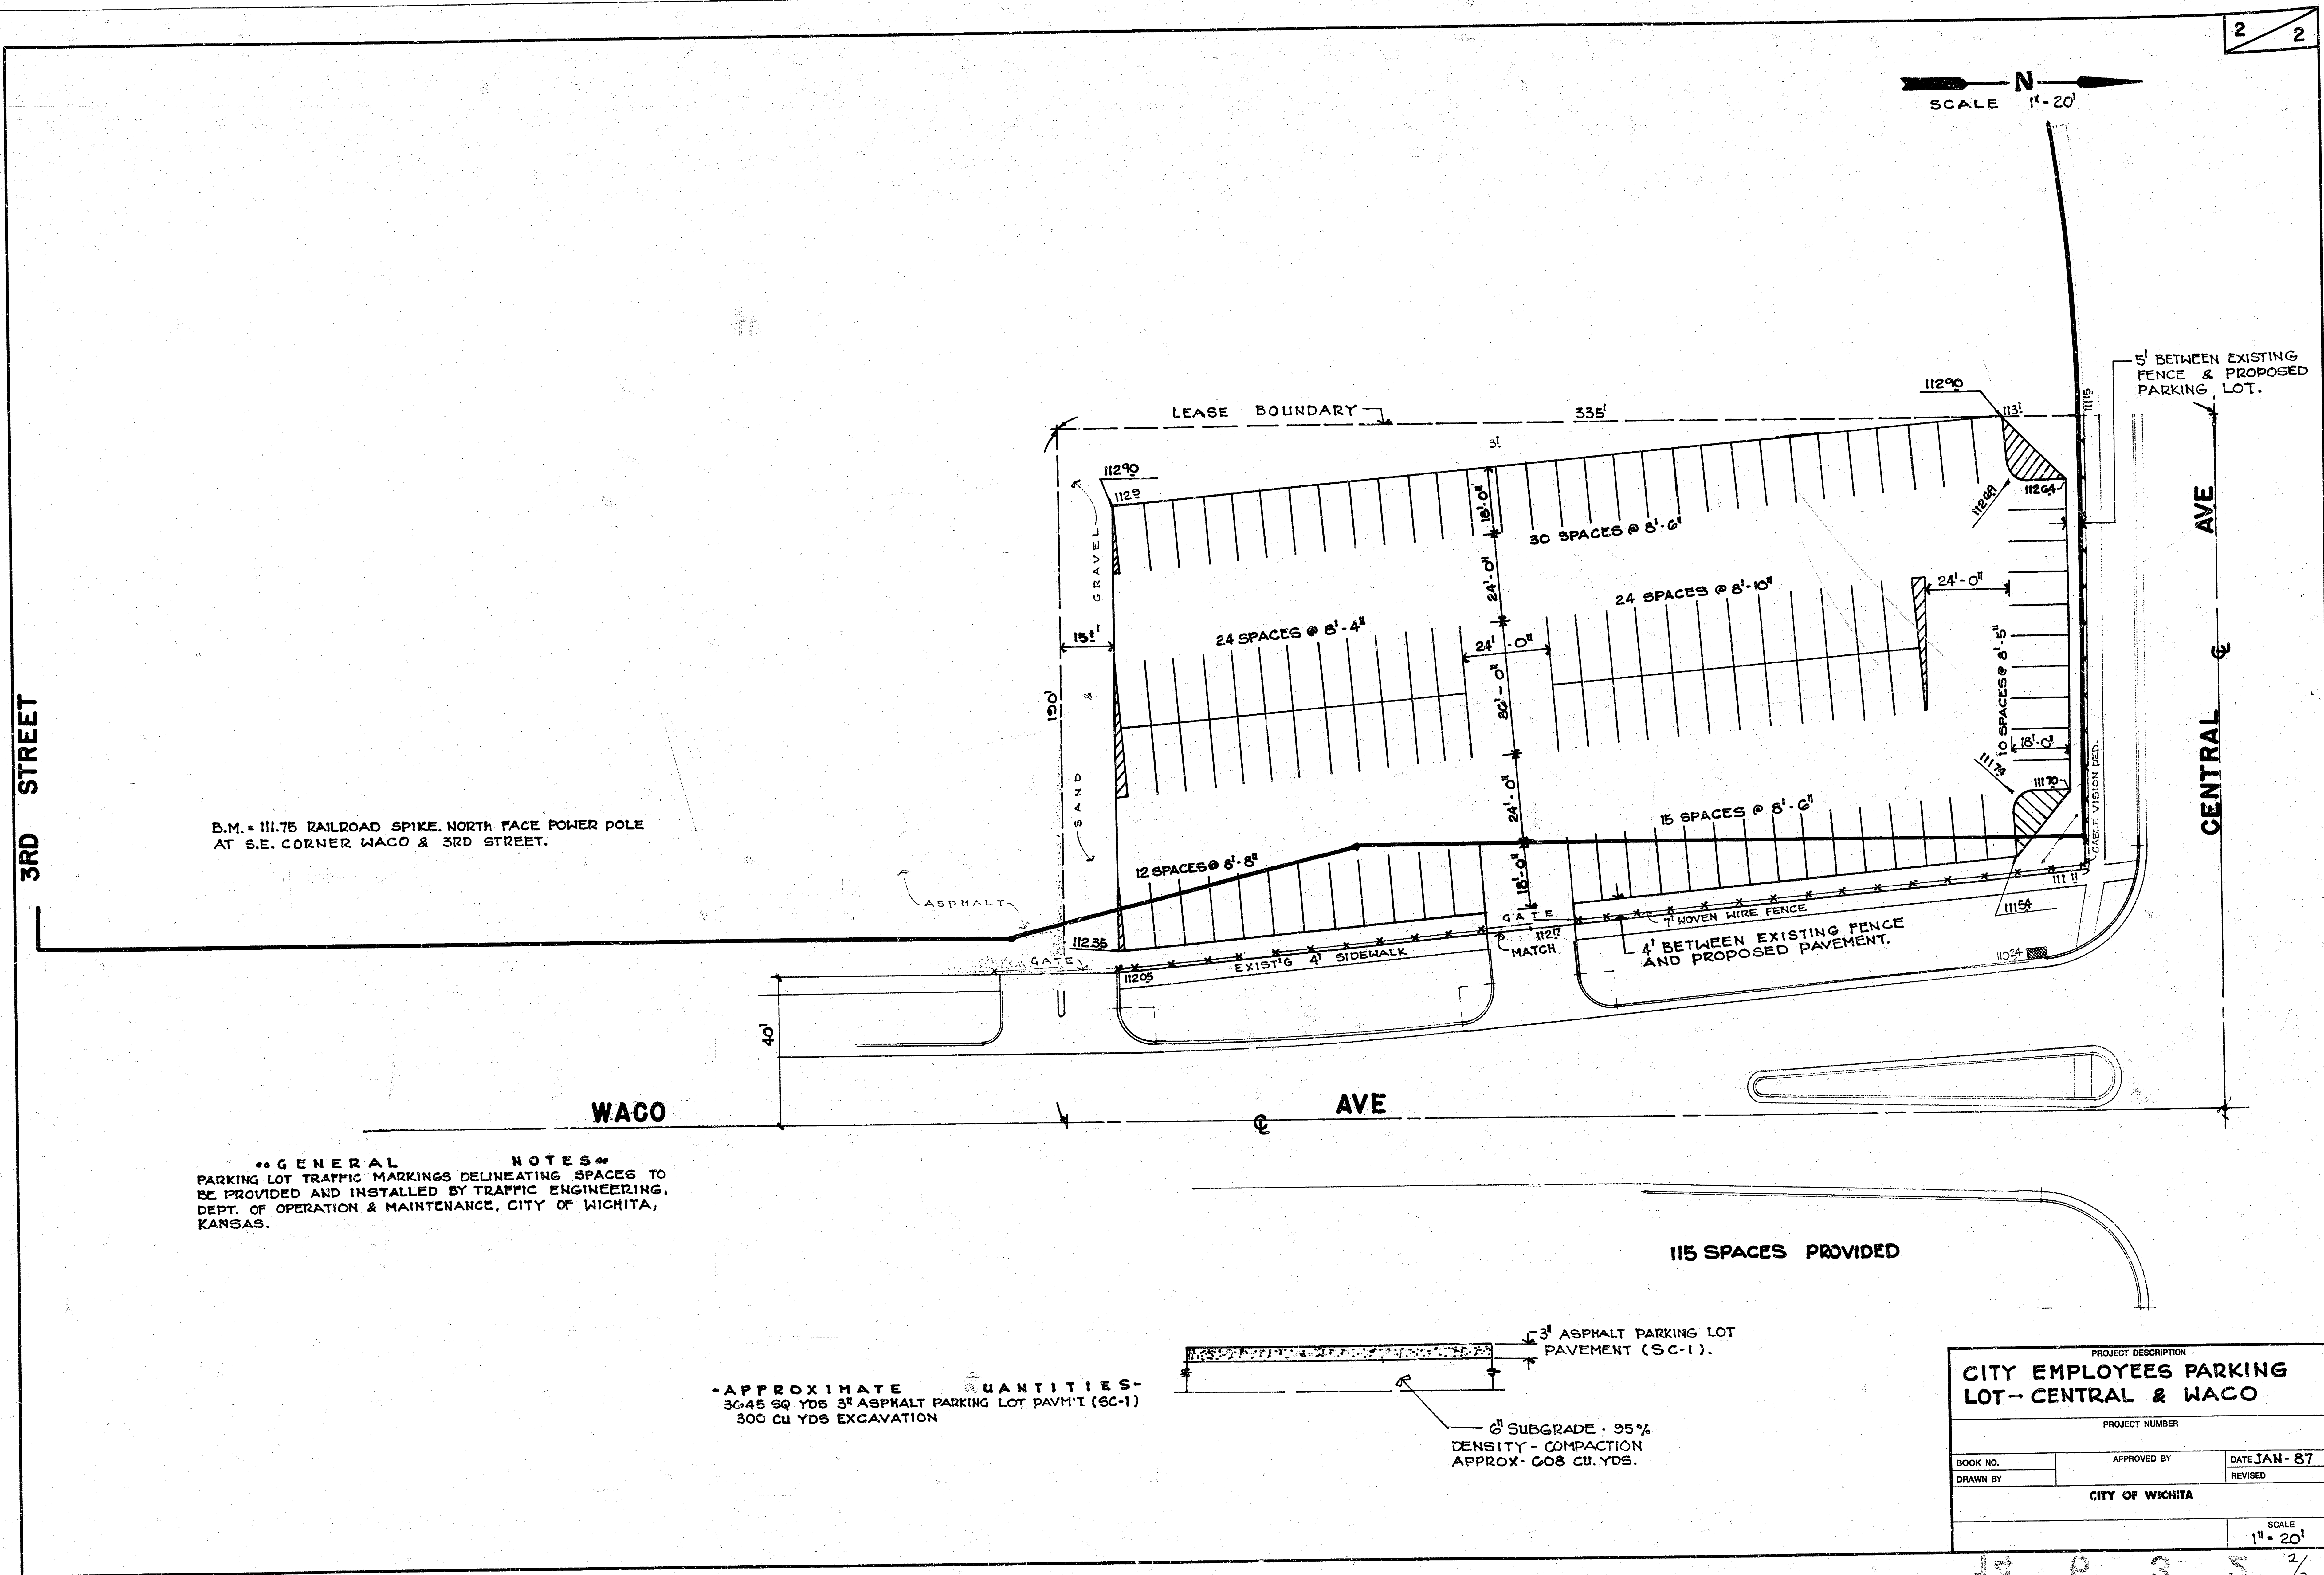

B.M. = 111.75 RAILROAD SPIKE, NORTH FACE POWER POLE
AT S.E. CORNER WACO & 3RD STREET.

GENERAL NOTES
PARKING LOT TRAFFIC MARKINGS DELINEATING SPACES TO
BE PROVIDED AND INSTALLED BY TRAFFIC ENGINEERING,
DEPT. OF OPERATION & MAINTENANCE, CITY OF WICHITA,
KANSAS.

APPROXIMATE QUANTITIES
3045 SQ YDS 3" ASPHALT PARKING LOT PAVMT (SC-1)
300 CU YDS EXCAVATION

3" ASPHALT PARKING LOT
PAVEMENT (SC-1).
6" SUBGRADE - 95%
DENSITY - COMPACTION
APPROX. 608 CU. YDS.

115 SPACES PROVIDED

PROJECT DESCRIPTION		
CITY EMPLOYEES PARKING LOT - CENTRAL & WACO		
PROJECT NUMBER		
BOOK NO.	APPROVED BY	DATE JAN - 87
DRAWN BY		REVISED
CITY OF WICHITA		
		SCALE 1" = 20'

FILMED FROM THE BEST
AVAILABLE COPY