


B.N. 163.3 R.R. Spike S.S. HLP SE 27th & Bluff.

Base = E Bluff Ave. North to 27th St.

1" = 50'

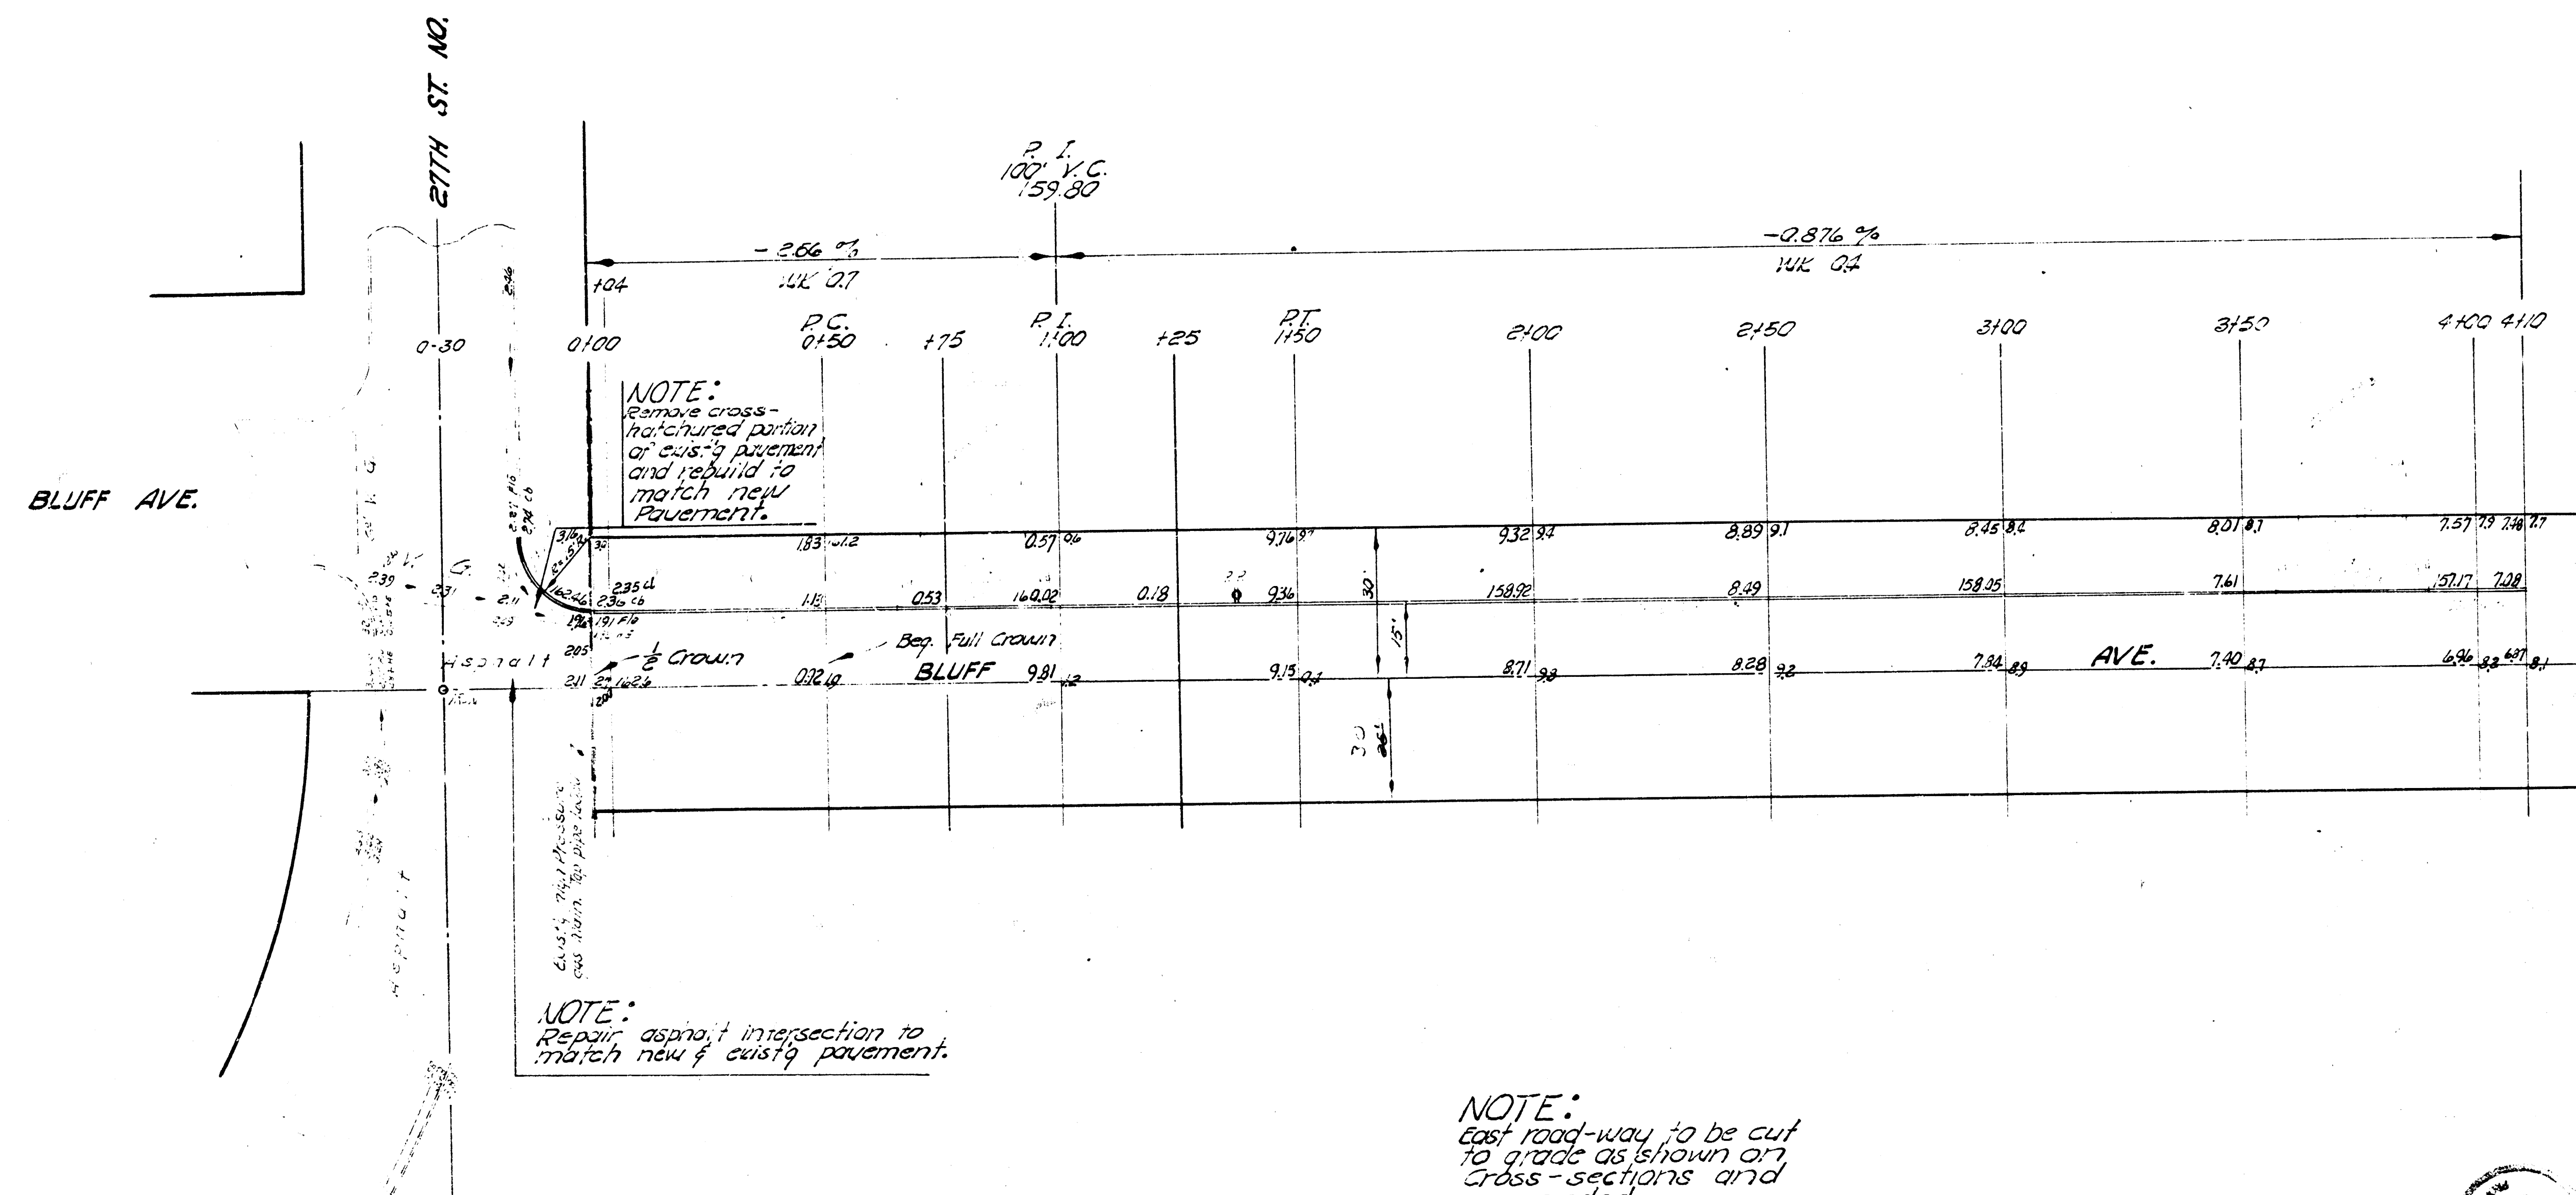

ESTIMATED QUANTITIES		
715	Sq Yds 6 Conc. Pavt	
435	lin. ft Reinf. int. cb	
2375	lbs. Reinf. Steel	
595	Sq Yds Excavation	
10	Sq Yds Pavt removal	
5	Tons Asphalt	
25	Tons sand, Re-surfacing	

NOTE:
No drive-way quantities estimated.

BLUFF AVE.
NL 27TH ST. TO 410' N. OF NL 27TH
15' CONC. & CB WEST SIDE
CITY OF WICHITA, KANSAS
B. E. SMITH CITY ENGINEER
JULY 1958, PRIVATE CONTRACT

