


TYPICAL PLAN VIEW OF
 TEMPORARY BERM AND
 TEMPORARY SLOPE DRAIN


NO SCALE

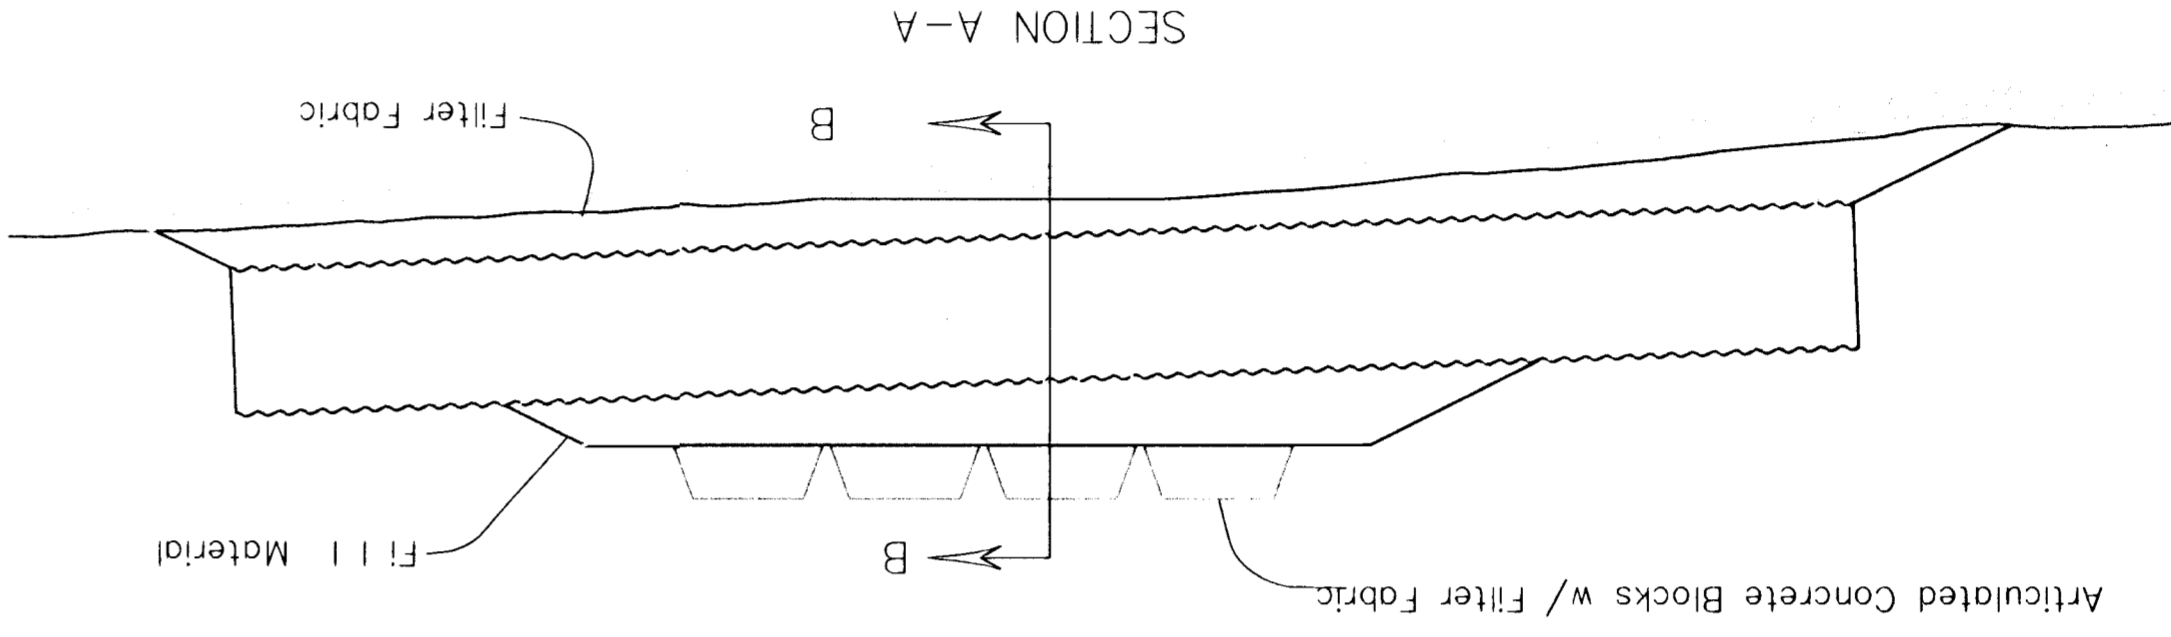

TEMPORARY STREAM CROSSING (ARTICULATED CONCRETE BLOCKS)


NO SCALE

NOTE:
 Quantity, length and diameter
 of steel pipe to be determined
 by design flow calculations.

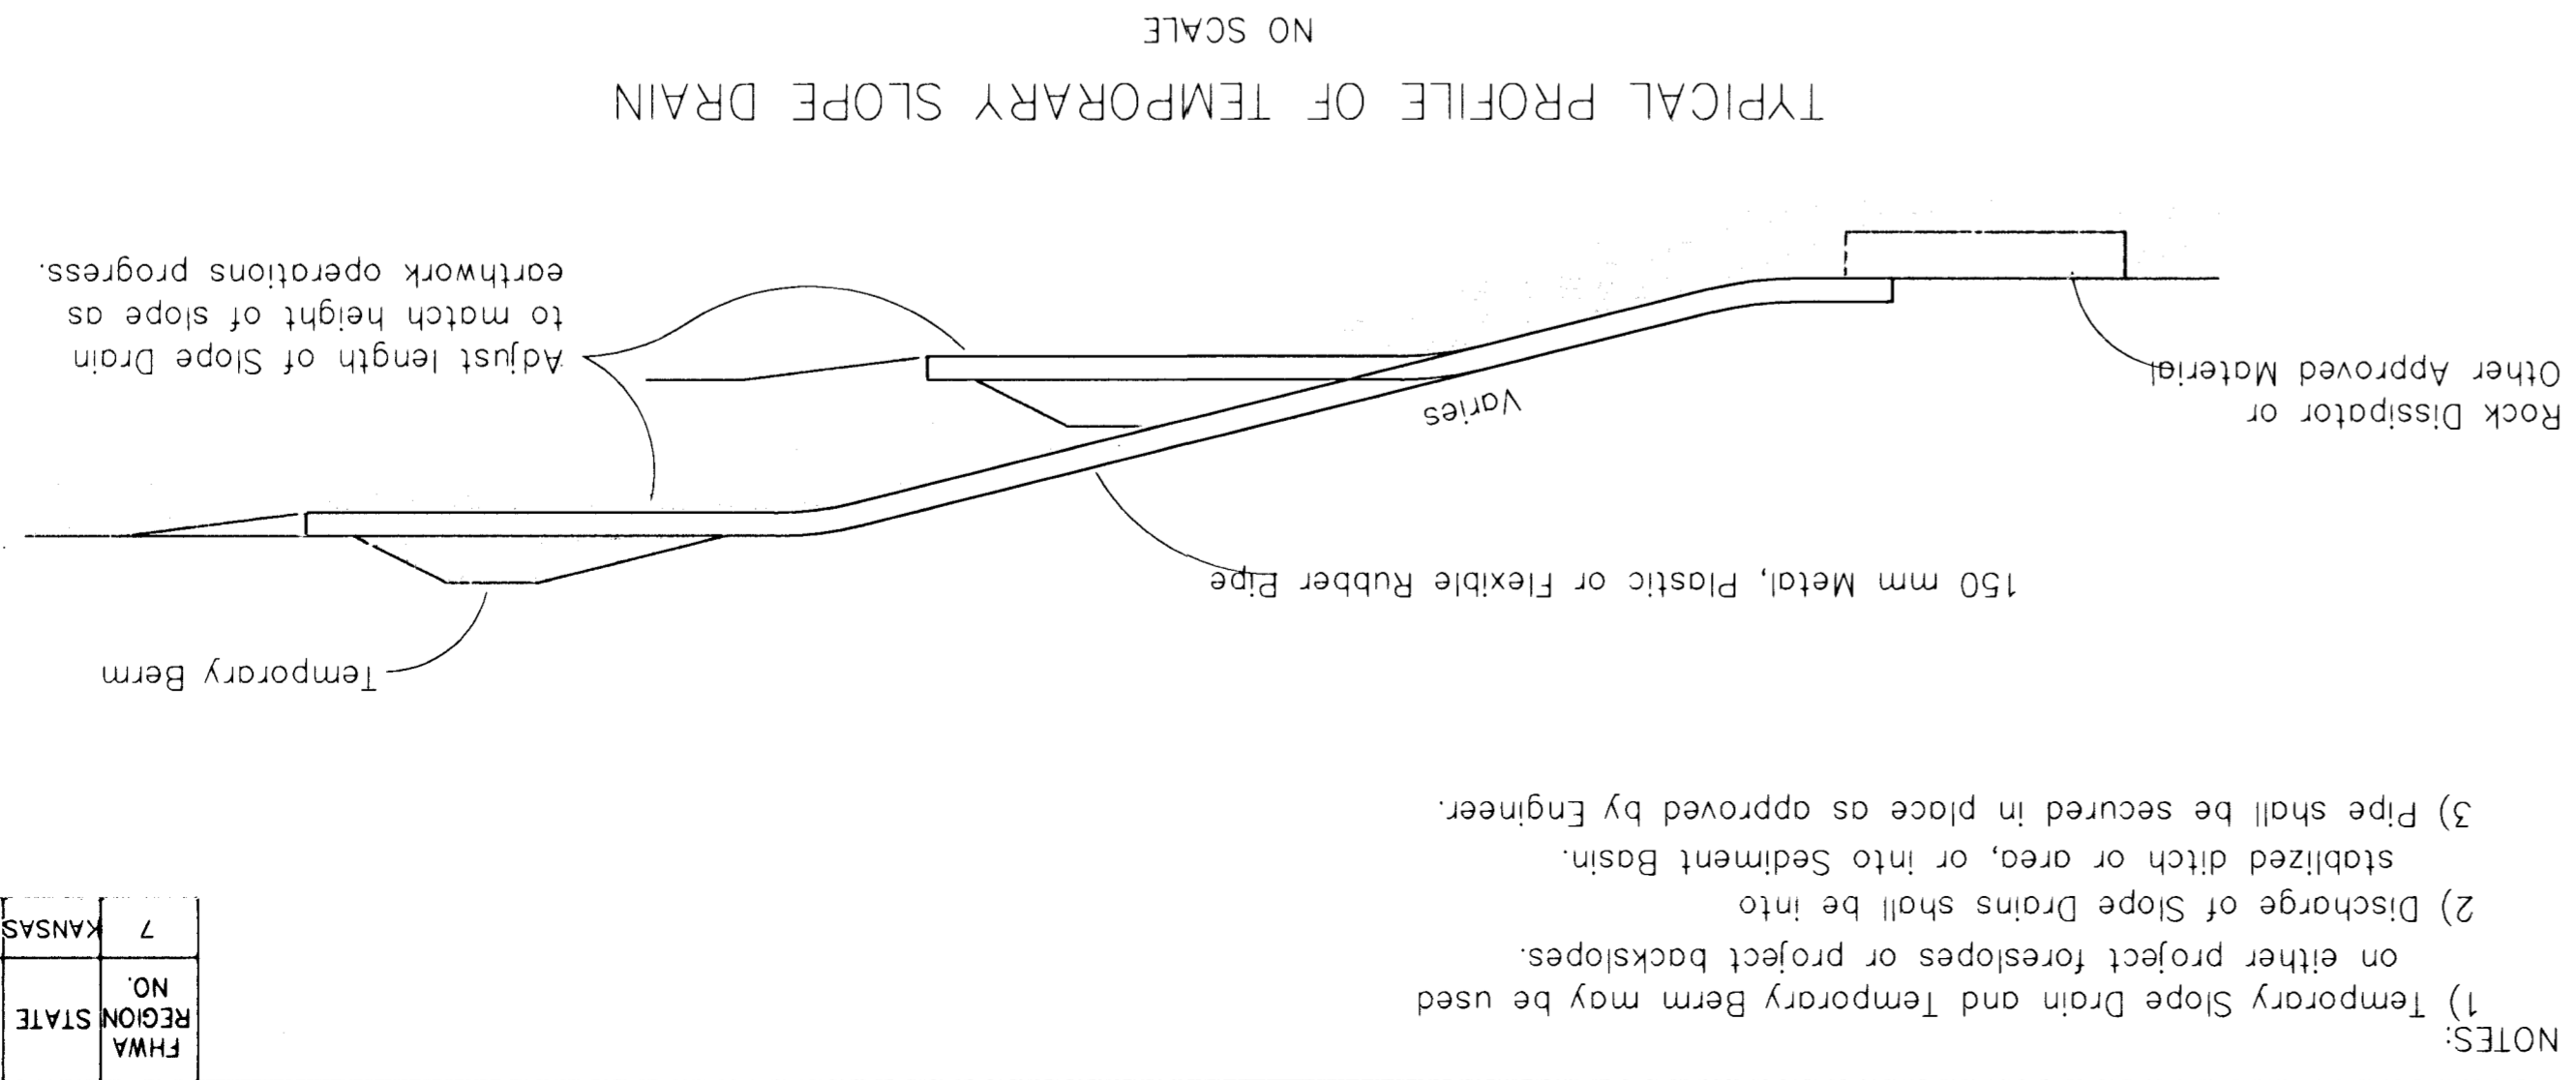


TYPICAL PROFILE OF TEMPORARY SLOPE DRAIN

NO SCALE

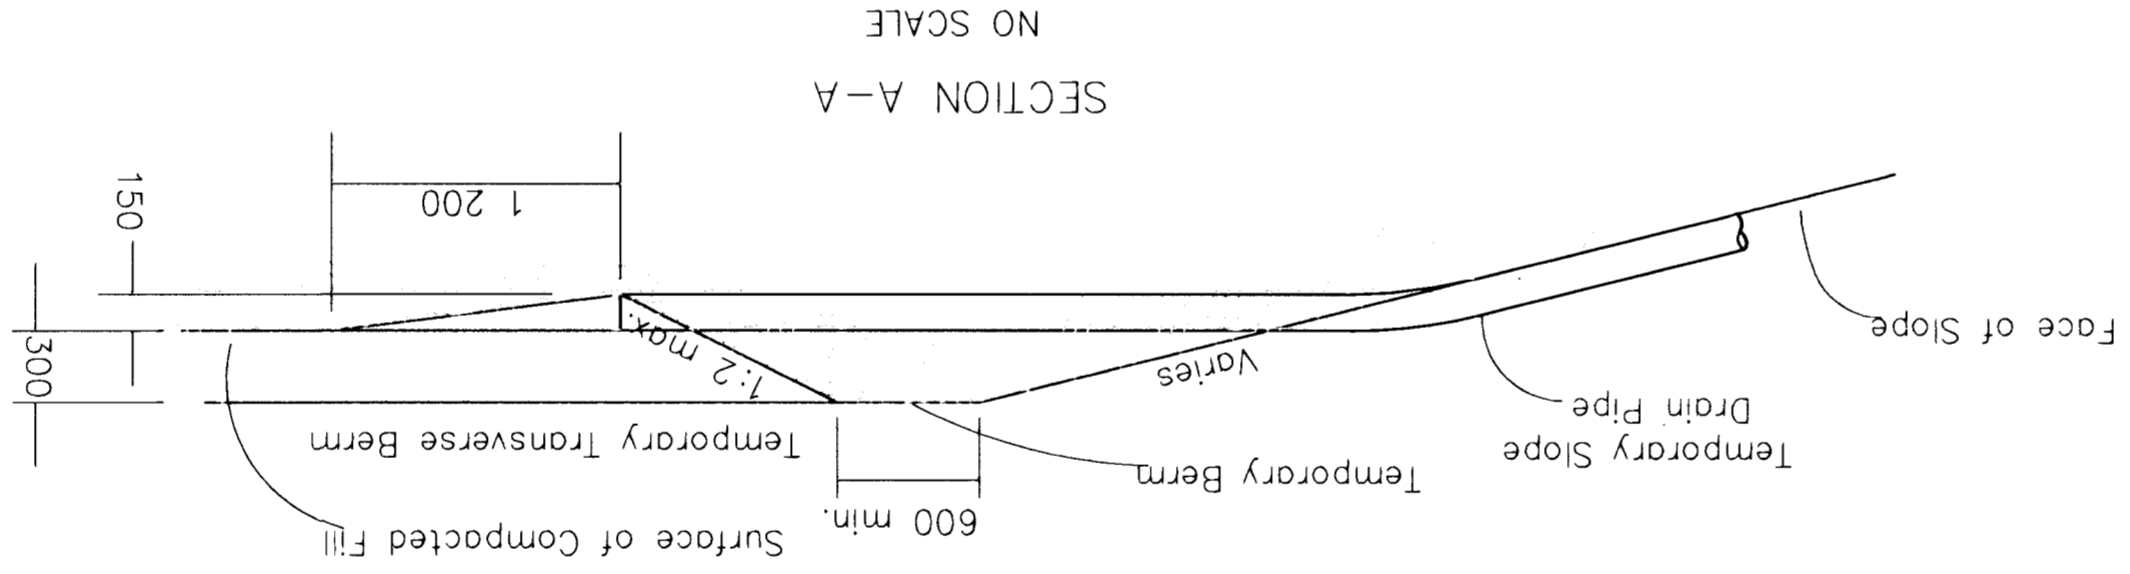


TYPICAL PROFILE OF TEMPORARY BERM

NO SCALE

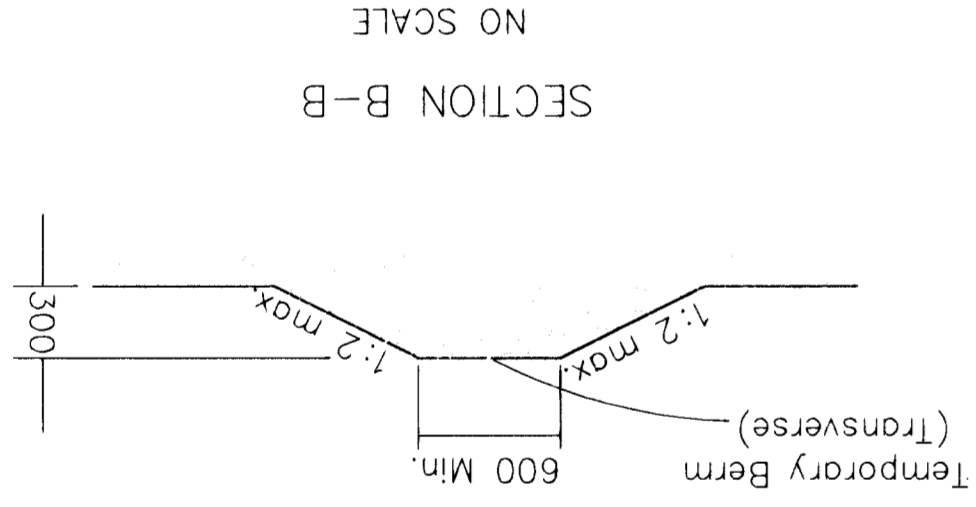

SECTION B-B

NO SCALE

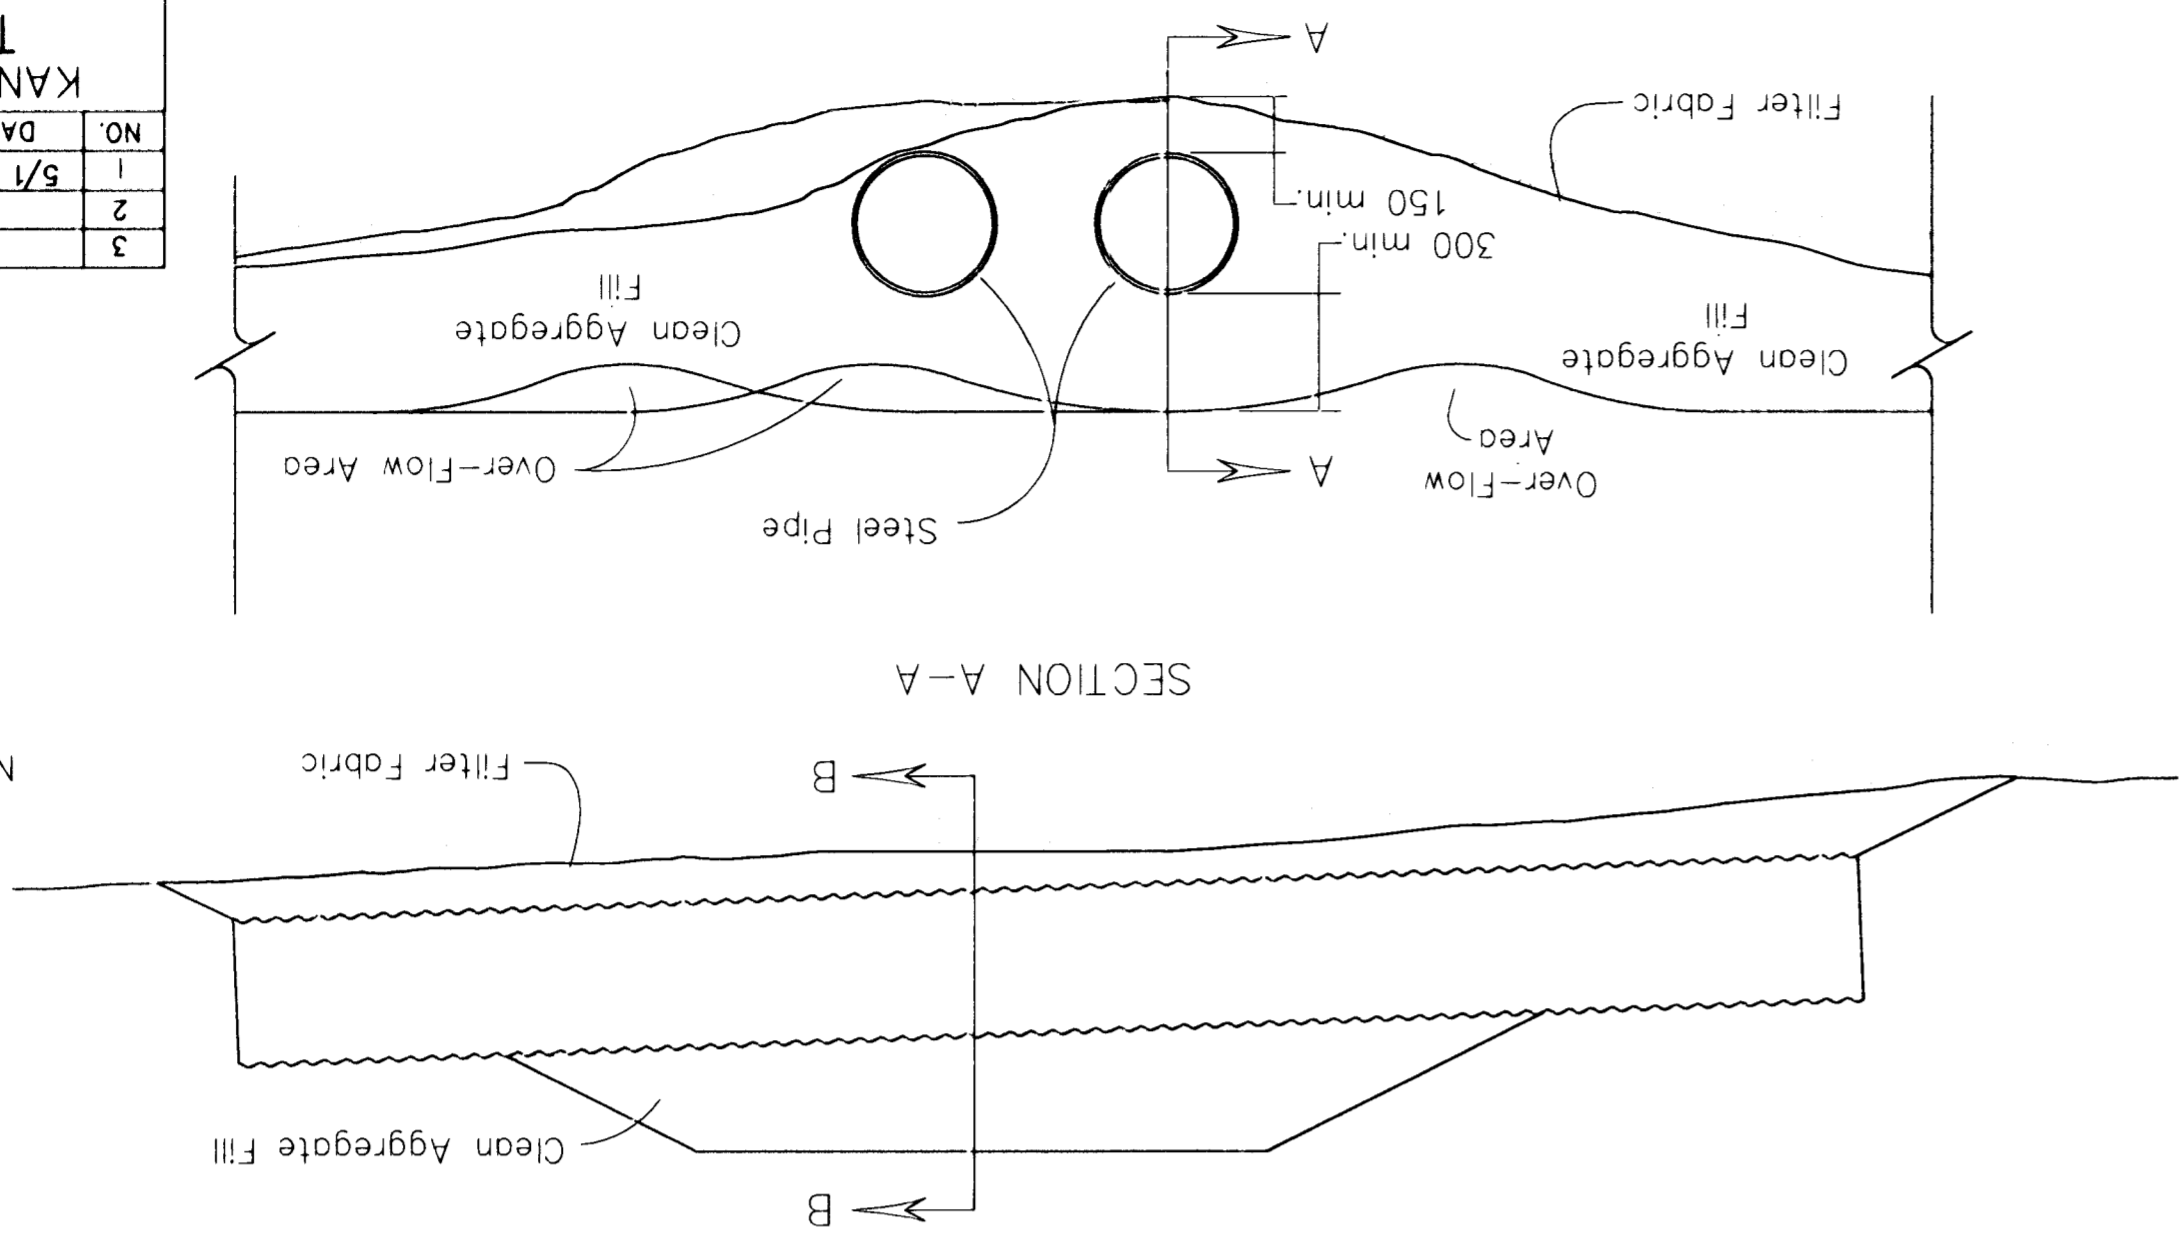

TEMPORARY STREAM CROSSING (AGGREGATE)

NO SCALE

NOTE:
 Quantity, length and diameter
 of steel pipe to be determined
 by design flow calculations.

NO.	DATE	REVISIONS	BY	APP'D
1	5/1/09	Revised Standard	WCL	RDR
2				
3				

DESIGNED: WCL
 CHECKED: WCL
 TRACED: WCL
 F.H.W.A. APPROVAL: 5/20/99
 APP'D: Richard D. Ross
 WCL QUANTITIES
 RDR QUANTITIES
 RDR
 RDR

KANSAS DEPARTMENT OF TRANSPORTATION
 TEMPORARY EROSION AND
 POLLUTION CONTROL
 TEMPORARY SLOPE DRAIN
 TEMPORARY STREAM CROSSING (AGGREGATE)
 TEMP. STREAM CROSS. (ARTC. CONC. BLOCKS)
 LA852B SI

- NOTES:
- 1) Temporary Slope Drain and Temporary Berm may be used on either project foreslopes or project backslopes.
 - 2) Discharge of Slope Drains shall be into stabilized ditch or area, or into Sediment Basin.
 - 3) Pipe shall be secured in place as approved by Engineer.

FHWA REGION STATE	PROJECT NO.	YEAR	SHEET NO.	TOTAL SHEETS
7 KANSAS	B7E-0115-01	1997	45	49