


Note to Engineer & Contractor:
Set walk grade as shown on plans.
Set walk grade +0.7' above top of curb thru drives.



B.M. 99.70 IRON IN THIMBLE, @ WACO & CLARK.
T.B.M. 102.53 "X" CUT, TOP S. CB. CLARK @ W. END RAD. ON S.W. COR.,
CLARK & WICHITA.
BASE LINE ON @ of CLARK.

- GENERAL NOTES:
- 1) CONTRACTOR TO CLEAR, GRADE, & COMPACT FILL IN R/W. AS NECESSARY TO CONSTRUCT PROPOSED 4' SIDEWALK. SIDEWALK TO BE CONSTRUCTED UNDER SEPARATE CONTRACT.
 - 2) ALL DISTANCES BASED ON PLATTED DIMENSIONS, EXCEPT MEASURED DISTANCES DENOTED BY (M.).

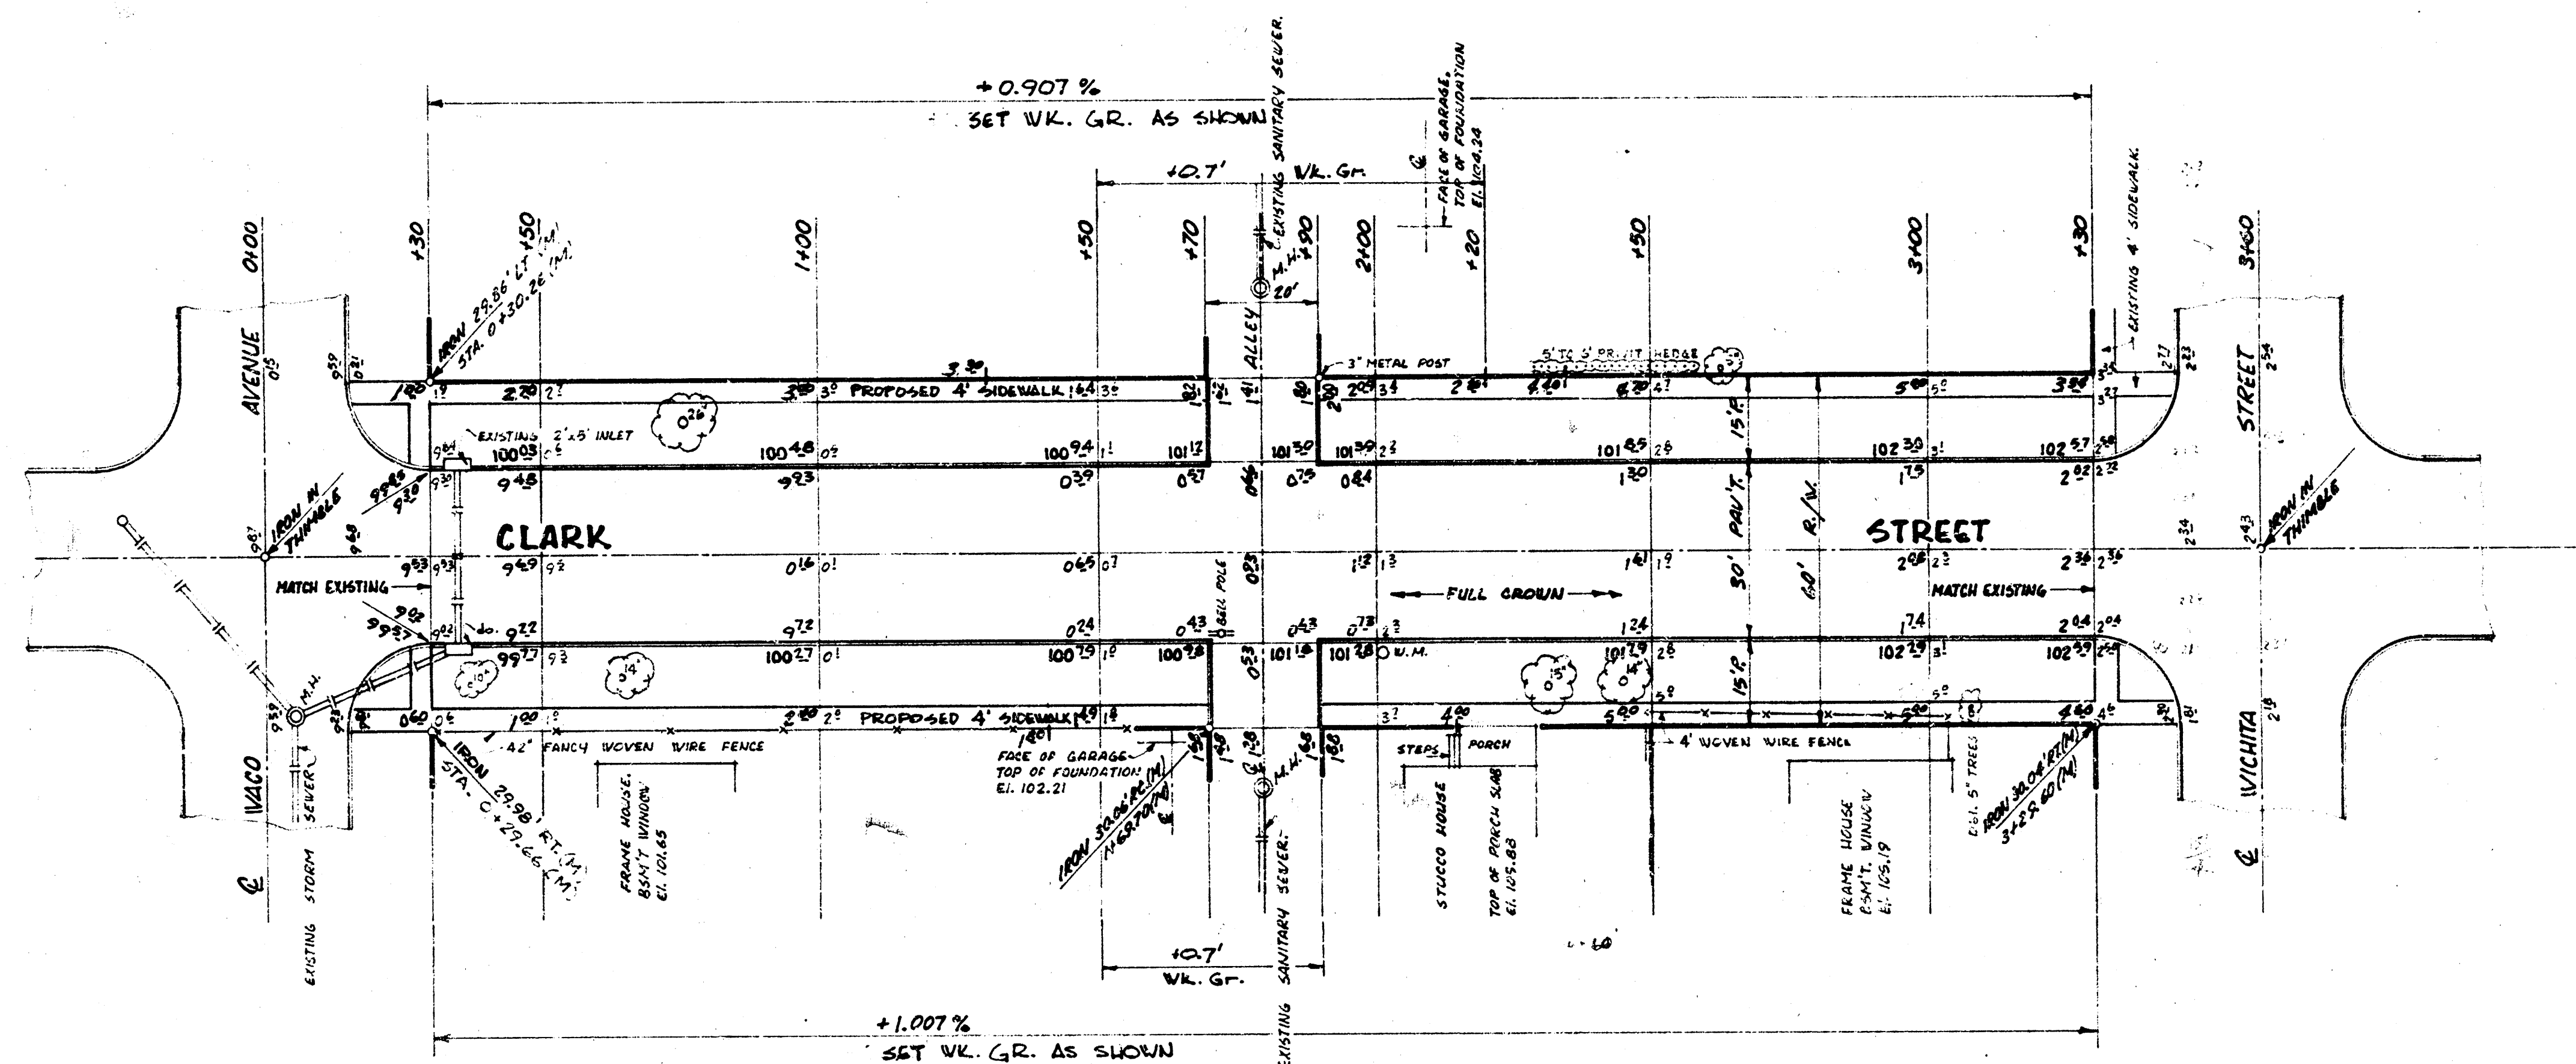

EARTHWORK		COMPACTED FILL	
EXCAVATION		CITY	
CITY	PROPERTY	CITY	PROR
38.7 C.Y.	817.9 C.Y.	12.2 C.Y. S&M.	171.1 C.Y. S&M.
PLUS 10%	3.9		
TOTAL	42.6 C.Y.	448.7 C.Y.	12.2 C.Y. S&M.

CLARK STREET FROM THE EAST LINE OF WACO AVENUE TO THE WEST LINE OF WICHITA STREET.

30' WIDE CONCRETE PAVEMENT, 6" THK., W/ INT. CURB

CITY of WICHITA, KANSAS.

B.E. SMITH, CITY ENGINEER

DATE: MAY, 1969

PROJECT No. CUB-36

SHEET 1 of 2

