



COMPACTED FILL DETAIL
WHERE SIDEWALK IS CONSTRUCTED IN FILL
(See Plan Sheets for Locations)

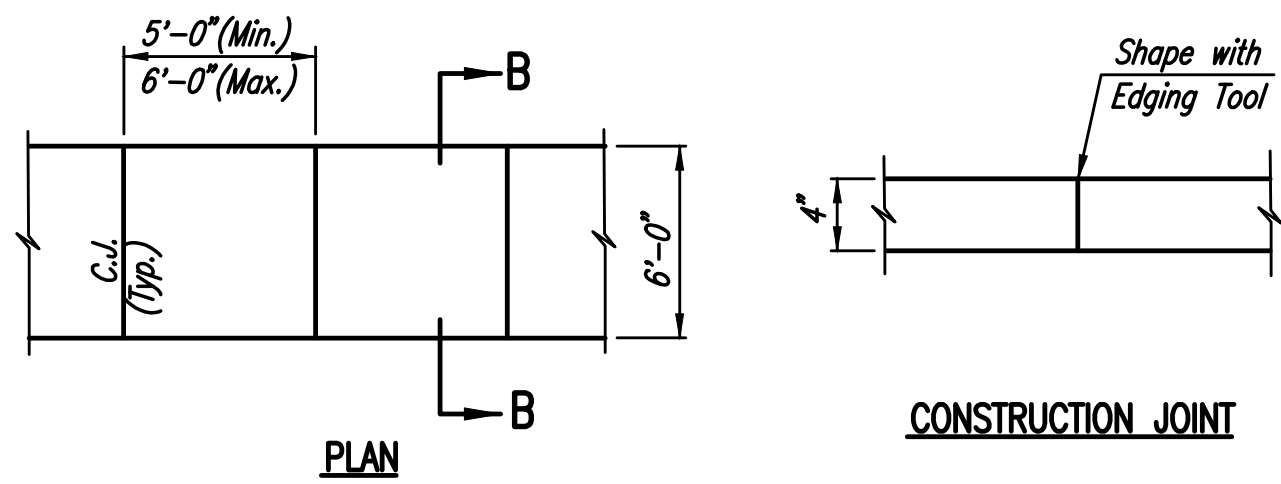

PLAN

CONSTRUCTION JOINT

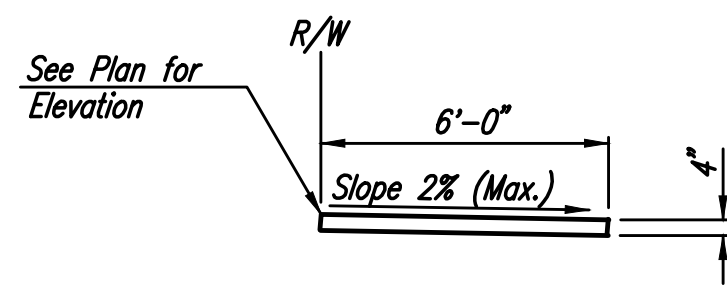

SECTION B-B

CONSTRUCTION JOINT



4" WALK DETAILS

CONSTRUCTION JOINT

Knife 2" deep & Shape with "Vee" Tool

No sawn contraction joints will be allowed

CONSTRUCTION JOINT

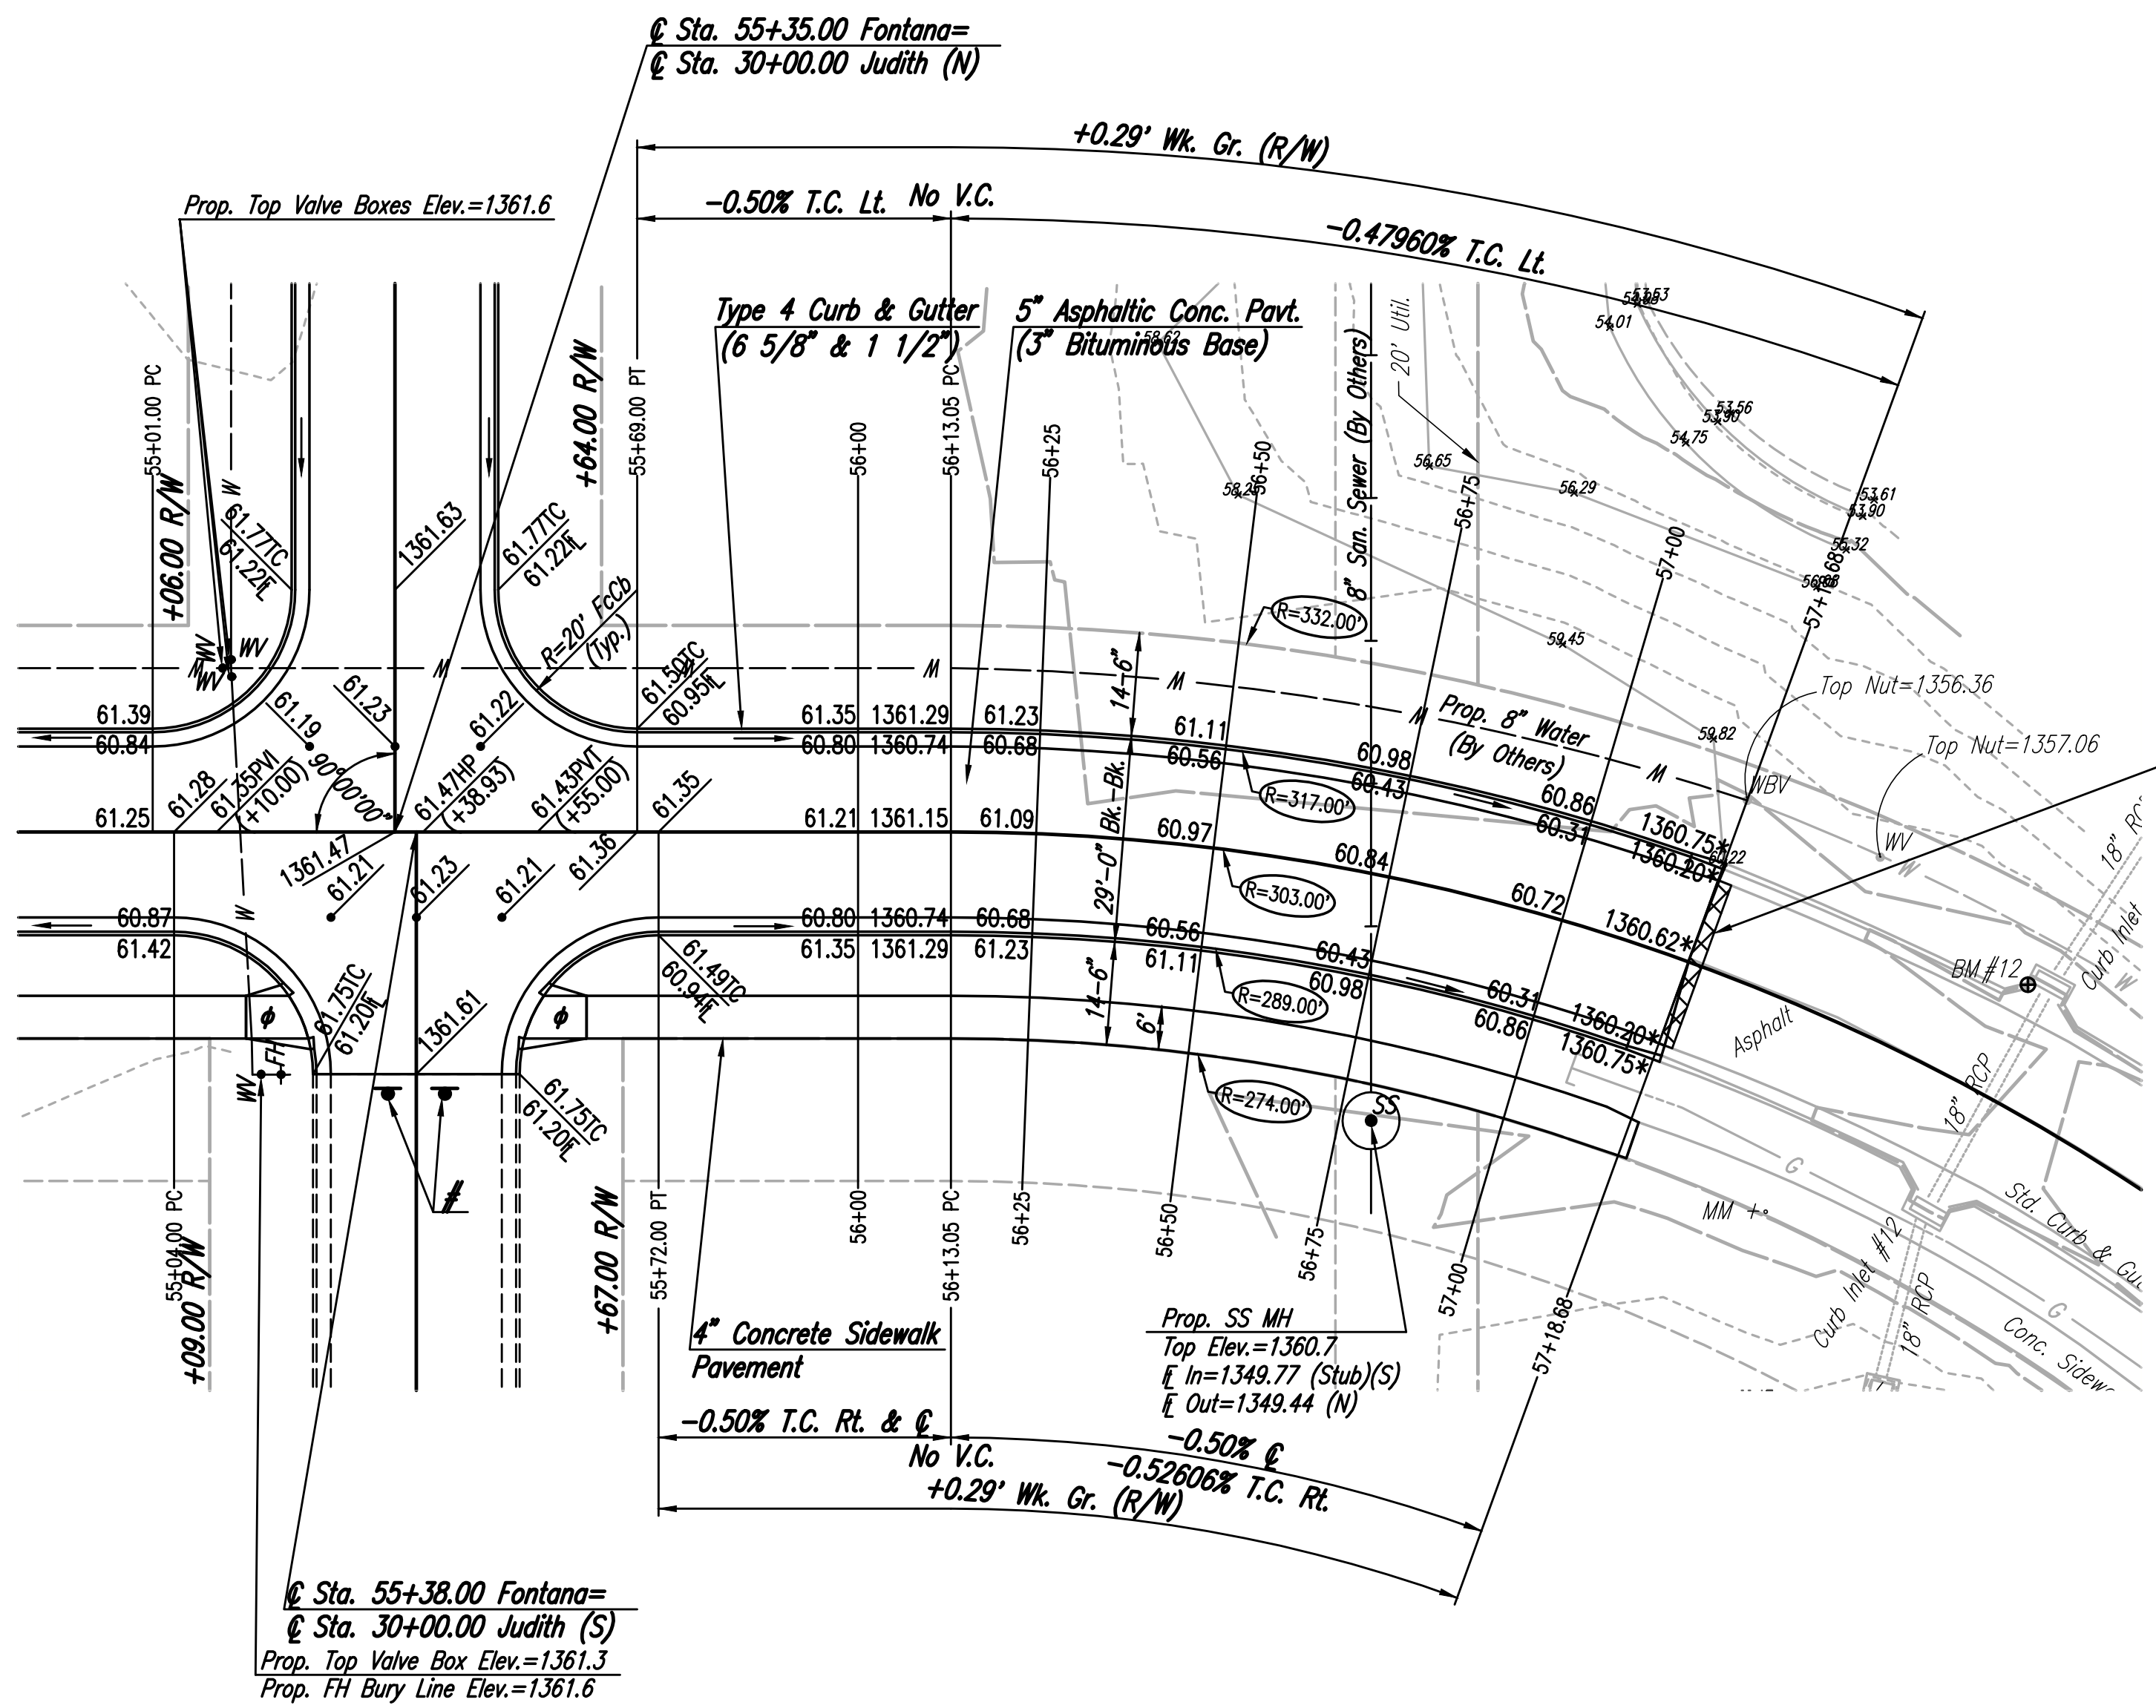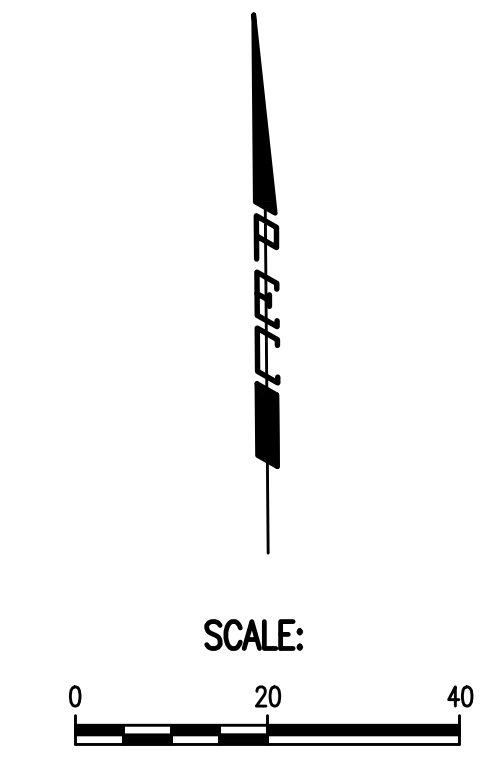

Saw Cut, Remove and Replace Pavement as Necessary to Provide Neat Line. This Work Shall be Subsidiary to "Asphalt Pavement".

Sowed 07-19-2016 4:42:45 PM by BJS
 Plot Scale 1:1 07-20-2016 3:20:16 PM by BJS
 U:\wchita-civil\2015\15631\000\Drawings\15631-00-04C-PAVING PLAN-FONTANA

⊙ CURVE DATA

$A=19^{\circ}58'26''R$ $D=18^{\circ}54'34.2''$ $R=303.00'$ $L=105.63'$ $T=53.36'$ $E=4.66'$
 CURVE DATA BASED ON ⊙ radius $\Delta/2=9^{\circ}59'13''$

⊙ STATION	⊙ ARC LENGTH	FACE CURB LENGTH		CHORD LENGTH		DEFLECTION ANGLE	⊙ TOTAL DEFLECTION
		LEFT CURB	RIGHT CURB	8' OFF LEFT FACE CURB	8' OFF RIGHT FACE CURB		
56+13.05						0°00'00.0"	0°00'00.0"
56+25.00	11.95'	12.50'	11.40'	12.82'	11.08'	01°07'47.4"	01°07'47.4"
56+50.00	25.00'	26.16'	23.84'	26.81'	23.18'	02°21'49.3"	03°29'36.7"
56+75.00	25.00'	26.16'	23.84'	26.81'	23.18'	02°21'49.3"	05°51'26.0"
57+00.00	25.00'	26.16'	23.84'	26.81'	23.18'	02°21'49.3"	08°13'15.3"
57+18.88	18.68'	19.54'	17.82'	20.03'	17.32'	01°45'58.1"	09°59'13.0"
TOTAL	105.63'	110.51'	100.75'				

Defl./ft. = 5.67285 min.

- * Match Existing
- ⊕ Construct Std. Wheelchair Ramp, See Sheet No. 13.
- # Install Type OM4-3 (End of Roadway Marker See Sheet No. 31.)

No.	Revision	By	Date
	FONTANA 5TH-PHASE 1 PAVING AND INCIDENTAL DRAINAGE IMPROVEMENTS PAVING PLAN-FONTANA GARY JANZEN, P.E. - CITY ENGINEER CITY OF WICHITA PROJECT NO. 472-84801		

PROFESSIONAL ENGINEERING CONSULTANTS, P.A.
 303 SOUTH TOPEKA WICHITA, KS 67202
 316-262-2691 www.pec1.com

Designed by BMM	Job No. 31-15631-000	Sht. 04 of 42
Drawn by BJS	Date July 2016	