
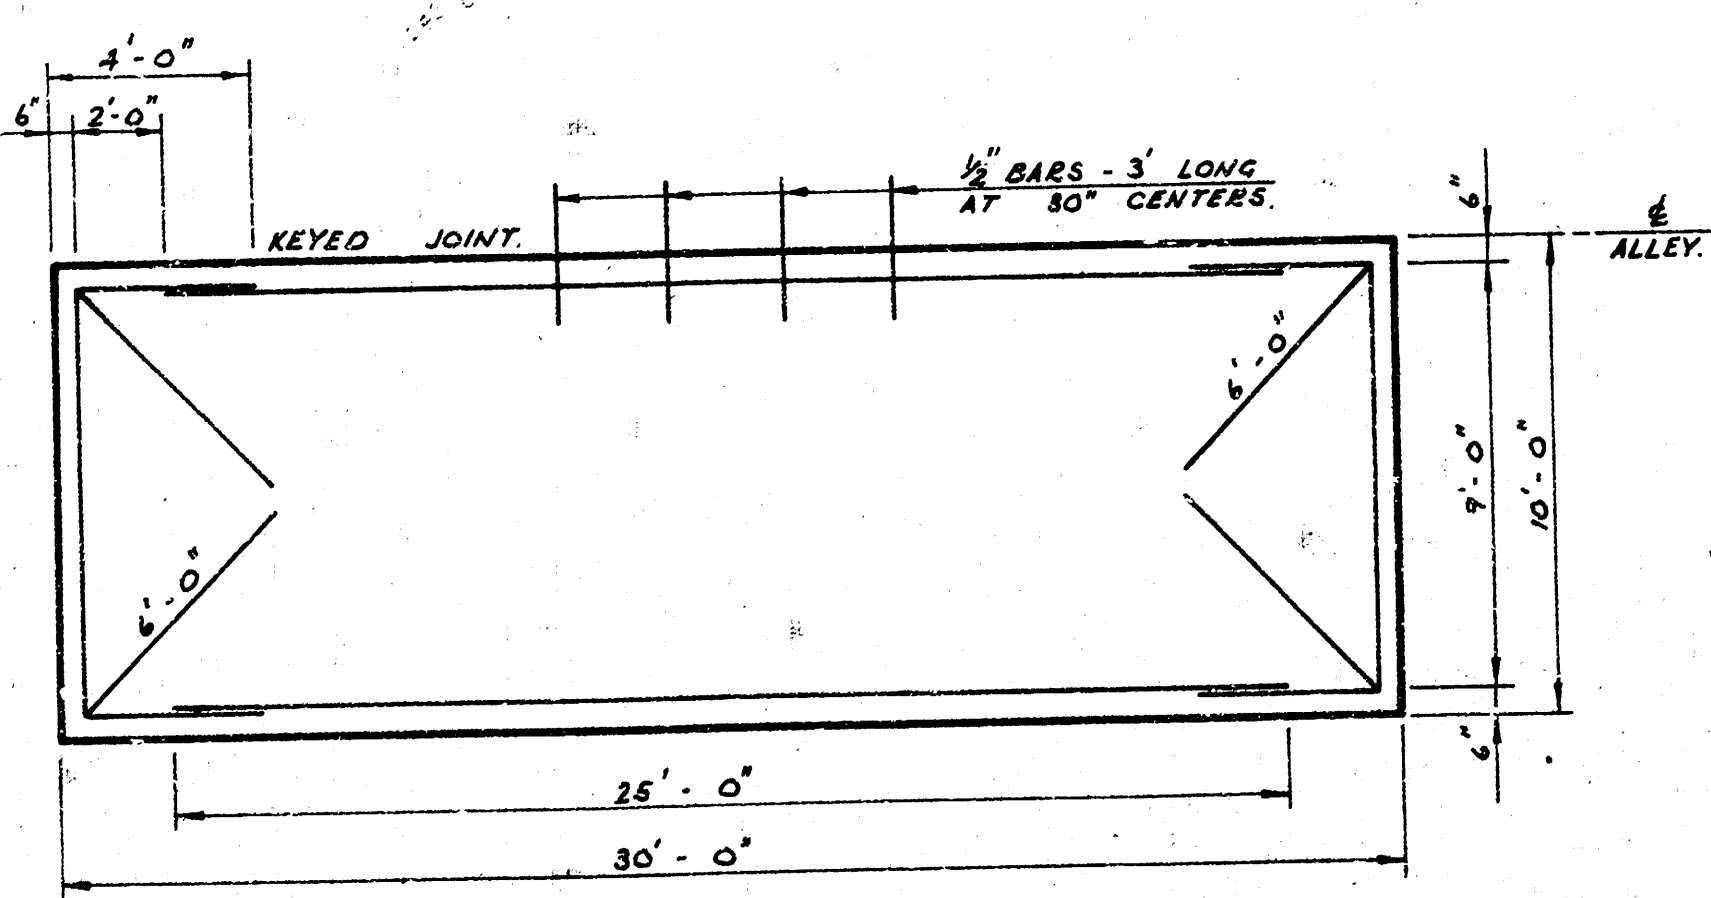



B.M. 101.72 S.W. COR. CONC. PORCH HOUSE N.E.
COR. MARKET & KINKAID.
B.M. 99.60 4" IN GLOBE TOP CURB N. END
RADIUS E.S. MARKET & N.L. KINKAID.

SCALE: 1" = 20'

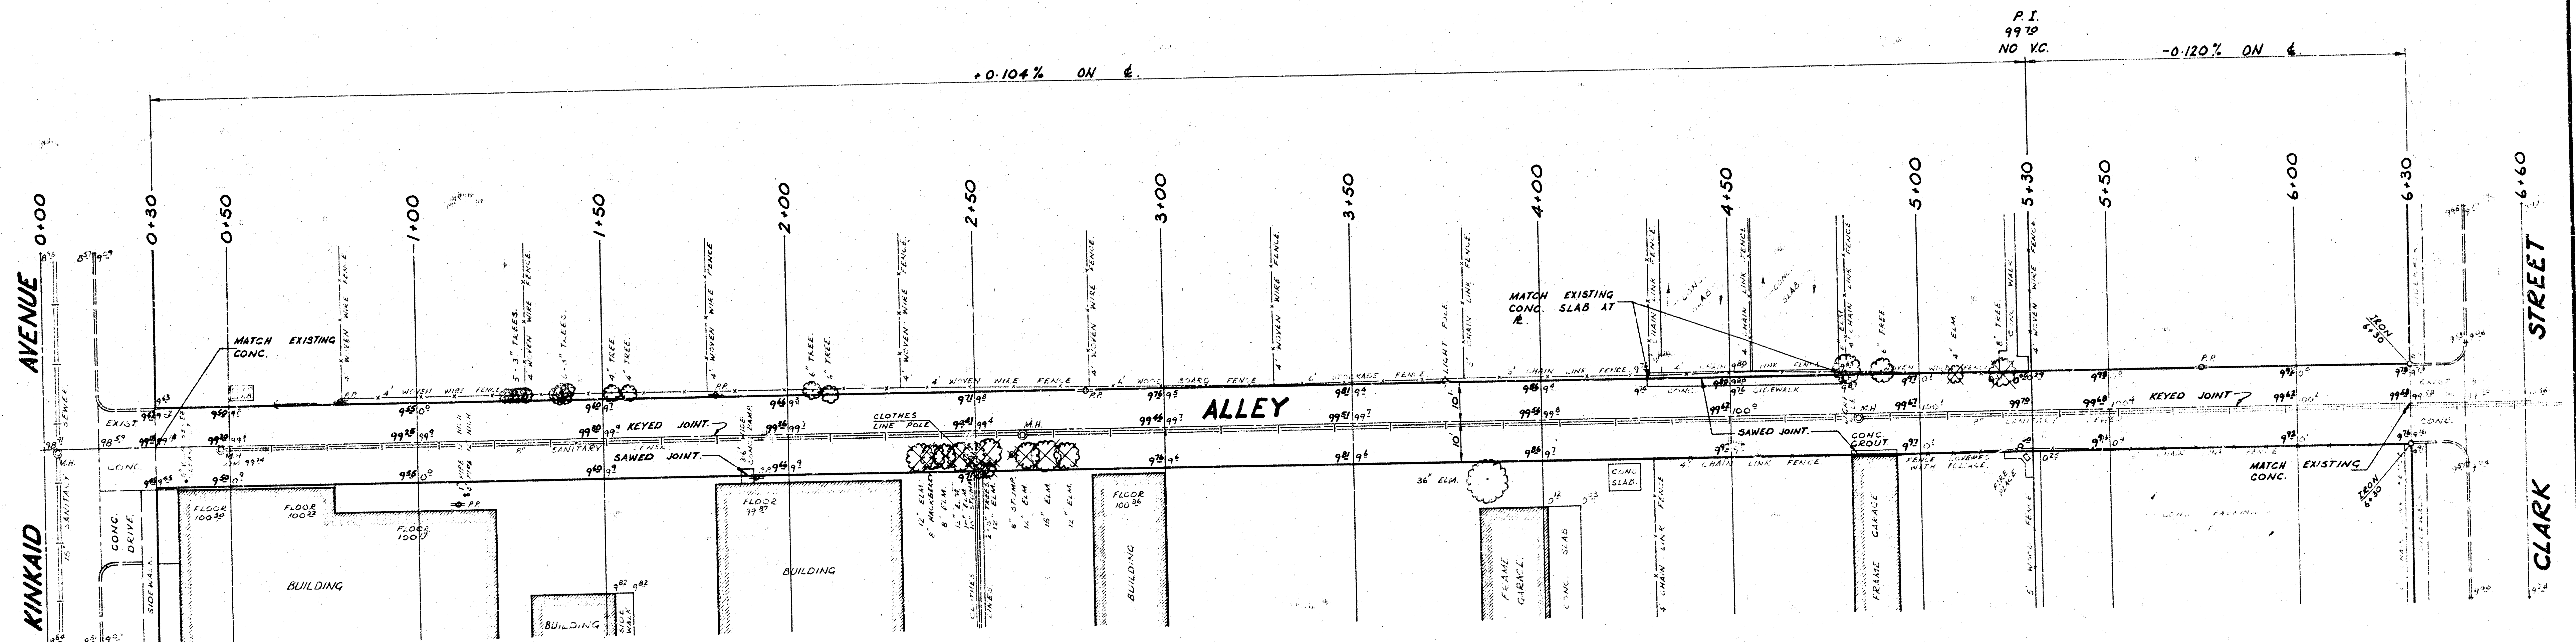

STEEL PATTERN.

ALL REINFORCING STEEL TO BE
#4 BARS EXCEPT DONUT BARS.

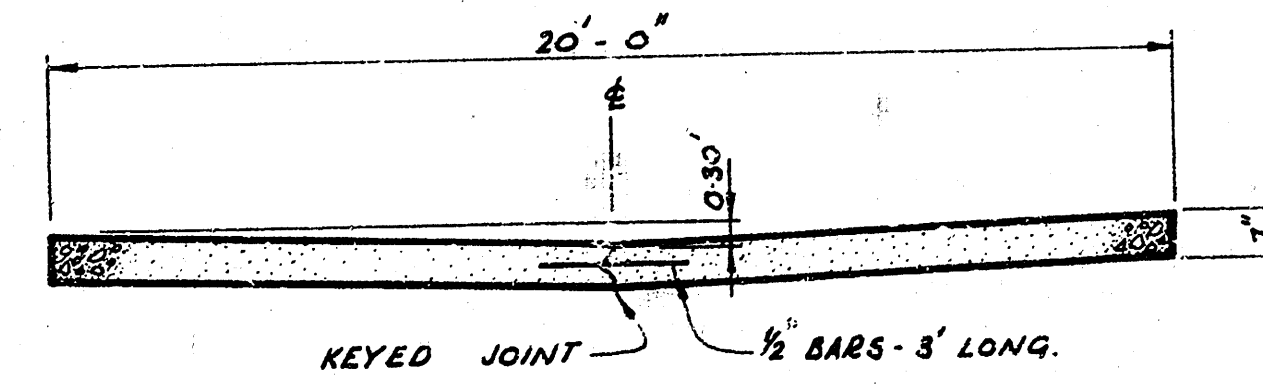

TYPICAL SECTION.

EARTHWORK QUANTITIES.

EXCAVATION = 357.01 CU. YDS.
+ 10% = 35.70 CU. YDS.
TOTAL = 392.71 CU. YDS.

CALCULATED MANIPULATION = 1333.33 SQ. YDS.

⊗ TREE REMOVAL.
□ REMOVAL.

"ALLEY" - BETWEEN MARKET & BROADWAY,
N.L. KINKAID TO S.L. CLARK.
20' - 7" CONCRETE.
CITY OF WICHITA, KANSAS.
R.W. LINN. CITY ENGINEER.
DATE. PROJ. NO. DAKA 575004.