B.M. = 101.72 S.W. cor porch. House N.E. Cor MARKET and KINKAID

N

SCALE 1" = 10'

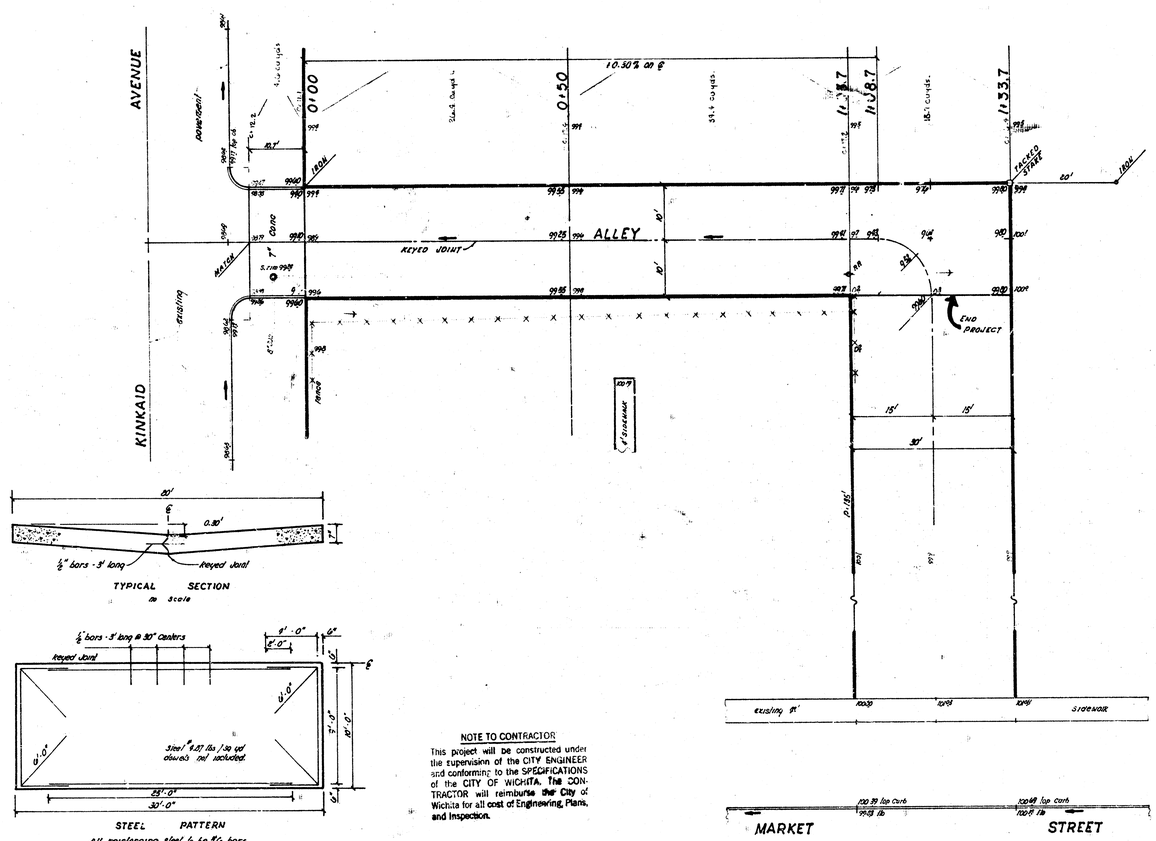

BILL OF MATERIALS		
380.9	Sq yds	7" CONC PAVEMENT
125	lin ft	KEY JOINT
81.4	lin ft	INTEGRAL CURB
1,660	lbs	REIN STEEL
84.1	cu yds	EXCAVATION
58.0	cu yds	Sub Grade Treatment (COMP FILL)

TYPICAL SECTION
as scale

STEEL PATTERN

All reinforcing steel to be #6 bars except dowel bars.

NOTE TO CONTRACTOR

This project will be constructed under the supervision of the CITY ENGINEER and conforming to the SPECIFICATIONS of the CITY OF WICHITA. The CONTRACTOR will reimburse the City of Wichita for all cost of Engineering, Plans, and Inspection.

"ALLEY" BETWEEN BROADWAY & MARKET
S.L. KINKAID AVE to 133.7' So. KINKAID AVE.
20' —— 7" CONCRETE

CITY OF WICHITA, KANSAS

R. W. LINN — CITY ENGINEER

DATE Dec. 1971 — PRIVATE PROJECT