

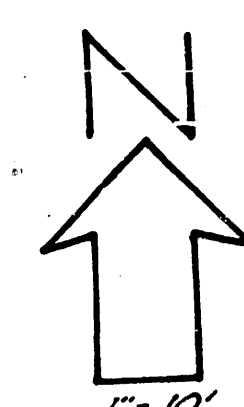


D.M. 131.83 "C" m const. top ch. 35. alley ref. 14' alley
so. of Central "C.S. Chautauqua"

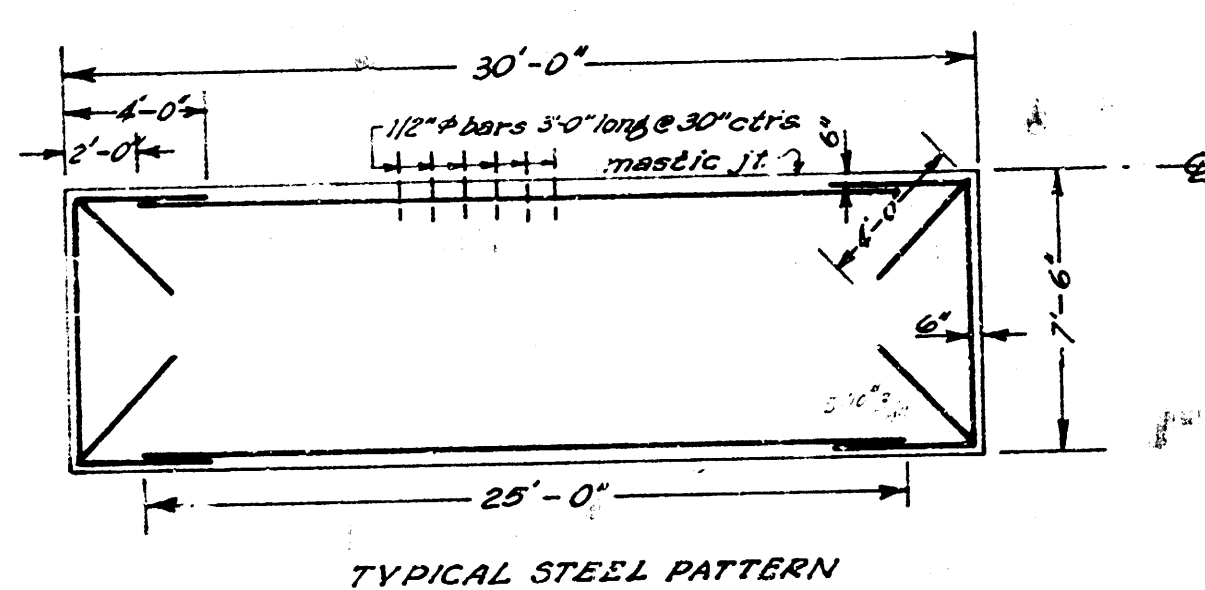

NOTE TO CONTRACTOR
This project will be constructed under the supervision of the CITY ENGINEER and conforming to the SPECIFICATIONS of the CITY OF WICHITA. The CONTRACTOR will reimburse the City of Wichita for all cost of Engineering, Plans, and Inspection.

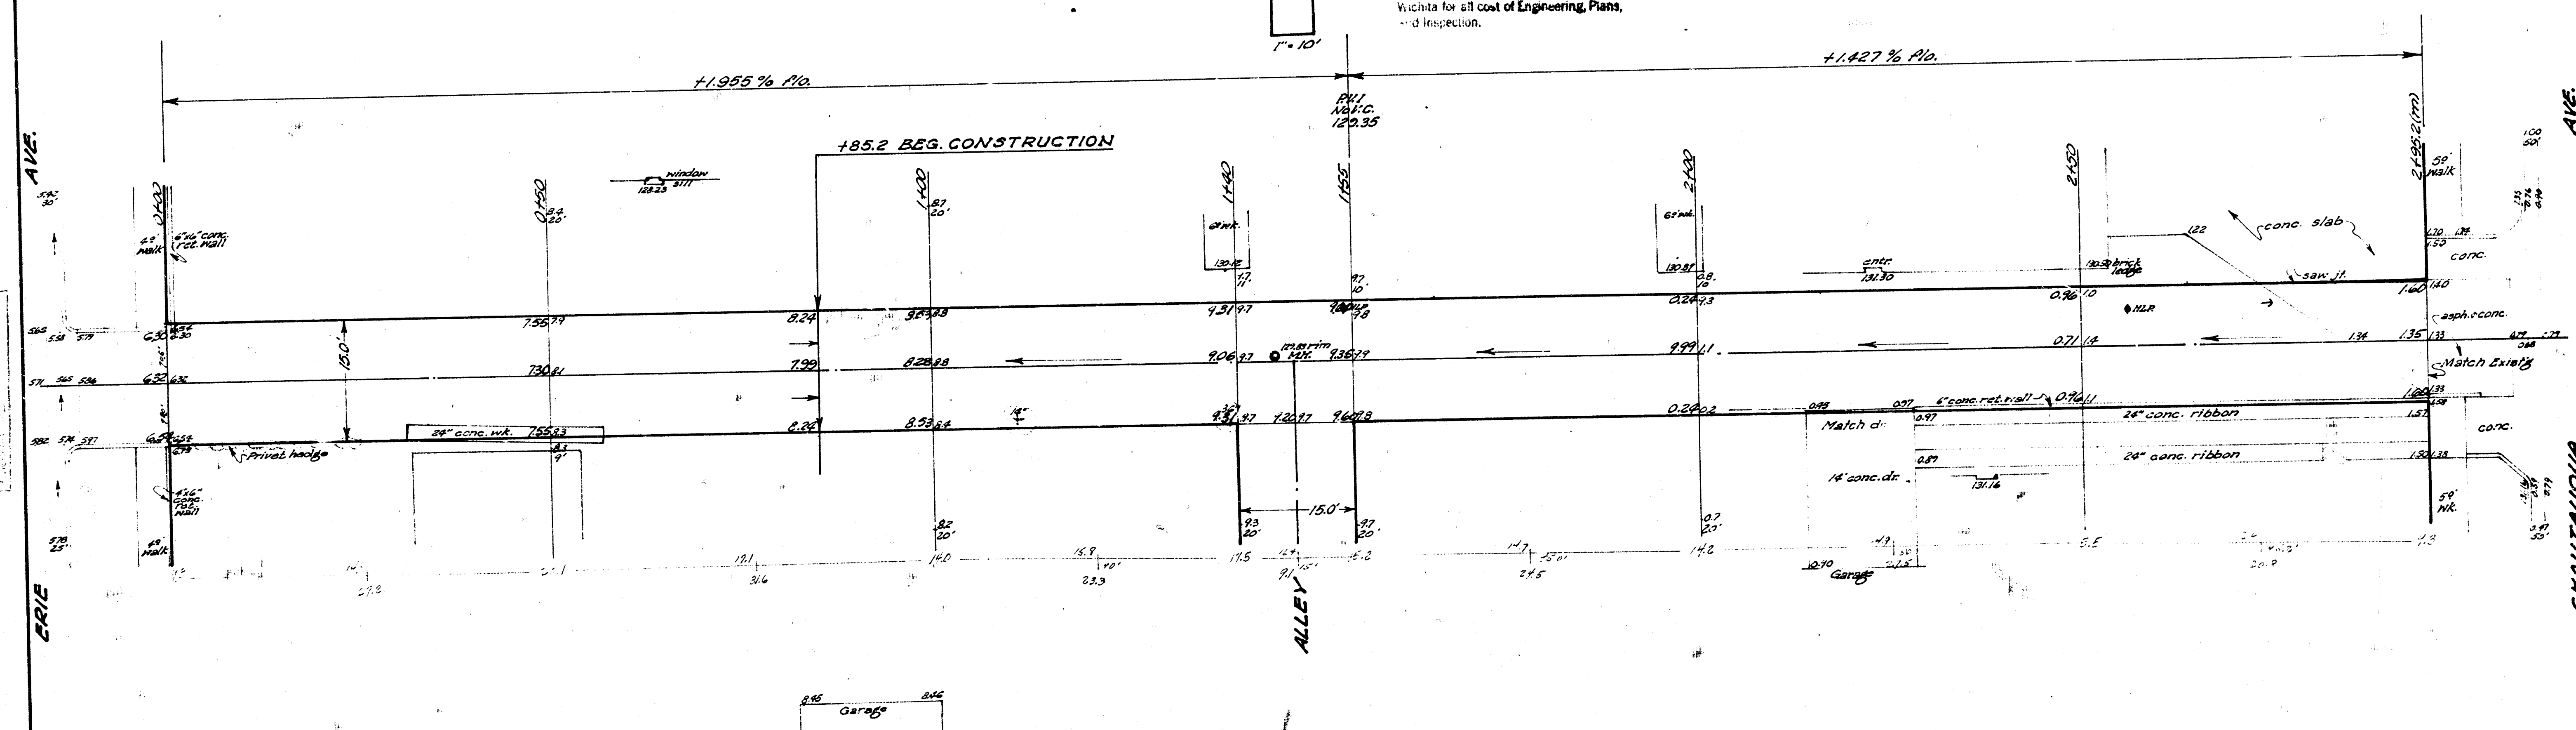

PROJECT QUANTITIES		
350	Sq. yds.	7" Concrete Pavement
115	Cu. yds.	excavation
265	Lbs.	reinforcing steel
210	Lin. Ft.	mastic joint
22	Lin. Ft.	saw joint
36	Sq. yds.	concrete pvt. rem.
14	Sq. Ft.	concrete drive rem.
153	Lin. Ft.	conc. ret. wall rem.
2		Large Trees rem.

ALLEY SO. OF CENTRAL
S.L. Erie Ave. to W.L. Chautauqua Ave.
15'-7" Concrete
City of Wichita, Kansas
B.E. Smith
Date City Engineer
(Private Job)