

Surveyed by
Plan J.L.A.
Checked by
S. J. H.

B.M. 116.20 Std. 23.5' S. & 37.5' E.
Thimble at Broadway & 13th St.

B.M. 118.16 R.R. Spike in p.pole on E.L. Alley
between Broadway & Topeka, 21' S. of & 14th St.


NOTE:
Contractor to Excavate & Pour
Concrete Pavement 6" Extra Width
Under Existing Walk West Side Alley
(See Detail) This Work to be Incidental
To Price Bid for Sq. Yds. Conc. Pavement.

Scale: 1" = 20'

Sidewalk removed to be
replaced with 6" walk.


DETAIL OF WALK Sta. 0+08 to 1+56.7 (L.R.)
Scale: 1/2" = 1'

END PAVEMENT
3+66

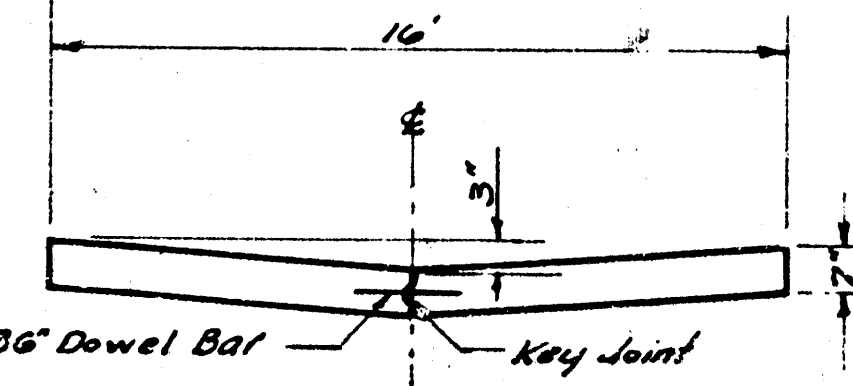

TYPICAL SECTION
No Scale:

NOTE: All steel to be #6 bars
unless otherwise noted.

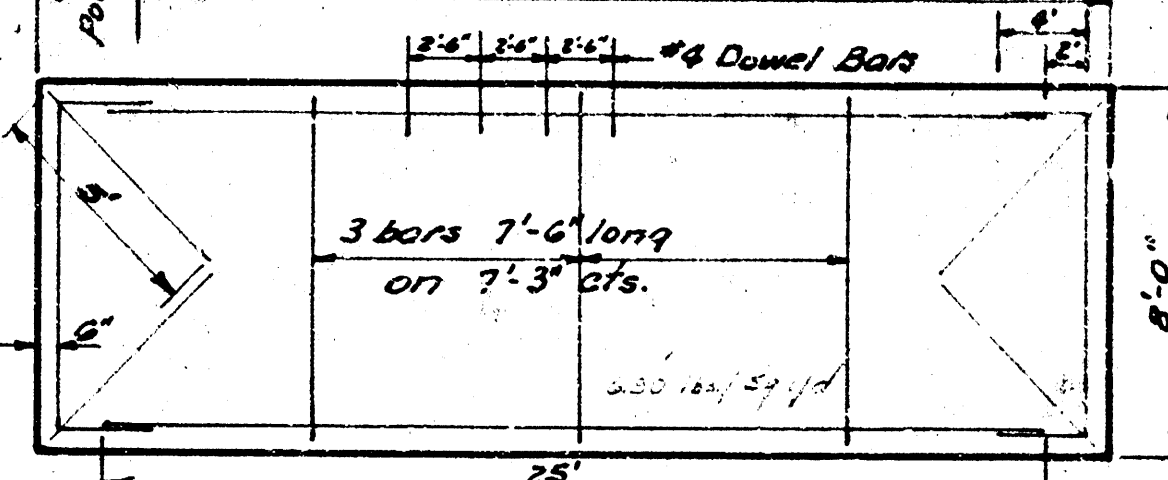

STEEL PATTERN
No Scale:

EXCAVATION		
PROPERTY		CITY
±10 ft.	255 Cu. Yds.	5 Cu. Yds.
26 "	" "	" "
Totals	281 Cu. Yds.	5 Cu. Yds.

ALLEY between BROADWAY
and TOPEKA - N.L. 14' Sx to
N.L. Lots 1 & 2 Dubois and
CORN'S ADDITION
16'-7" CONCRETE
B.E. SMITH CITY ENGINEER
CITY OF WICHITA KANSAS
Date: Dec. 12, 1922
Project No. 619-53

