


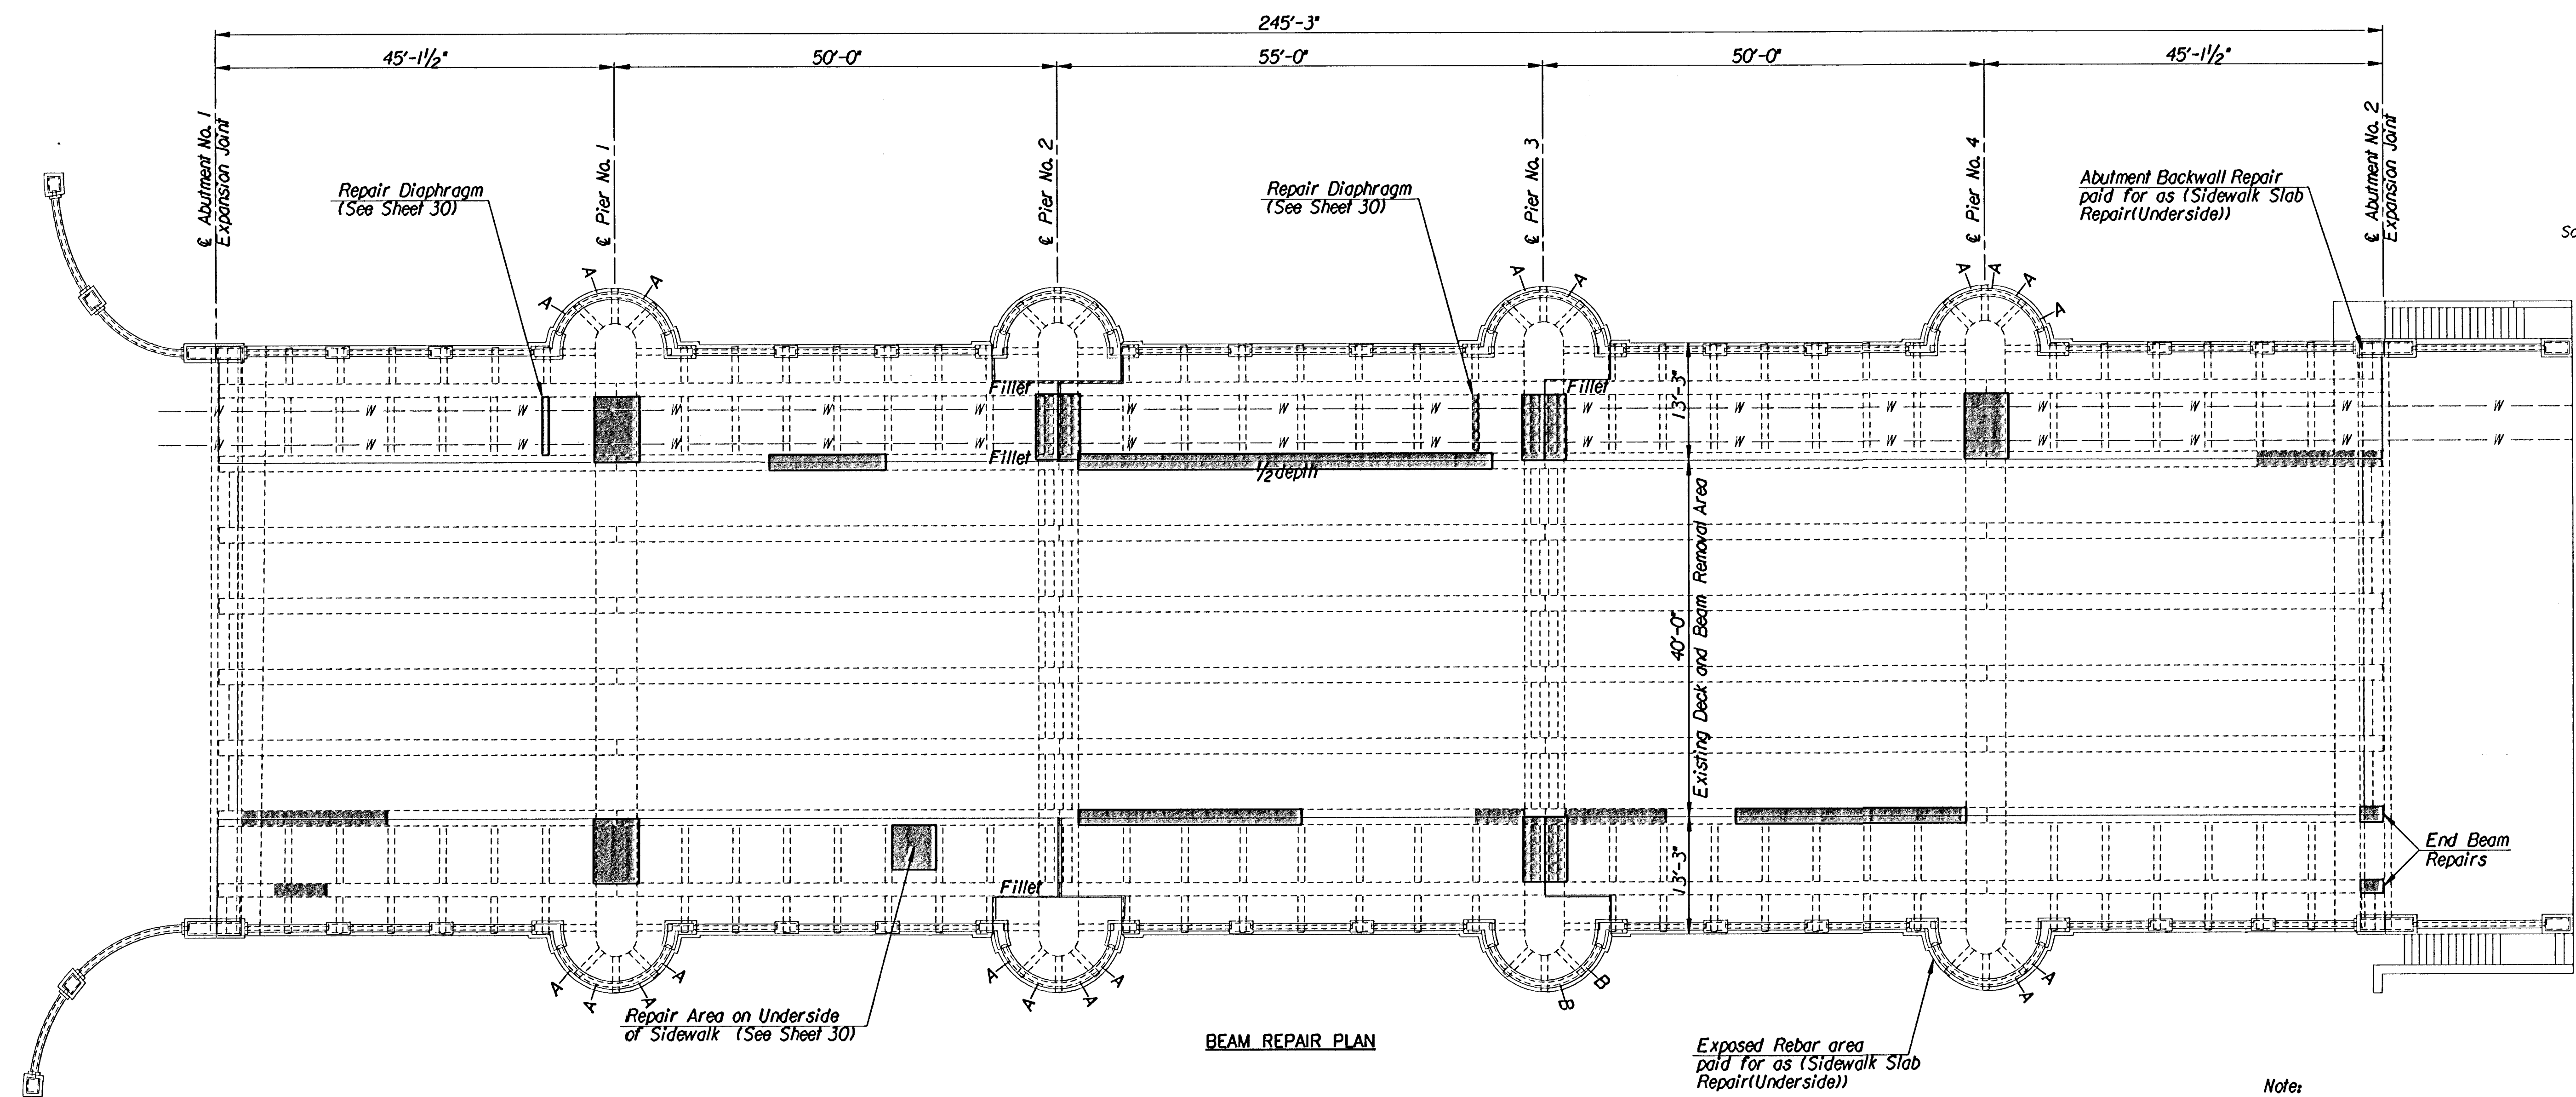

BEAM REPAIR PLAN

- Note:
1. For Concrete Repair Procedures See Sheet No. 30.
 2. Fillets to be repaired considered "Concrete Beam Repair" measured horizontally to face of pier.

BRIDGE RAIL REPAIR	
Type	No. Locations
A	19
B	2

Note: See Sheet 30 for repair details.

- Legend
- Spalled and Deteriorated Sidewalk Floor Beam and Slab Areas to be Repaired.
 - A Type A Rail Repair (See Sht. No. 31)
 - B Type B Rail Repair (See Sht. No. 31)
 - Fillet Fillets to be repaired

No.		Revisions		By	Date
CITY OF WICHITA, KANSAS JAMES L. ARMOUR, P.E. - ACTING CITY ENGINEER MURDOCK BRIDGE OVER LITTLE ARKANSAS RIVER CONCRETE BEAM AND SLAB REPAIR CITY OF WICHITA PROJECT NO. 472-83895					
Professional Engineering Consultants, P.A. 303 S. TOPEKA • WICHITA, KANSAS 67202 316-262-2691 • FAX 316-262-3003					
Designed by	R.A.S.	Checked by	R.A.S.		
Drawn by	R.A.S./W.L.L.	Date	July 2003	Job No.	96940-2

usr/ustn/dgn/1996/96940/002/officecheck/beamtr.r.dgn
 drawn by : ras/wll
 plotted by : RAS 3-27-2004