
B. M. #153 "R" in Ritchie chk. app. top N. E. cor. N. cb N. E. cor. Waco Ave. & 8th St.


NOTE TO CONTRACTOR

This project will be constructed under the supervision of the CITY ENGINEER and conforming to the SPECIFICATIONS of the CITY OF WICHITA. The CONTRACTOR will reimburse the City of Wichita for all cost of Engineering, Plans and Inspection.


1" = 10'

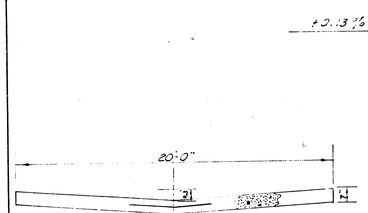

TYPICAL SECTION
(EXCEPTION AT WARPED SECTIONS)
No Scale

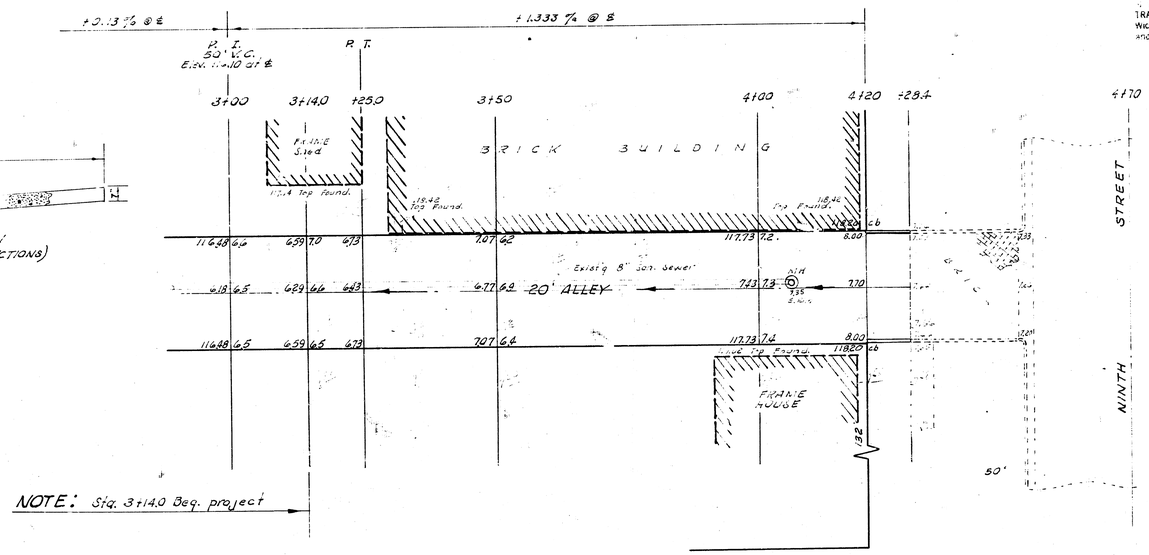

NOTE: Sta. 3+14.0 Beg. project

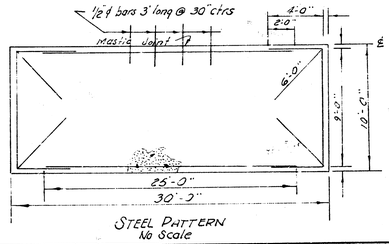

STEEL PATTERN
No Scale



ESTIMATED QUANTITIES	
254.0	Sq. Yds 7" Conc.
1330.0	Lbs. Reinf. Steel
33.4	Cu. Yds Excavation
16.8	Lin. ft. Intg. cb
6.0	Cu. Yds Fill Comp.
114.4	Lin. ft. Mastic Joint

IOWA R. PARKISON
REGISTERED
531
KANSAS

ALLEY

BETW. WACO AVE. & NINTH ST.
SL 9TH TO 106 S. OF SL 9TH ST
7" CONC. - 20'
CITY OF WICHITA, KANSAS
B. E. SMITH CITY ENGINEER
DEC. 1960, PRIVATE CONTRACT