



RAILROAD CROSSING DETAIL

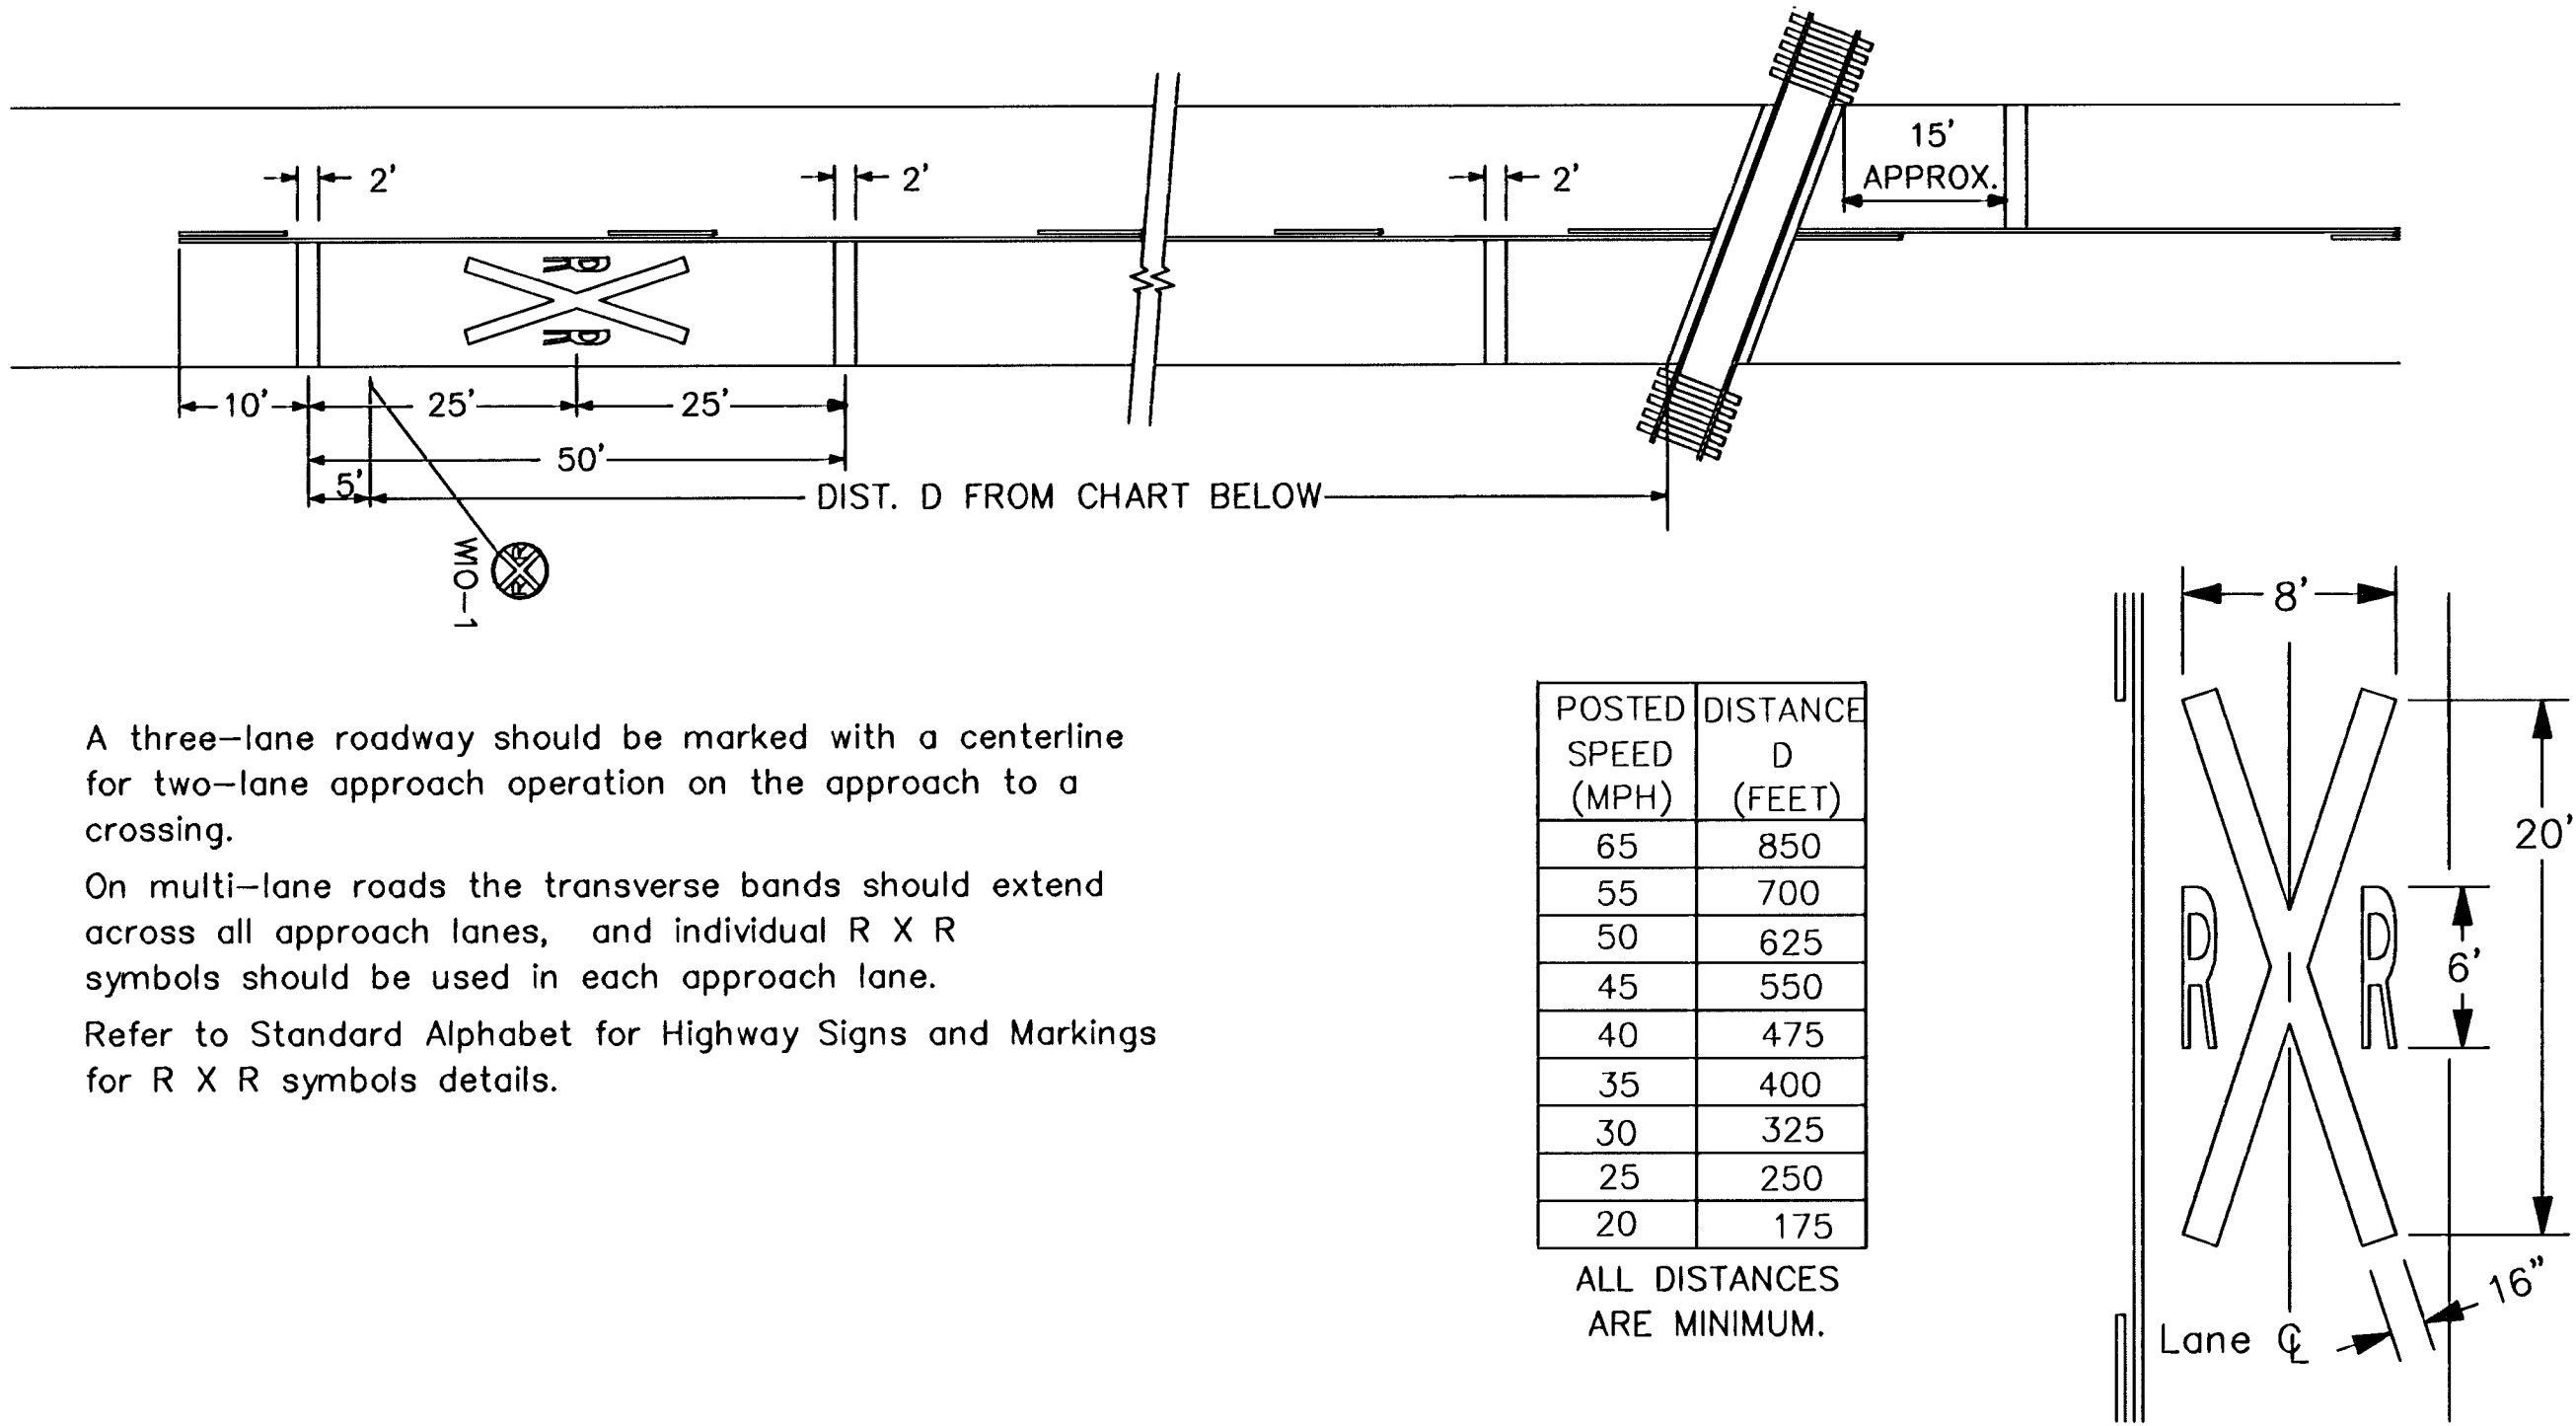

TYPICAL
APPROACH TAPER DETAIL


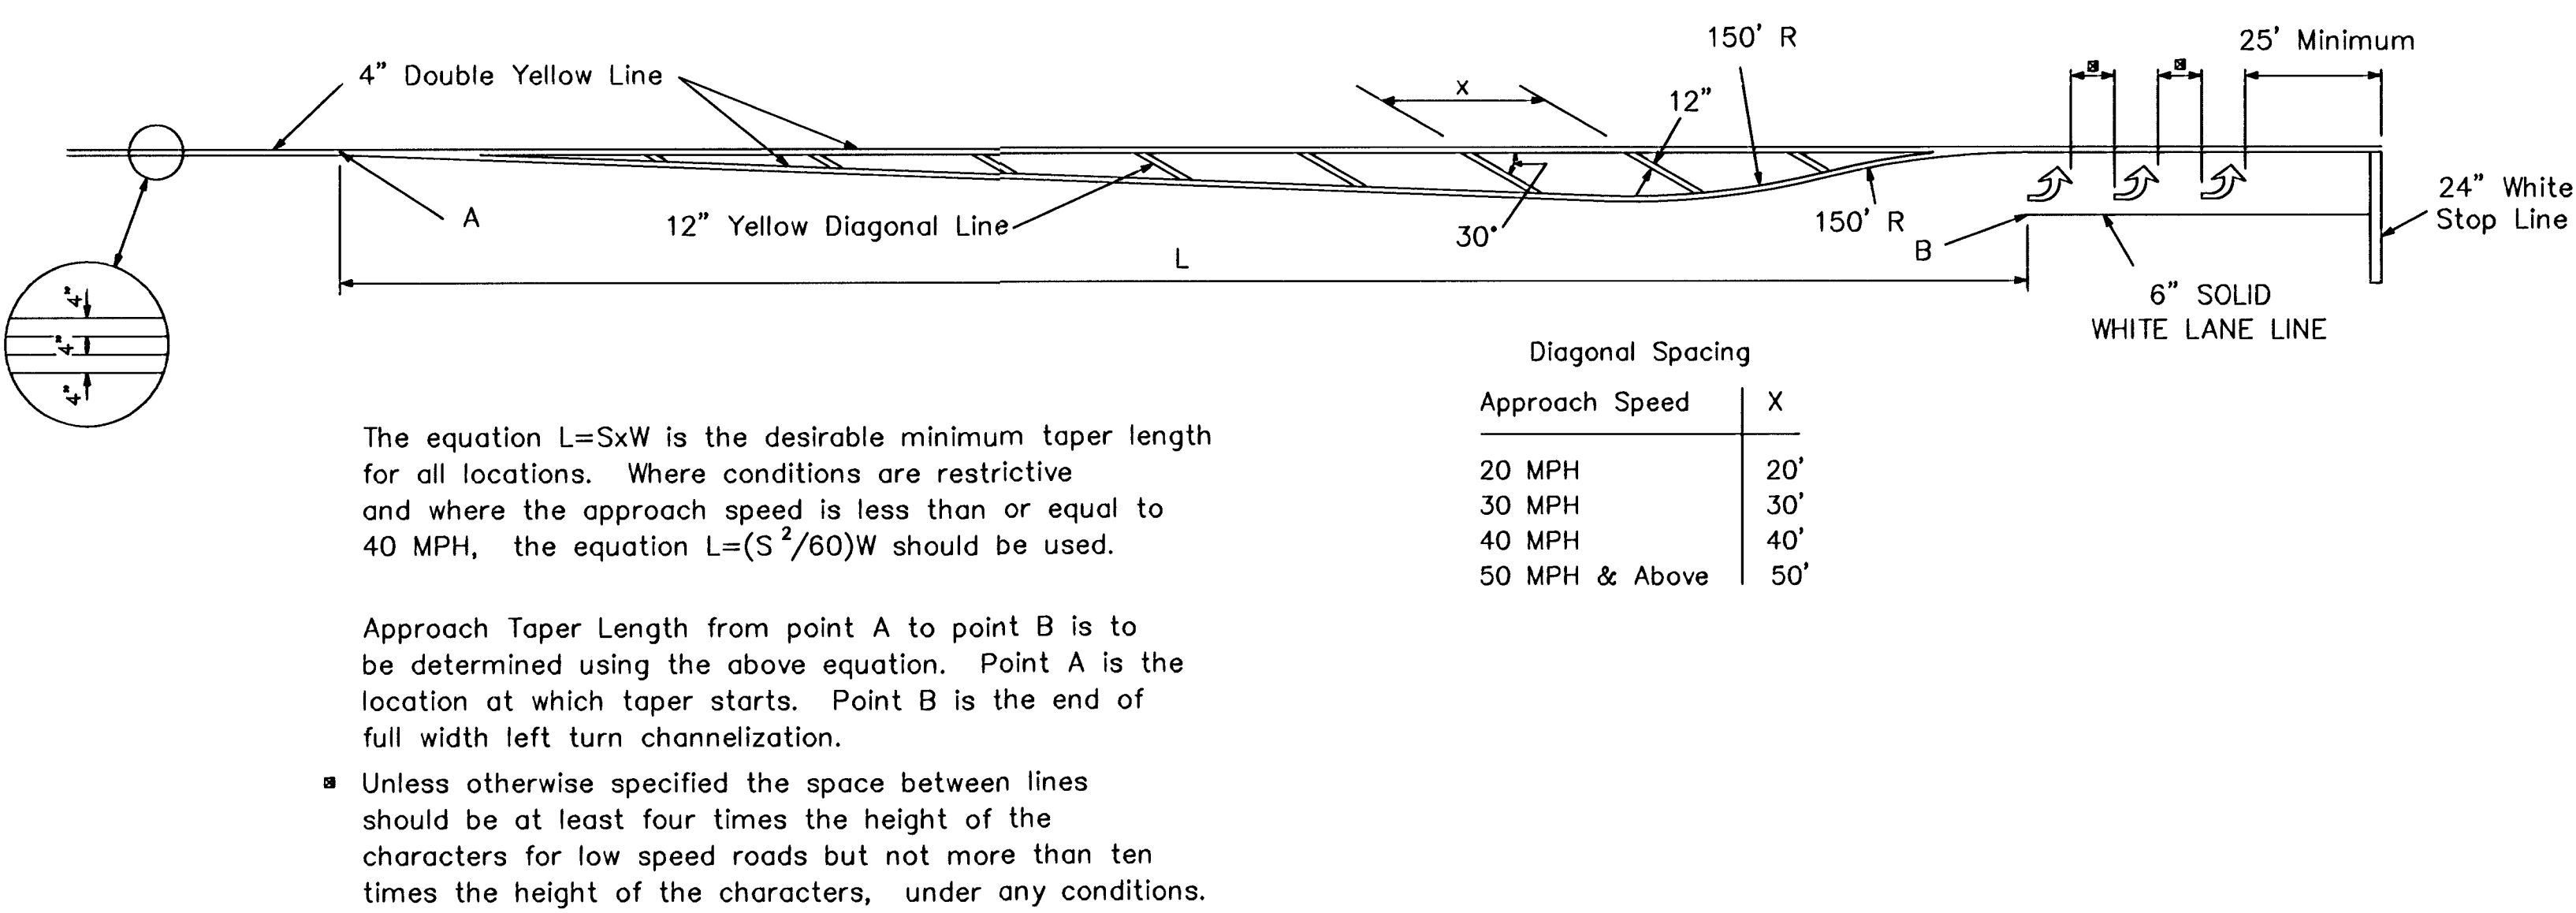


TYPICAL CROSSWALKS

TYPE I: Crosswalk lines shall be 12" solid white lines. They shall be spaced a minimum of 6' apart (from inside edge to inside edge).

TYPE II: These lines should be solid white 24" wide placed parallel to the direction of traffic flow. The line placement is determined by lane line, center line, and wheel path in such a manner as to minimize traffic wear. The crosswalk width should be not less than 8'. The transverse crosswalk lines may be added.

When required, Stop lines shall be installed a minimum of 4' from crosswalks.

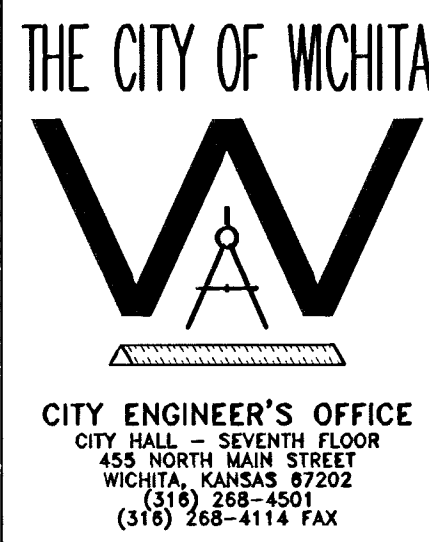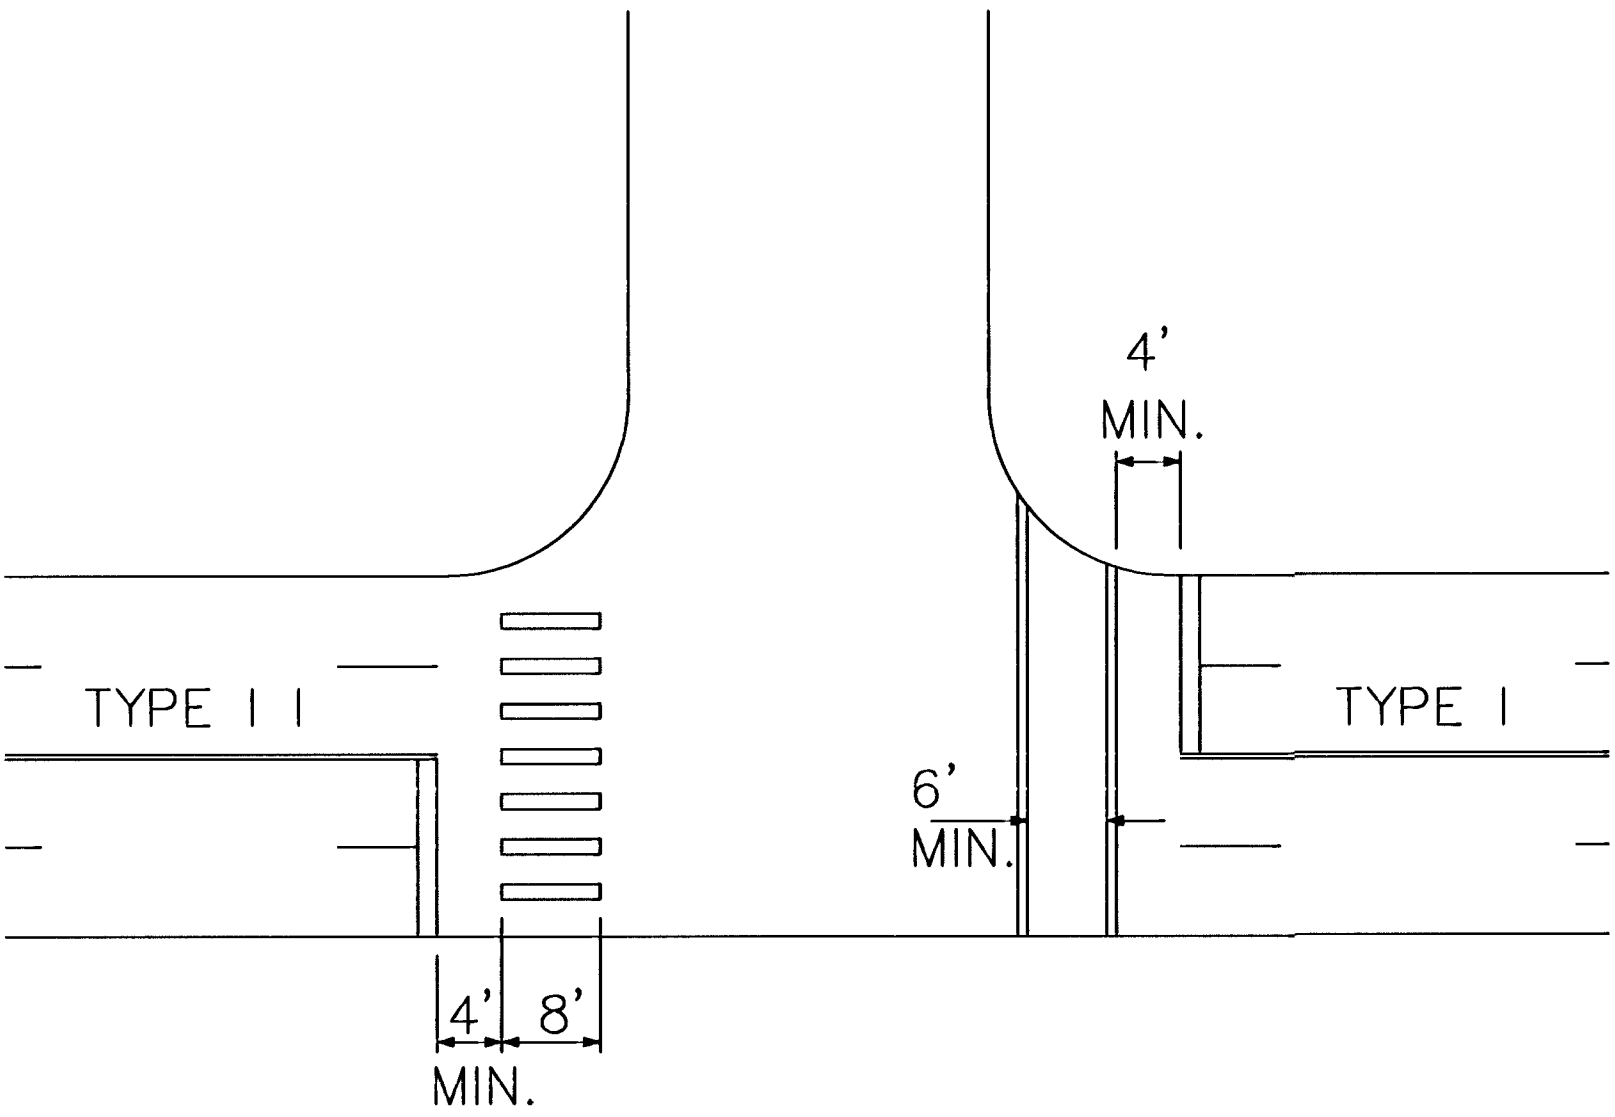

CITY ENGINEER'S OFFICE
CITY HALL - SEVENTH FLOOR
455 NORTH MAIN STREET
WICHITA, KANSAS 67202
(316) 268-4501
(316) 268-4114 FAX

MISCELLANEOUS
PAVEMENT MARKING
DETAIL SHEET

M. E. LINDEBAK P.E. - CITY ENGINEER

PROJECT NUMBER 472-83713/83693 OCA # 768788 / 765792

DATE NOV 93 SHEET 6 OF 14