

1

2

3

4




5

D


C

B

A

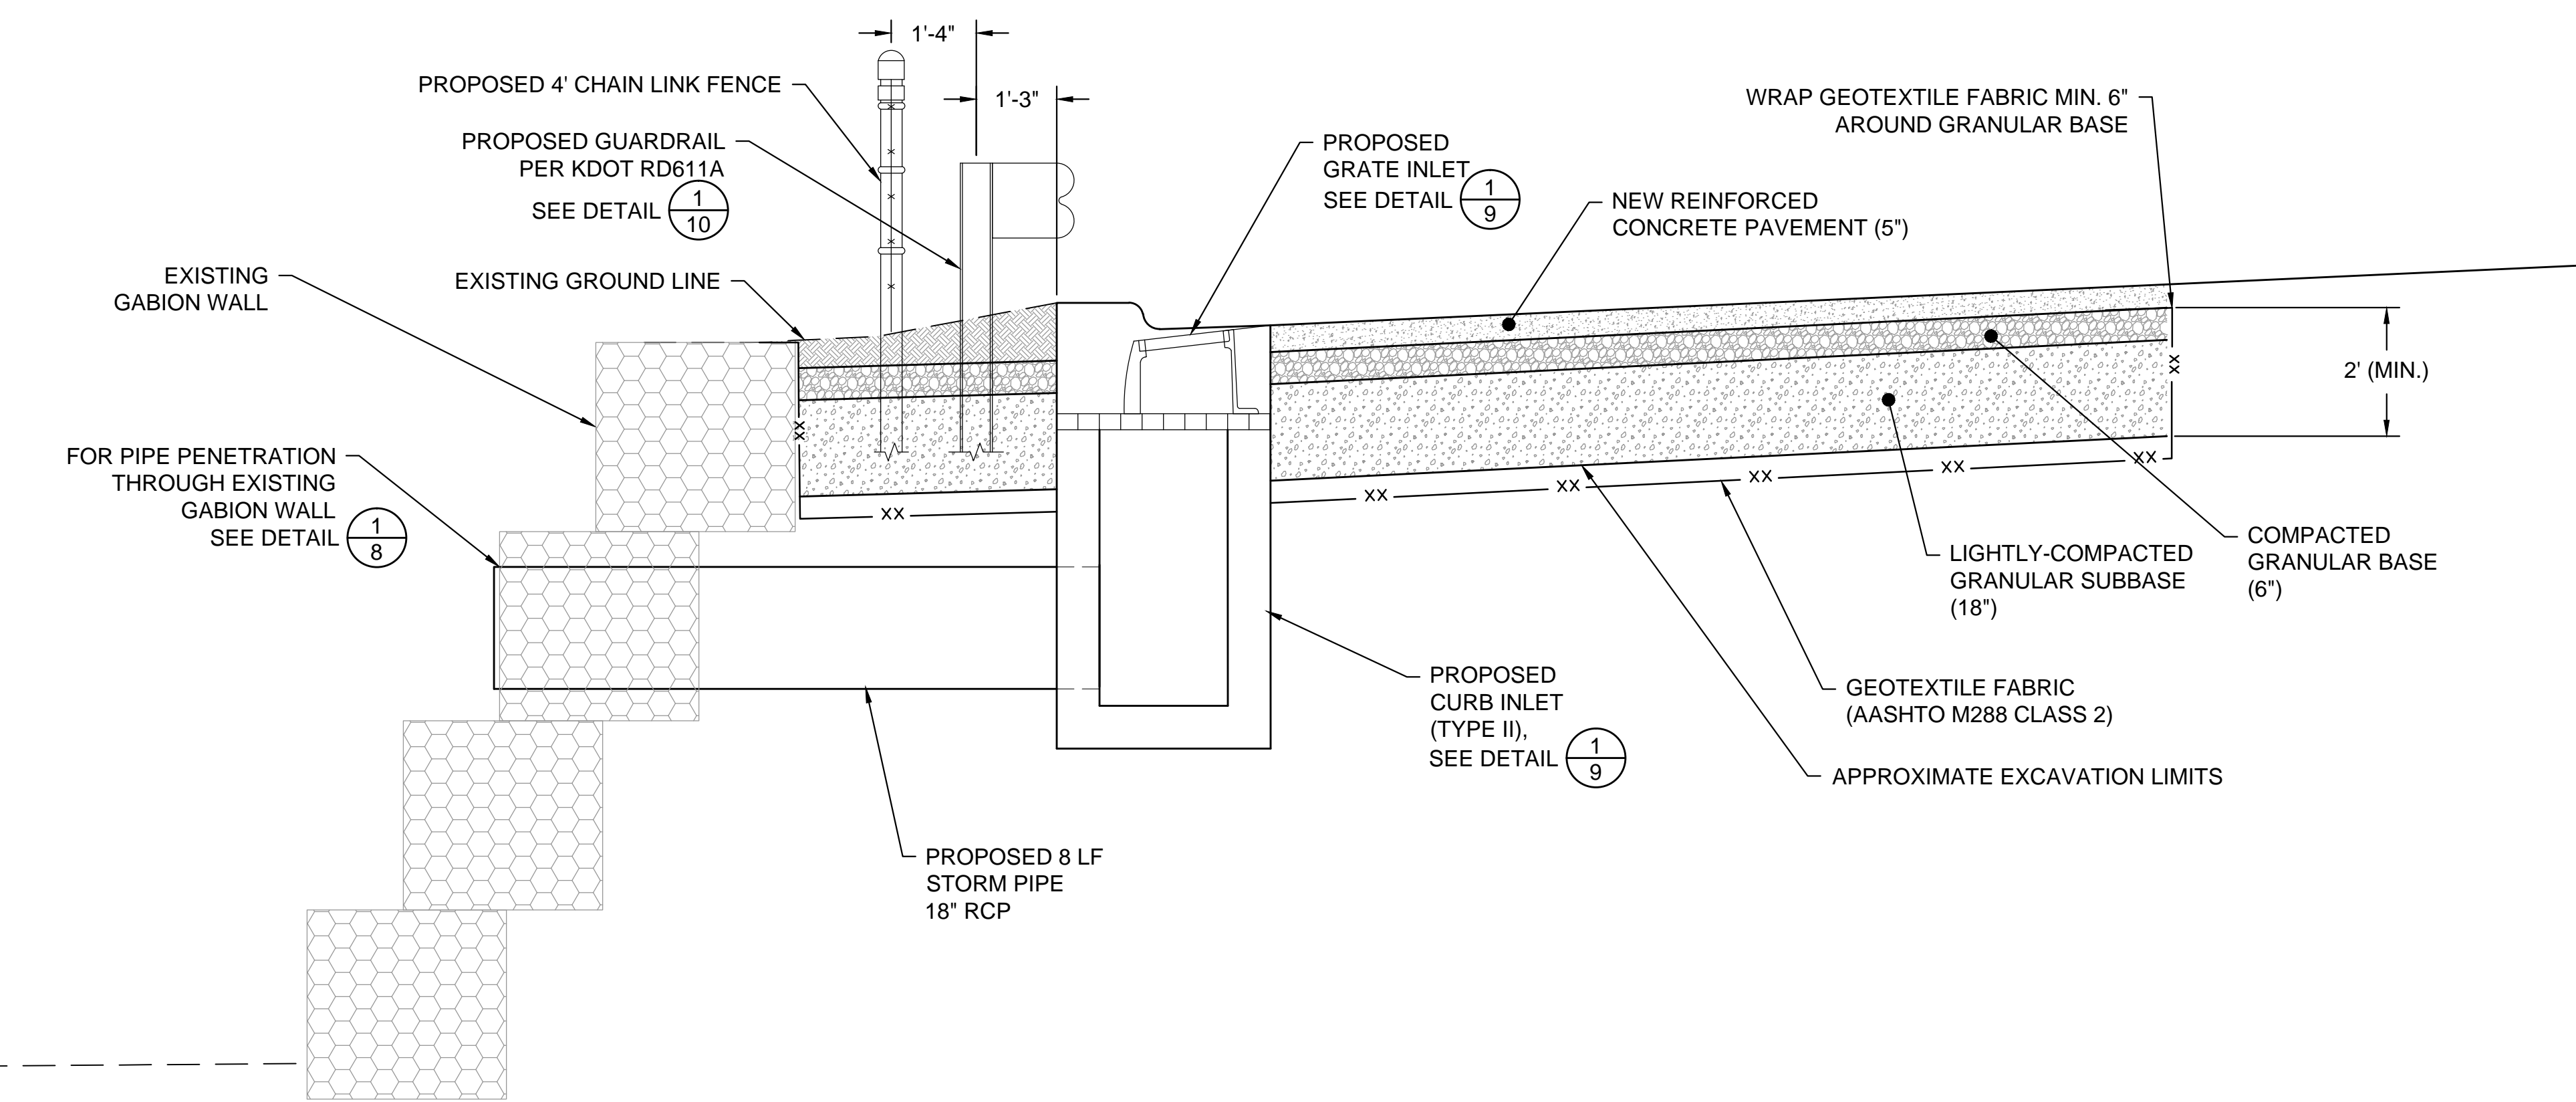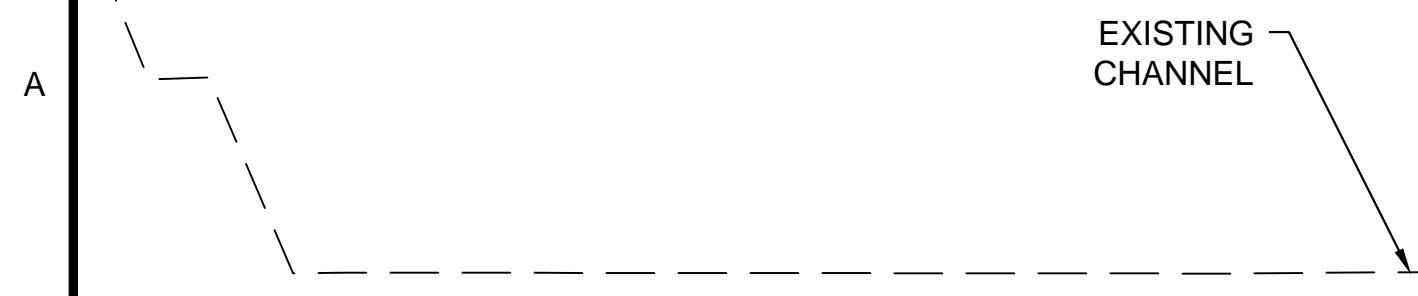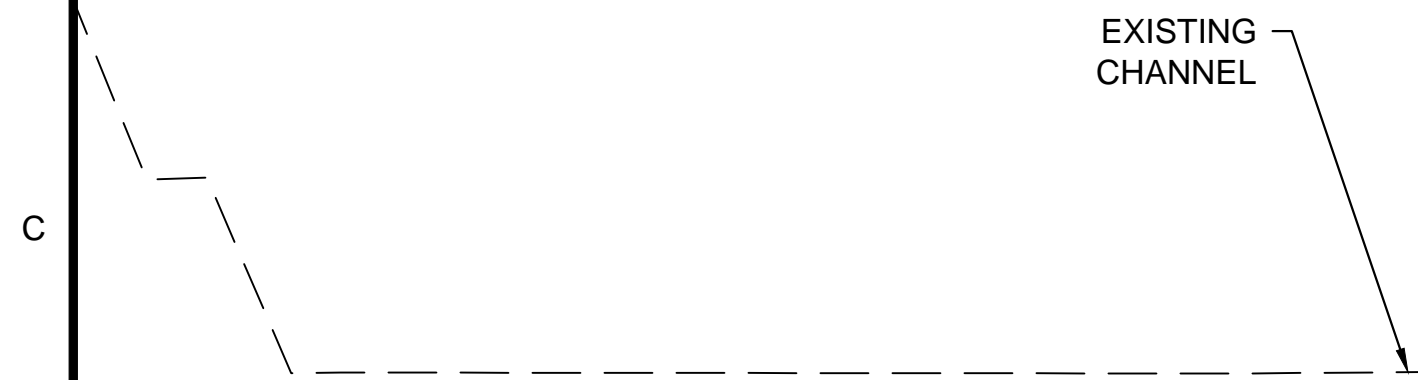

1
6 TYPICAL INLET SECTION
SCALE: HORIZONTAL 1"=2'
VERTICAL 1"=2'

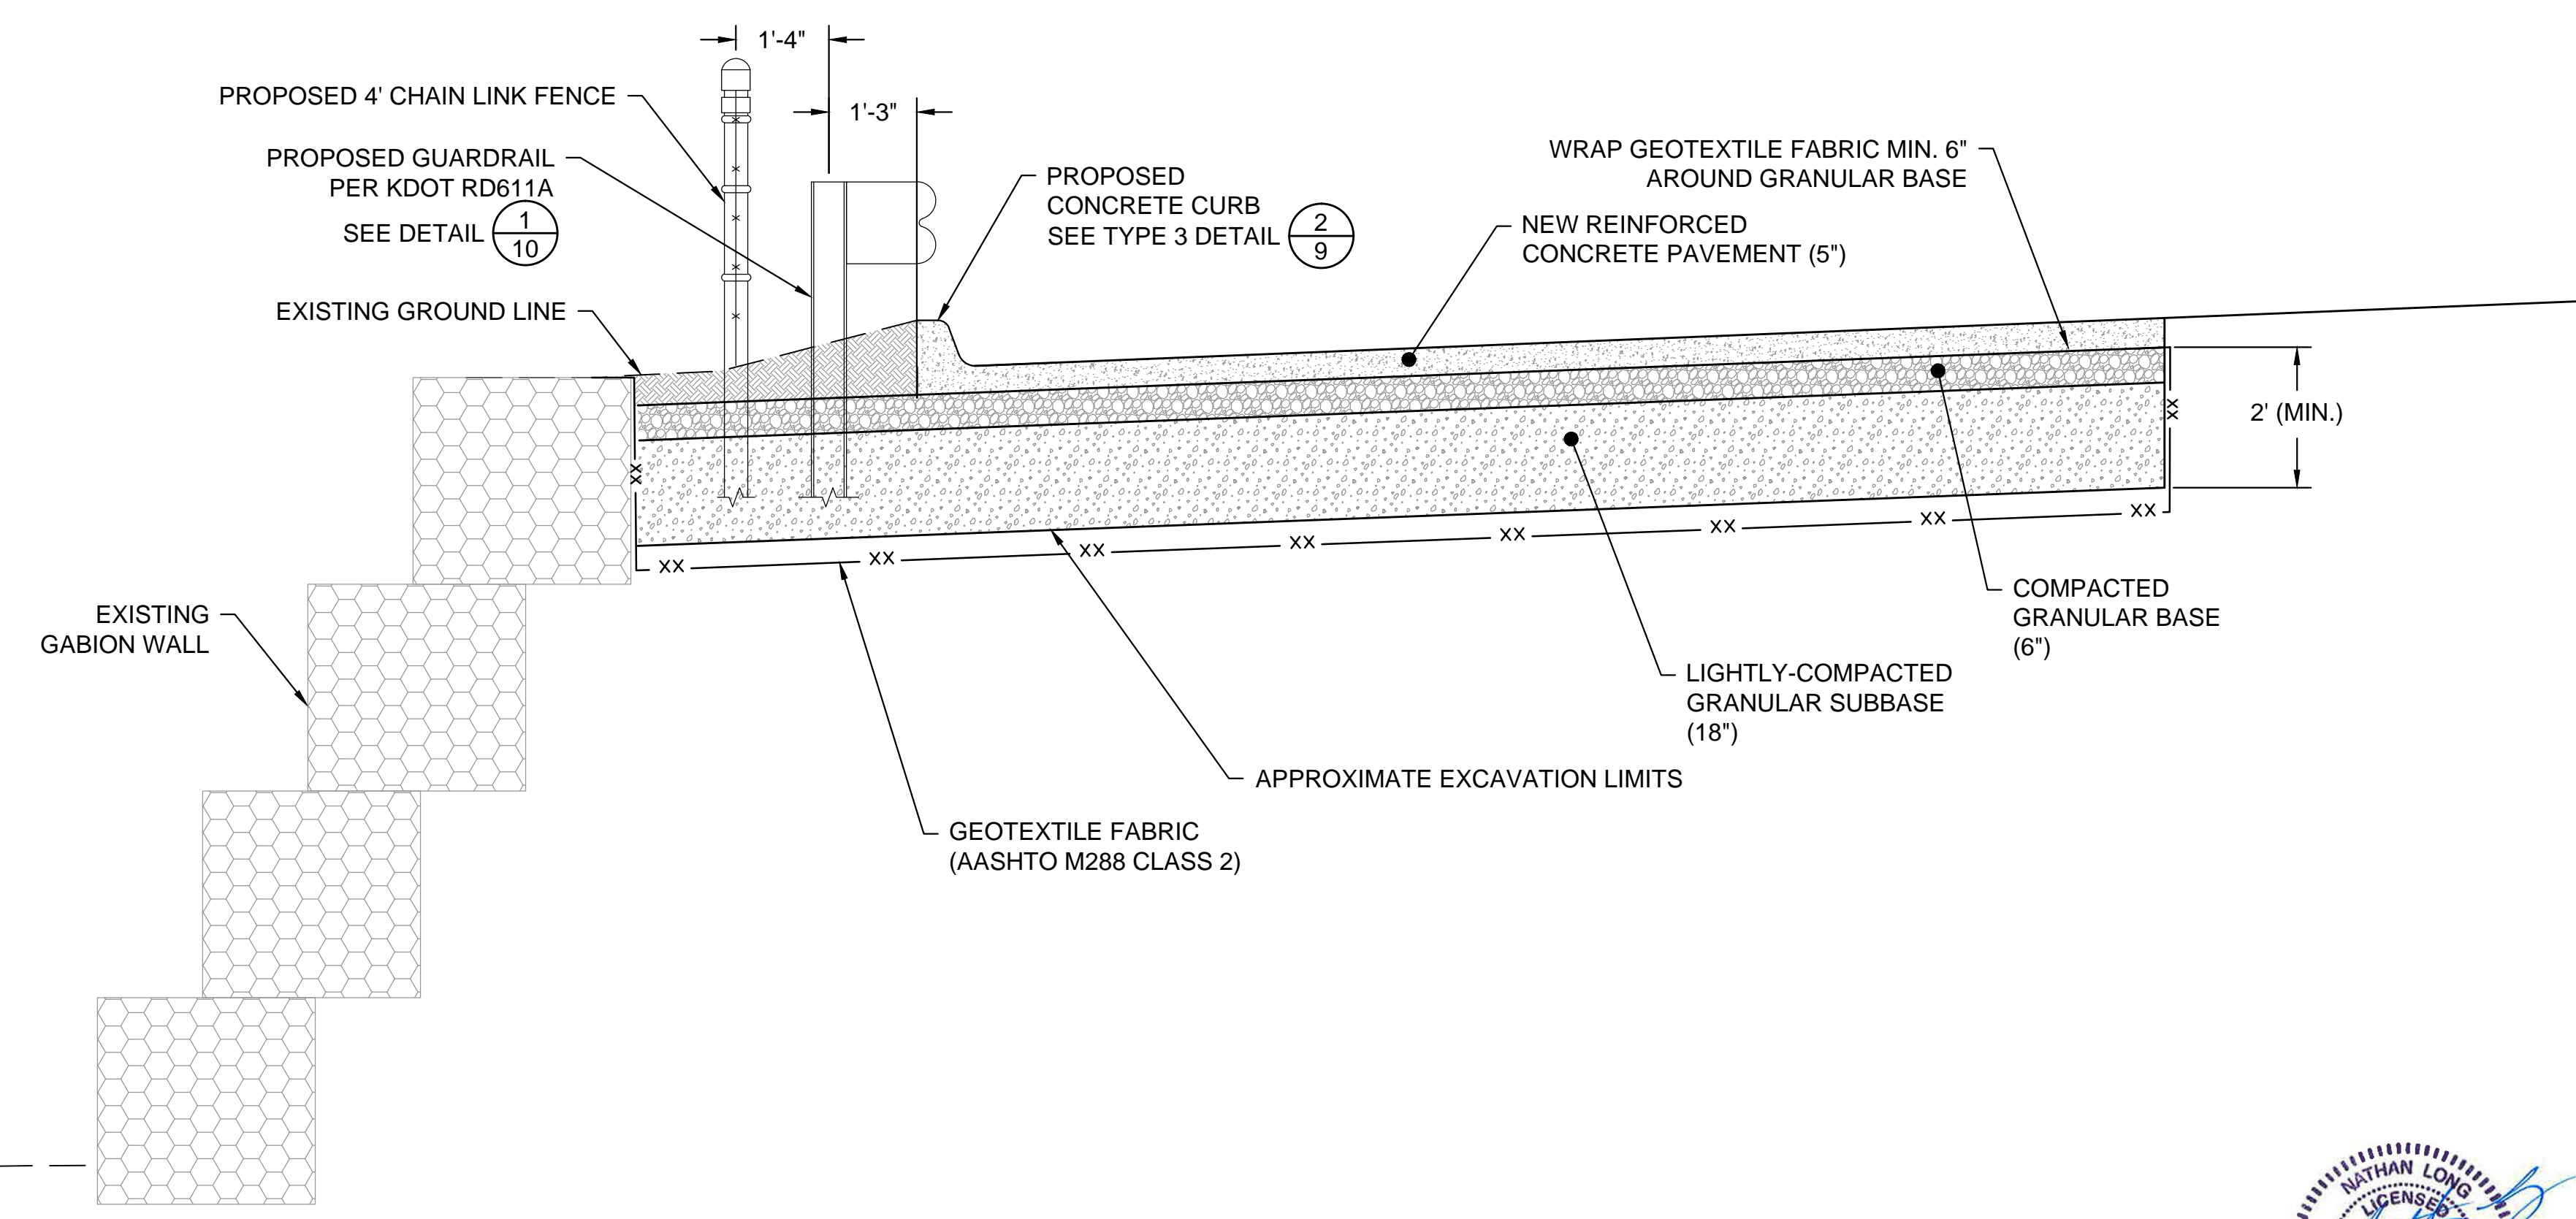

2
6 TYPICAL REPAIR SECTION
SCALE: HORIZONTAL 1"=2'
VERTICAL 1"=2'


NOTES:

- IF VOIDS ARE ENCOUNTERED BENEATH THE EXISTING PAVEMENT THAT EXTEND TO DEPTHS GREATER THAN 30 INCHES BELOW THE PROPOSED FINAL PAVEMENT SURFACE, BACKFILL THE VOIDS WITH ENGINEERED SOIL FILL. THE GEOTEXTILE FABRIC SHOULD EXTEND ALONG THE SIDES AND BOTTOM OF THE ENGINEERED FILL.
- SIX INCHES OF CRUSHED CONCRETE BASE IS ACCEPTABLE IN LIEU OF SIX INCHES OF COMPACTED GRANULAR BASE. SEE CITY'S STANDARD SPECIFICATIONS.
- SEED TOPSOIL AREAS BEHIND CURBS IN ACCORDANCE WITH CITY OF WICHITA STANDARDS AND SPECIFICATIONS, SECTION 902.
- DRILL AND EPOXY 5/8" DIAMETER x 12" LONG SMOOTH DOWELS INTO EXISTING CONCRETE AT SAWCUTS. DOWELS SHALL BE SPACED AT 12" CENTERS AND EMBEDDED A MINIMUM OF 5" ON EACH SIDE OF JOINT.



DATE	04/05/2017	DATE	APPR
DESIGNED BY	FILE NAME	DESCRIPTION	MARK
DRAWN BY	1	ADDITIONUM 1	1

DESIGNED BY	DATE	PROJECT NO.	FILE NAME
DRAWN BY	OCTOBER 31, 2016	8-2790-0252	ADDITIONUM 1
CHECKED BY			
SCALE			
AS SHOWN			

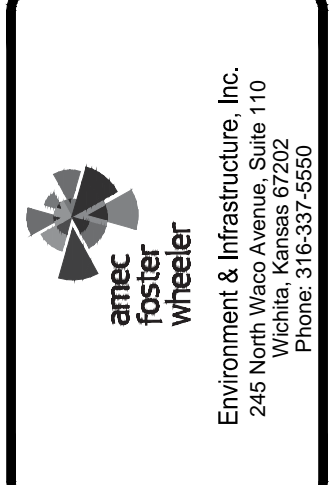

100% DESIGN

SWS #711 - WEST BRANCH DRY CREEK OF GYPSUM CREEK SWS IMPROVEMENTS
5119 E. KELLOGG DR., DOPPS CHIROPRACTIC PARKING LOT

TYPICAL SECTIONS

SHEET IDENTIFICATION
6
SHEET 6 OF 11