
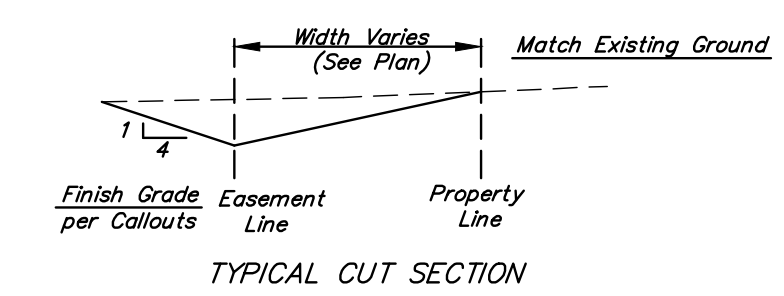


SECTION A-A

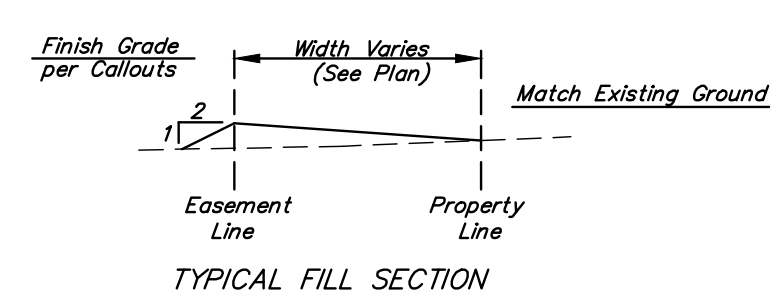

SECTION B-B

Section A-A shall be used on interior easements. Section B-B shall be used on easements that abut adjacent property or R/W of S. Anderson. The elevation at the property line shall match existing grade.

- = Easements To Be Graded
- = Proposed Spot Grade

The Contractor shall grade the easements as shown to the elevations given on the easement grading plan.

The Contractor shall 'straight' grade the easements between the elevations given. Where a callout designates 'Match', the Contractor will grade to the existing ground elevation.

All cost to be included in the Lump Sum bid item "Easement Grading"

EROSION CONTROL MEASURE	UNITS	QUANTITY
CURB INLET BARRIER	EA.	4 (INSTALL)
CONSTRUCTION ENTRANCE	EA.	1 (INSTALL)
DROP INLET BARRIER	EA.	4 (INSTALL)
BACK OF CURB PROTECTION	L.F.	2,491 (INSTALL)

EROSION CONTROL PLAN LEGEND
(Installation Details Found in the SWP2 Plan)

- CONSTRUCTION ENTRANCE
 - DROP INLET PROTECTION
 - DITCH CHECK
 - BACK OF CURB PROTECTION
 - EASEMENTS TO BE GRADED
 - CURB INLET PROTECTION
 - SILT FENCE
- NO SCALE

	Auburn Hills 16th Addition - Phase IC	
	Erosion Control and Easement Grading Plan	
Paving Improvements		
Baughman Company, P.A. 315 Ellis St. Wichita, KS 67211 P 316-262-7271 F 316-262-0149		
ENGINEERING SURVEYING PLANNING LANDSCAPE ARCHITECTURE		
PROJECT NUMBER 472-85032	DESIGN DMV	DRAWN DMV
REVISIONS:	APPROVED	DATE 04/03/17
	SCALE 1" = 80'	SHEET
		13 OF 23

AuburnHills16th\Phase IC\StrECpln